

Right-Angle 4mm Male Banana Plug to Right-Angle 4mm Male Banana Plug Lead



**RoHS
Compliant**




Applications

To connect to devices with 4mm banana sockets on the front face.
General purpose electric testing, controlling and measuring.

Characteristics

- Electrical Safety** : According to EN / IEC 61010-031:2008 : 1000V CAT II / 1000V CAT III / 600 V CAT IV, reinforced insulation, 12A (at +40°C).
These specifications come from the creepage distances, clearances, accessible parts, and solid insulation of the lead. And the considered specifications of the environment are: Pollution degree, 1 or 2; Relative humidity, 80% maximum for temperatures up to 31°C decreasing linearly to 50% relative humidity at +40°C
Temperature range, +5°C to +40°C, Indoor use ; Altitude, 2000 m maximum.
According to EN / IEC 60529 : IP2X (touchproof).
- Operating Temperature** : -20°C to +80°C
- Materials** : Conductors: Nickel-coated brass and red annealed copper.
Wire jackets: PVC or silicone. Insulators and lantern contact spring
- Colour** : Red and Black
- Overall Length** : 1 meter (100cm) & 1.5 meter (150cm)

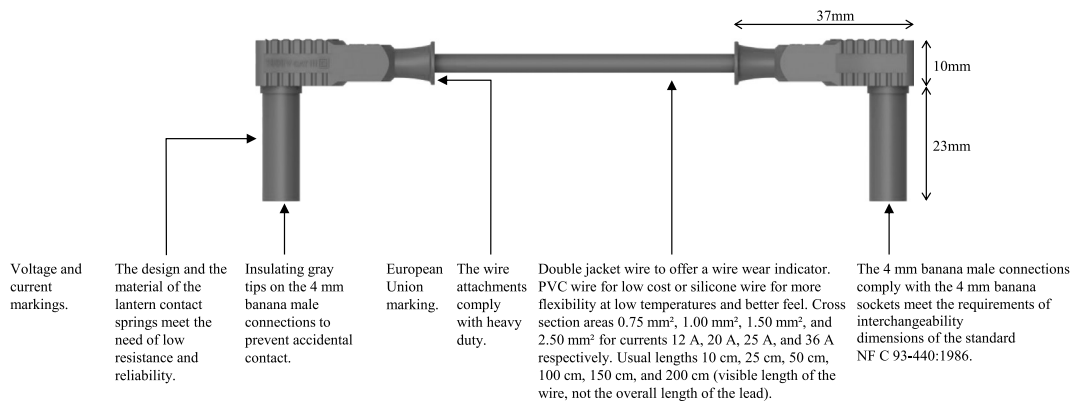

Part Number Table

| Description | Length | Colour | Part Number |
|---|--------|--------|-------------|
| Right-Angle 4mm Male Banana Plug to Right-Angle 4mm Male Banana Plug Lead | 1m | Red | 76-022 |
| | | Black | 76-023 |
| | 1.5m | Red | 76-024 |
| | | Black | 76-025 |

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Tenma is the registered trademark of the Group. © Premier Farnell Limited 2016.



X-ON Electronics

Authorized Distributor

Click to view similar products for [Tenma manufacturer](#).

Other Similar products are found below :

[2110130UKEU](#) [2110140](#) [2110142](#) [2110144](#) [2110146](#) [2110148](#) [2110150](#) [2110152](#)
[2110154](#) [2110156](#) [2110158](#) [2110160](#) [2110162](#) [2110164](#) [2110168](#) [2110170](#) [211040](#)
[211041](#) [211042](#) [211045](#) [211046](#) [211047](#) [211050](#) [2110562](#) [2110563](#)