

# Single phase, primary switched mode power supply **PM-0124-010-0**



Picture shows PM-0124-040-0

## Advantages

Stabilised and adjustable output voltage
Low stand-by consumption <1 W
Constant current characteristic
DC OK signalling
Parallel operation option
Push-in terminals
Panel installation on mounting rails
Conform to EN 60335-1

## Applications

Efficient, primary switched mode power supply in slim plastic housing. A powerful and flexible option that's still light and compact. Our real all-rounders, these power supply units are suitable for a highly diverse range of applications in solar, measurement and control technology as well as industrial and building automation. The devices cover the lower and average power requirements from 25 W to 100 W. Versions with 12 V, 24 V, and 48 V are available, enabling a whole range of applications. A version with 3.8 A rated current is available for establishing NEC Class 2 circuits. All power supplies also comply with the EN 60335-1 standard for domestic appliances. The output voltage can be easily set using the rotary potentiometer on the front of the housing. The DIN rail fastening method and push-in connection terminals enable fast and secure mounting.

## Standards

Primary switched mode power supply  
to UL 60950, UL 508

Safety:  
EN 61558-2-16, EN 60950-1, EN 60335-1

EMC:  
EN 61204-3

## Approvals



UL/CSA 60950 recognised, UL508 listed, Germanischer Lloyd




# Single phase, primary switched mode power supply

## PM-0124-010-0

Type		PM-0124-010-0
<b>Electrical data</b>	<b>Input</b>	
	Input rated voltage	100 - 240 Vac
	Input voltage range	85 - 264 Vac (120 - 373 Vdc)
	Input voltage derating	-2.5 %/Vac < 95 Vac
	Rated frequency range	44 Hz - 66 Hz / 0 Hz
	Input rated current (rated load)	0.43 A (100 Vac) / 0.2 A (240 Vac)
	Starting current limiter	< 30 A, NTC
	Switch-on time	2.3 s (100 Vac) / 0.74 s (230 Vac)
	Power factor	0.48
	Input fuse internal	2 A
	Recommended back-up fuse (circuit breaker)	6 A, 10 A, 16 A, characteristic B, C
	Mains buffering	20 ms (100 Vac) / 120 ms (230 Vac)
	Transient surge voltage protection	Varistor
	<b>Output</b>	
	Output rated voltage	24 Vdc
	Output voltage range	23 - 28,5 Vdc
	Output rated current	1 A
	Output limited current	1.25 ... 1.4 A (constant current)
	Class 2 output (UL Limited Power Source, LPS)	Yes
	Parallel connection	Yes
	Serial operation	Yes
	Power dissipation, no load/rated load	< 1 W / 4 W (230 Vac)
	Max. power losses	5 W (100 Vac / 24 V / 1 A)
	Ripple factor	typ. 20 mVss
	Resistance to reverse feed max.	35 Vdc
	Over-voltage-protection	max. 39 Vdc
	Efficiency	86 %
<b>Signaling</b>		
Typ. switching threshold for LED and signal output (DC OK)	-	
Status indicator	LED green Uout > typ. 21.5 Vdc LED lit permanently	
Signal output	Active high signal Uout > typ. 21.5 Vdc max. 20 mA@24 Vdc short circuit proof	
<b>Approvals</b>		
Approvals	cURus, cULus, GL	
<b>Environment</b>		
Storage temperature	-25° C ... +85° C	
Ambient temperature	-25° C ... +70° C	
Derating	-3 %/K > +50° C	
Mounting position	horizontal for standard rail DIN TH 35	
Cooling method	Natural convection	
Required minimum spacing (left/right)	0 mm	
Required minimum spacing (over/under)	50 mm	
<b>Safety and protection</b>		
Protection index	IP 20	
Safety class	II, without PE connection	
<b>Order numbers</b>		
<b>Order Number</b>	<b>PM-0124-010-0</b>	

Type		PM-0124-010-0
<b>Mechanical data</b>	<b>Input</b>	
	Connections input (direct plug-in technology Push-In)	max 2,5 mm <sup>2</sup>
	<b>Output</b>	
	Connections output (direct plug-in technology Push-In)	max 2,5 mm <sup>2</sup>
	<b>Signaling</b>	
	Connections signalling (direct plug-in technology Push-In)	max 2,5 mm <sup>2</sup>
<b>Measures and weights</b>		
Weight	0.13 kg	
Dimension (W x H x D)	22.5 x 90 x 90.5 mm	

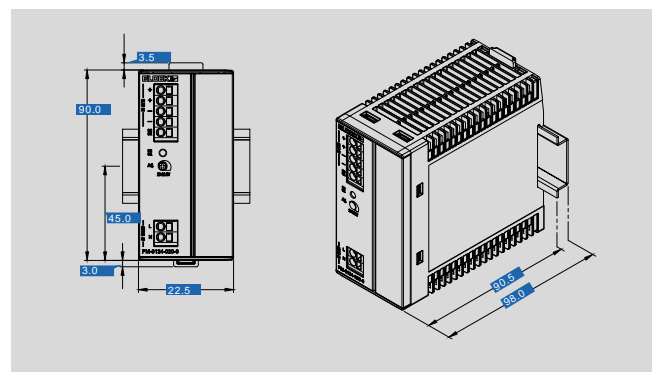

Subjects to change.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Block manufacturer](#):*

Other Similar products are found below :

[PVSB 400/24-20](#) [RKD 40/2X18](#) [RKD 120/2X24](#) [AVB1.0/2/12](#) [FL52/24](#) [FL6/24](#) [AVB0.5/2/6](#) [AVB2.3/2/6](#) [STEU63/23](#) [VB 0.35/1/15](#) [LR3 48-3/80](#) [LR3 48-5/70](#) [LR3 60-3/70](#) [PC-0148-100-0](#) [PC-0324-100-0](#) [PM-0748-400-0](#) [EB-2724-060-0](#) [PVUA 24/24-20](#) [RKD 100/2X24](#) [VB1.5/2/24](#) [FL4/18](#) [TIM500](#) [VB2.3/2/9](#) [AVB3.2/2/6](#) [STEU320/23](#) [STEU100/24](#) [VB 1.5/2/8](#) [SAT600](#) [LR3 48-5/80](#) [LR3 48-5/90](#) [PM-0124-020-0](#) [PM-0148-020-0](#) [PM-0724-120-0](#) [EB-1824-010-0](#) [STEU160/48](#) [FL10/24](#) [FL14/18](#) [SAT200](#) [DCT24-1.5](#) [FL18/6](#) [FL24/6](#) [VB2.3/2/24](#) [VB2.8/2/15](#) [LR3 48-5/16](#) [PM-0112-040-0](#) [PM-0112-070-0](#) [STEU63/24](#) [FL18/12](#) [FL24/24](#) [STEU250/24](#)