

Single phase, primary switched mode power supply **PM-0124-038-0**



Picture shows PM-0124-040-0

Advantages

Stabilised and adjustable output voltage
Low stand-by consumption <1 W
Constant current characteristic
DC OK signalling
Parallel operation option
Push-in terminals
Panel installation on mounting rails
Conform to EN 60335-1

Applications

Efficient, primary switched mode power supply in slim plastic housing. A powerful and flexible option that's still light and compact. Our real all-rounders, these power supply units are suitable for a highly diverse range of applications in solar, measurement and control technology as well as industrial and building automation. The devices cover the lower and average power requirements from 25 W to 100 W. Versions with 12 V, 24 V, and 48 V are available, enabling a whole range of applications. A version with 3.8 A rated current is available for establishing NEC Class 2 circuits. All power supplies also comply with the EN 60335-1 standard for domestic appliances. The output voltage can be easily set using the rotary potentiometer on the front of the housing. The DIN rail fastening method and push-in connection terminals enable fast and secure mounting.

Standards

Primary switched mode power supply for NEC Class 2 applications to UL 60950, UL 508

Safety:
EN 61558-2-16, EN 60950-1, EN 60335-1

EMC:
EN 61204-3

Approvals



UL/CSA 60950 recognised, UL508 listed, Germanischer Lloyd




Single phase, primary switched mode power supply

PM-0124-038-0

Type		PM-0124-038-0
Electrical data	Input	
	Input rated voltage	100 - 240 Vac
	Input voltage range	85 - 264 Vac (120 - 373 Vdc)
	Input voltage derating	-2.5 %/Vac < 95 Vac
	Rated frequency range	44 Hz - 66 Hz / 0 Hz
	Input rated current (rated load)	1.5 A (100 Vac, 91 W) / 0.6 A (240 Vac, 91 W)
	Starting current limiter	< 30 A, NTC
	Switch-on time	<0.5 s (100 Vac) / <0.2 s (230 Vac)
	Power factor	0.5
	Input fuse internal	4 A
	Recommended back-up fuse (circuit breaker)	6 A, 10 A, 16 A, characteristic B, C
	Mains buffering	>15 ms (100 Vac) / >80 ms (230 Vac)
	Transient surge voltage protection	Varistor
	Output	
	Output rated voltage	24 Vdc
	Output voltage range	23 - 28.5 Vdc (> 24 Vdc constant capacity)
	Output rated current	3.8 A / NEC Class 2
	Output limited current	3.8 ... 3.2 A (constant current, Class 2)
	Class 2 output (UL Limited Power Source, LPS)	Yes
	Parallel connection	Yes
	Serial operation	Yes
	Power dissipation, no load/rated load	2.8 W / 14 W (230 Vac)
	Max. power losses	<20 W (100 Vac / 91 W)
	Ripple factor	typ. 20 mVss
	Resistance to reverse feed max.	35 Vdc
	Over-voltage-protection	max. 40 Vdc
	Efficiency	87 %
	Signaling	
	Typ. switching threshold for LED and signal output (DC OK)	-
	Status indicator	LED green Uout > typ. 21.5 Vdc LED lit permanently
Signal output	Active high signal Uout > typ. 21.5 Vdc max. 20 mA@24 Vdc short circuit proof	
Approvals		
Approvals	cURus, cULus, GL	
Environment		
Storage temperature	-25° C ... +85° C	
Ambient temperature	-25° C ... +70° C	
Derating	-3 %/K > +50° C	
Mounting position	horizontal for standard rail DIN TH 35	
Cooling method	Natural convection	
Required minimum spacing (left/right)	0 mm	
Required minimum spacing (over/under)	50 mm	
Safety and protection		
Protection index	IP 20	
Safety class	II, without PE connection	
Order numbers		
Order Number	PM-0124-038-0	

Type		PM-0124-038-0
Mechanical data	Input	
	Connections input (direct plug-in technology Push-In)	max 2,5 mm ²
	Output	
	Connections output (direct plug-in technology Push-In)	max 2,5 mm ²
	Signaling	
Connections signalling (direct plug-in technology Push-In)	max 2,5 mm ²	
Measures and weights		
Weight	0.39 kg	
Dimension (W x H x D)	52 x 90 x 103.5 mm	

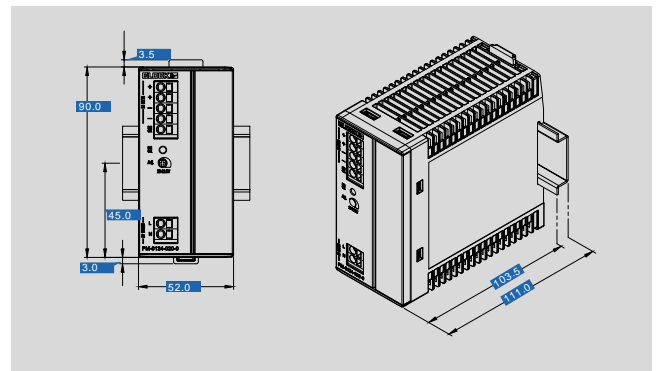

Subjects to change.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Block manufacturer](#):

Other Similar products are found below :

[PVSB 400/24-20](#) [RKD 40/2X18](#) [RKD 120/2X24](#) [AVB1.0/2/12](#) [FL52/24](#) [FL6/24](#) [AVB0.5/2/6](#) [AVB2.3/2/6](#) [STEU63/23](#) [VB 0.35/1/15](#) [LR3 48-3/80](#) [LR3 48-5/70](#) [LR3 60-3/70](#) [PC-0148-100-0](#) [PC-0324-100-0](#) [PM-0748-400-0](#) [EB-2724-060-0](#) [PVUA 24/24-20](#) [RKD 100/2X24](#) [VB1.5/2/24](#) [FL4/18](#) [TIM500](#) [VB2.3/2/9](#) [AVB3.2/2/6](#) [STEU320/23](#) [STEU100/24](#) [VB 1.5/2/8](#) [SAT600](#) [LR3 48-5/80](#) [LR3 48-5/90](#) [PM-0124-020-0](#) [PM-0148-020-0](#) [PM-0724-120-0](#) [EB-1824-010-0](#) [STEU160/48](#) [FL10/24](#) [FL14/18](#) [SAT200](#) [DCT24-1.5](#) [FL18/6](#) [FL24/6](#) [VB2.3/2/24](#) [VB2.8/2/15](#) [LR3 48-5/16](#) [PM-0112-040-0](#) [PM-0112-070-0](#) [STEU63/24](#) [FL18/12](#) [FL24/24](#) [STEU250/24](#)