

Single phase, primary switched mode power supply **PM-0148-020-0**



Picture shows PM-0124-040-0

Advantages

Stabilised and adjustable output voltage
Low stand-by consumption <1 W
Constant current characteristic
DC OK signalling
Parallel operation option
Push-in terminals
Panel installation on mounting rails
Conform to EN 60335-1

Applications

Efficient, primary switched mode power supply in slim plastic housing. A powerful and flexible option that's still light and compact. Our real all-rounders, these power supply units are suitable for a highly diverse range of applications in solar, measurement and control technology as well as industrial and building automation. The devices cover the lower and average power requirements from 25 W to 100 W. Versions with 12 V, 24 V, and 48 V are available, enabling a whole range of applications. A version with 3.8 A rated current is available for establishing NEC Class 2 circuits. All power supplies also comply with the EN 60335-1 standard for domestic appliances. The output voltage can be easily set using the rotary potentiometer on the front of the housing. The DIN rail fastening method and push-in connection terminals enable fast and secure mounting.

Standards

Primary switched mode power supply
to UL 60950, UL 508

Safety:
EN 61558-2-16, EN 60950-1, EN 60335-1

EMC:
EN 61204-3

Approvals



UL/CSA 60950 recognised, UL508 listed, Germanischer Lloyd




Single phase, primary switched mode power supply

PM-0148-020-0

Type	PM-0148-020-0
Electrical data	
Input	
Input rated voltage	100 - 240 Vac
Input voltage range	85 - 264 Vac (120 - 373 Vdc)
Input voltage derating	-2.5 %/Vac < 95 Vac
Rated frequency range	44 Hz - 66 Hz / 0 Hz
Input rated current (rated load)	1.79 A (100 Vac) / 0.9 A (240 Vac)
Starting current limiter	< 30 A, NTC
Switch-on time	0.5 s (100 Vac) / 0.3 s (230 Vac)
Power factor	0.5
Input fuse internal	4 A
Recommended back-up fuse (circuit breaker)	6 A, 10 A, 16 A, characteristic B, C
Mains buffering	15 ms (100 Vac) / 80 ms (230 Vac)
Transient surge voltage protection	Varistor
Output	
Output rated voltage	48 Vdc
Output voltage range	40 - 56 Vdc
Output rated current	2 A
Output limited current	2.2 ... 2.4 A (constant current)
Class 2 output (UL Limited Power Source, LPS)	No
Parallel connection	Yes
Serial operation	Yes
Power dissipation, no load/rated load	< 1 W / 16.2 W (230 Vac)
Max. power losses	19.8 W (100 Vac / 48 V / 2 A)
Ripple factor	typ. 20 mVss
Resistance to reverse feed max.	63 Vdc
Over-voltage-protection	max. 60 Vdc
Efficiency	86 %
Signaling	
Typ. switching threshold for LED and signal output (DC OK)	-
Status indicator	LED green U _{out} > typ. 39 Vdc LED lit permanently
Signal output	Active high signal U _{out} > typ. 39 Vdc max. 10 mA@48 Vdc short circuit proof
Approvals	
Approvals	cURus, cULus, GL
Environment	
Storage temperature	-25° C ... +85° C
Ambient temperature	-25° C ... +70° C
Derating	-3 %/K > +50° C
Mounting position	horizontal for standard rail DIN TH 35
Cooling method	Natural convection
Required minimum spacing (left/right)	0 mm
Required minimum spacing (over/under)	50 mm
Safety and protection	
Protection index	IP 20
Safety class	II, without PE connection
Order numbers	
Order Number	PM-0148-020-0

Type	PM-0148-020-0
Mechanical data	
Input	
Connections input (direct plug-in technology Push-In)	max 2,5 mm ²
Output	
Connections output (direct plug-in technology Push-In)	max 2,5 mm ²
Signaling	
Connections signalling (direct plug-in technology Push-In)	max 2,5 mm ²
Measures and weights	
Weight	0.39 kg
Dimension (W x H x D)	52 x 90 x 103.5 mm

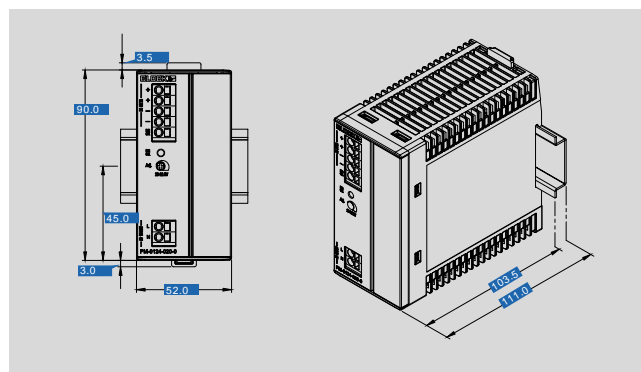

Subjects to change.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Other Tools](#) category:

Click to view products by [Block manufacturer](#):

Other Similar products are found below :

[CR-05FL7--150R](#) [CR-05FL7--698K](#) [899-2-KT46](#) [899-5-KT46](#) [CR-0AFL4--332K](#) [CR-12FP4--260R](#) [5718X-01PD-19RO](#) [CRCW04021100FRT7](#)
[CRCW04021961FRT7](#) [5800-0090](#) [CRCW04024021FRT7](#) [CRCW040254R9FRT7](#) [CRCW0603102JRT5](#) [59065-5](#) [00-8273-RDPP](#) [00-8729-WHPP](#)
[593033](#) [593058](#) [593072](#) [593564100](#) [593575](#) [593591](#) [593593](#) [LTI LA506SBLAMNBL](#) [CRCW08052740FRT1](#) [LUC-012S070DSM](#) [LUC-](#)
[018S070DSP](#) [599-2021-3-NME](#) [599-JJ-2021-03](#) [00-5080-YWPP](#) [5E4750/01-20R0-T/R](#) [LW1A-L1-GD](#) [LW1A-L1-GL](#) [LW1A-P1-GD](#) [LW1L-](#)
[A1C10V-GL](#) [LW1L-M1C70-A](#) [0202-0173](#) [00-9089-RDPP](#) [CRCW2010331JR02](#) [01-1003W-8/32-10](#) [601-GP-08-KT39](#) [601-JJ-06](#) [601-SPB](#)
[601YSY](#) [602-JJ-03](#) [602SPB](#) [602Z](#) [603-JJ-07-FP](#) [603-JJY-04](#) [604J](#)