




MIL-DTL-26482 Type Reverse Bayonet Coupling (Series IPT) with Single RJ45 Connector

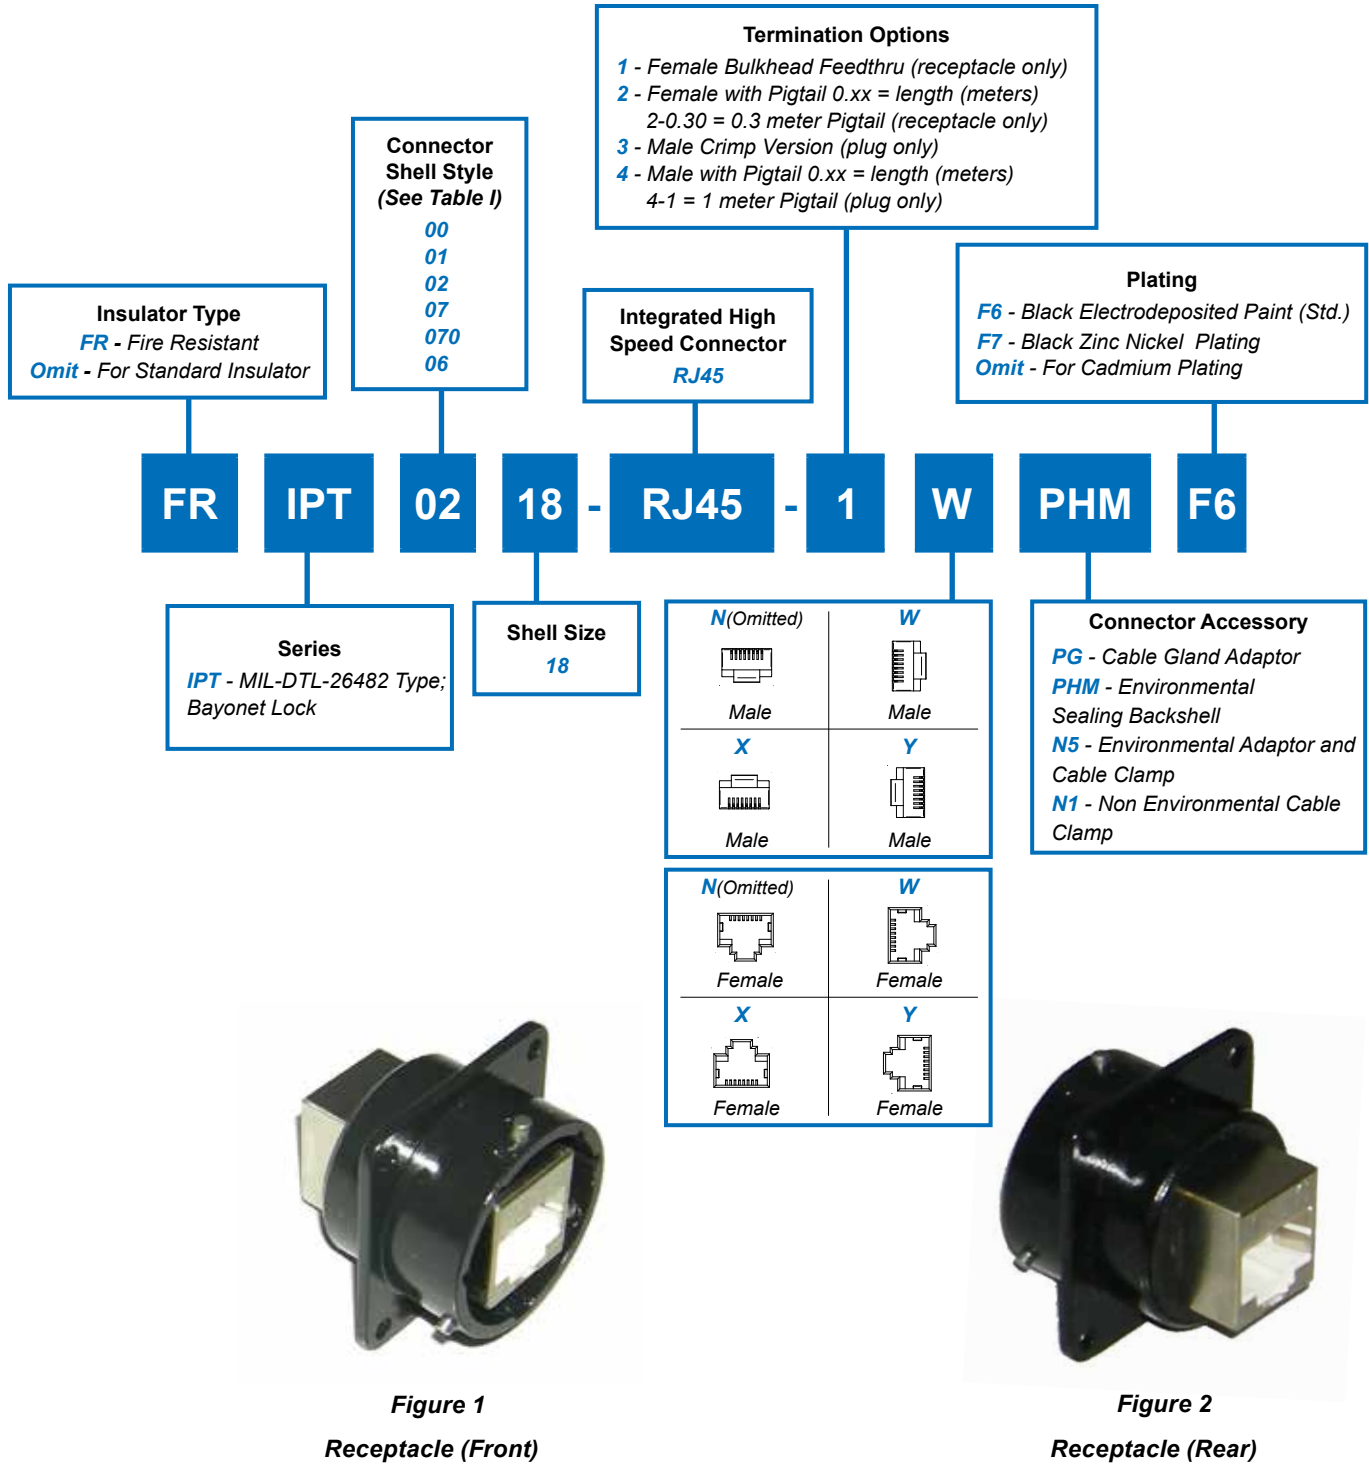

MIL-DTL-26482 Type Reverse Bayonet Coupling (Series IPT) with Single RJ45 Connector



TABLE I

**Connector Shell
Detailed Description**

**00 - Front Panel Mount
Square Flange Receptacle
with Accessory Threads**

**01 - In Line Cylindrical
Receptacle with Accessory
Threads**

**02 - Front Panel Mount
Square Flange Receptacle;
No Accessory Threads**

**07 - Rear Panel Mount
Jam Nut Receptacle; No
Accessory Threads**

**070 - Rear Panel Mount
Jam Nut Receptacle with
Accessory Threads**

**06 - Straight Cylindrical
Plug Connector with
Accessory Threads**

Commercial-grade RJ45 connectors are intended for use in clean, dry environments. Exposure to dirt and moisture can lead to damage or failure. Glenair's sealed RJ45 connectors provide a high level of protection for the most hostile environments. Standard RJ45 jacks are housed in rugged, waterproof IPT Series bayonet connectors. Connectors feature resilient nitrile inserts and electrodeposited corrosion-resistant black paint or black zinc nickel plating. Cadmium plating is also available. A typical IPT RJ45 application consists of a through bulkhead female receptacle (Figure 1 and 2) and a male plug crimp RJ45 (Figure 3).

TECHNICAL CHARACTERISTICS

Category	Cat. 6 (Cat 5E available upon request)
Connection	10BaseT, 100BaseTx, 1000BaseT
Working Voltage	30/42 Volts AC RMS/VDC
Max Current Rating	1.5 Amps at 20° C
Max Contact Resistance	20 mΩ
Min. Insulation Resistance	1.000 mΩ at 500 Volts DC
Dielectric Withstanding Voltage	1000 Volts
Working Temperature	-40° to +68° C
Environmental Rating	IP67 (mated)



**Figure 3
Plug (Front)**




**Figure 4
RJ45 Interconnection Sequence**





MIL-DTL-26482 Type Reverse Bayonet Coupling (Series IPT) with Single RJ45 Connector

CONFIGURATIONS AVAILABLE : IPT 00

Front View




FRIPT0018-RJ45-1PGF6

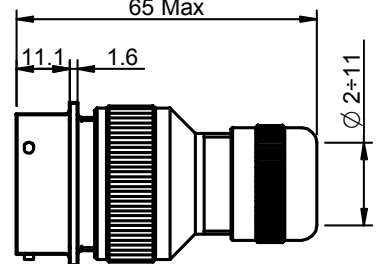



FRIPT0018-RJ45-1PHMF6

Front View




FRIPT0018-RJ45-1N5F6

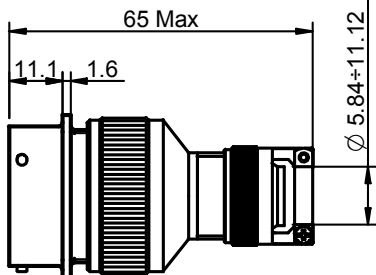



FRIPT0018-RJ45-1N1F6

CONFIGURATIONS AVAILABLE : IPT 01

Front View



FRIPT0118-RJ45-1PGF6

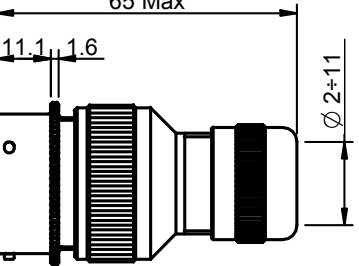

FRIPT0118-RJ45-1PHMF6



MIL-DTL-26482 Type Reverse Bayonet Coupling
(Series IPT)
with Single RJ45 Connector




High-Speed
Connectors

CONFIGURATIONS AVAILABLE : IPT 01

Front View

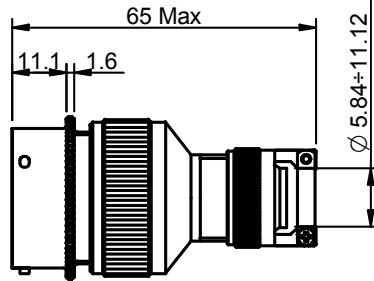



FRIPT0118-RJ45-1N5F6

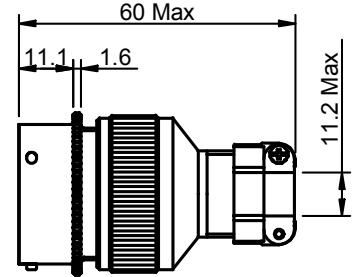


FRIPT0118-RJ45-1N1F6

CONFIGURATIONS AVAILABLE : IPT 070

Front View

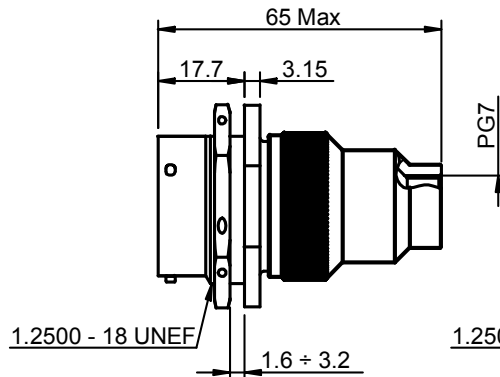



FRIPT07018-RJ45-1PGF6

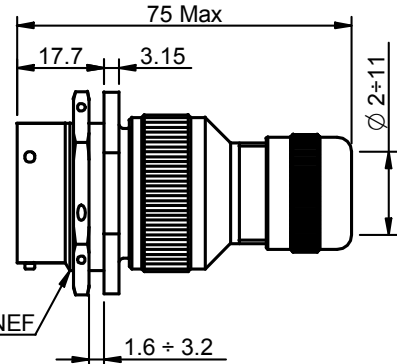


FRIPT07018-RJ45-1PHMF6

Front View

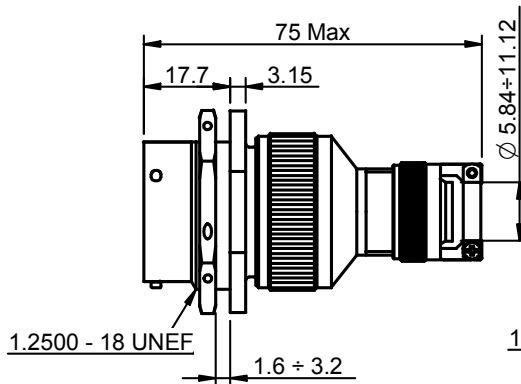

FRIPT07018-RJ45-1N5F6

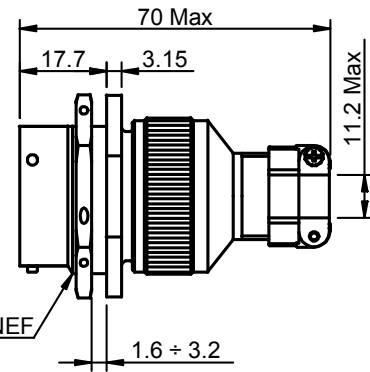

FRIPT07018-RJ45-1N1F6




Connectors



MIL-DTL-26482 Type Reverse Bayonet Coupling (Series IPT) with Single RJ45 Connector

CONFIGURATIONS AVAILABLE : IPT 06




Front View

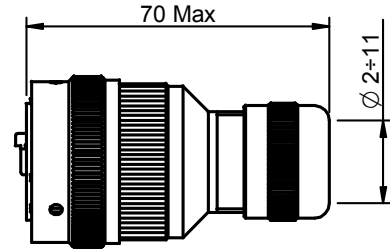

FRIPT0618-RJ45-3PGF6

FRIPT0618-RJ45-3PHMF6

Front View

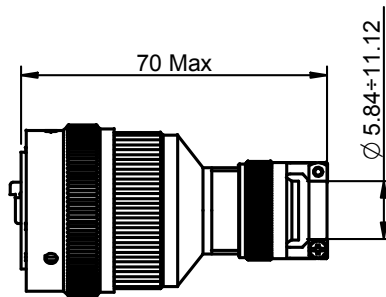



FRIPT0618-RJ45-3N5F6

FRIPT0618-RJ45-3N1F6

CONFIGURATIONS AVAILABLE : IPT 02 and IPT 07



02

Front View



FRIPT0218-RJ45-1F6

Front View

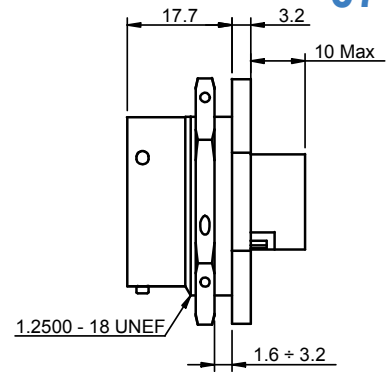

FRIPT0718-RJ45-1F6


07

MIL-DTL-26482 Type Reverse Bayonet Coupling
(Series IPT)
with Single RJ45 Connector



PIGTAIL GENERAL SKETCHES AND CONFIGURATIONS AVAILABLE

Female with Pigtail for Configuration : 00 - 01 - 030 - 070

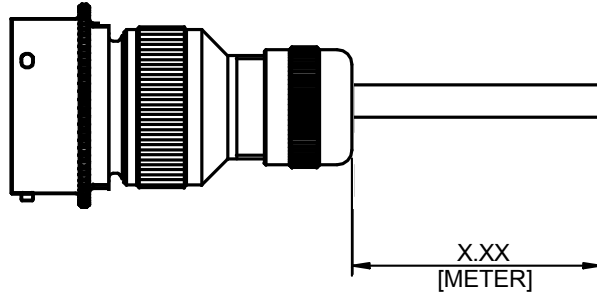

EXAMPLE : FRIPT0018-RJ45-21.5PHMF6 → 1.5 mt Pigtail


Female with Pigtail for Configuration : 00
FRIPT0018-RJ45-2X.xxN1F6
FRIPT0018-RJ45-2X.xxN5F6
FRIPT0018-RJ45- 2X.xxPHMF6
FRIPT0018-RJ45-2X.xxPGF6

Female with Pigtail for Configuration : 030
FRIPT03018-RJ45-2X.xxN1F6
FRIPT03018-RJ45-2X.xxN5F6
FRIPT3018-RJ45-2X.xxPHMF6
FRIPT03018-RJ45-2X.xxPGF6

Female with Pigtail for Configuration : 01
FRIPT0118-RJ45-2X.xxN1F6
FRIPT0118-RJ45-2X.xxN5F6
FRIPT0118-RJ45-2X.xxPHMF6
FRIPT0118-RJ45-2X.xxPGF6

Female with Pigtail for Configuration : 070
FRIPT07018-RJ45-2X.xxN1F6
FRIPT07018-RJ45-2X.xxN5F6
FRIPT07018-RJ45-2X.xxPHMF6
FRIPT07018-RJ45-2X.xxPGF6

Male with Pigtail for Configuration : 06

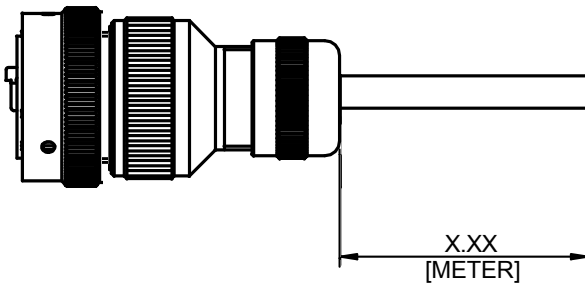

Female with Pigtail for Configuration : 06
FRIPT0618-RJ45-4X.xxN1F6
FRIPT0618-RJ45-4X.xxN5F6
FRIPT0618-RJ45-4X.xxPHMF6
FRIPT0618-RJ45-4X.xxPGF6

EXAMPLE : FRIPT0618-RJ45-41.5PHMF6 → 1.5 mt Pigtail

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Glenair manufacturer](#):

Other Similar products are found below :

[DC40-10L](#) [MWDM2R-9P-4K5-18H-464A](#) [MWDM2R-25P-6K5-58M-464A](#) [287-141S4H62Z2NA](#) [247-757-3](#) [805-001-16NF11-4SA](#)
[GMSM2-6SCBRSU1](#) [557-107M3-05CB](#) [370BS002B1608D6A](#) [450DS001N10-325](#) [MR75909P1BSU](#) [M85049/11-51W](#) [103-026-012](#)
[MS3181-18CA TOP](#) [891-001-25PS-0A7-18J](#) [5M2920-3CW](#) [6000-063-0022](#) [M28840/17AC1G3](#) [M28840/29CB1DAP1](#) [M32139/03-B06ST](#)
[M39029/88-488](#) [M83513/03-C16N](#) [M83513/04-E03N](#) [M85049130-07M](#) [M85049/1911N02](#) [M85049/39-17W](#) [M8504956-24N](#) [M85049/74-](#)
[10-1](#) [M8504988-17P03](#) [M8504988-21N03](#) [M8504992-11M](#) [D38999/23YE26SN](#) [759EA458NF32Z1732-40-102.9](#) [770-006S302](#) [801-025-](#)
[ARB2M6-4NA-12](#) [805-002-16M12-5SA](#) [809A060-5](#) [858-003-01F](#) [G8377-21B](#) [G8801-09N](#) [G8801-15N](#) [G8801-25N](#) [947-432ME21-11SN](#)
[947-432ME21-35PN](#) [GMR7580-51P3BPN-474A](#) [GMR7580-51P3BPN-474C](#) [GMR7580-51P3BPN-474D](#) [GMR7580-9P3BPN-474B](#)
[D38999/33W11N](#) [MWDL-37SCBRPT-.250](#)