


6~24W AC-DC UK Plugtop Power Supplies

- FR4 PCB
- 100% ATE Tested
- High Reliability
- Built in OVP, OCP & SCP
- 100% smart burn-in test for 4 hours
- Level VI Efficiency Regulations Compliant
- Universal Input 90~260V AC 47~63Hz



DIMENSIONS

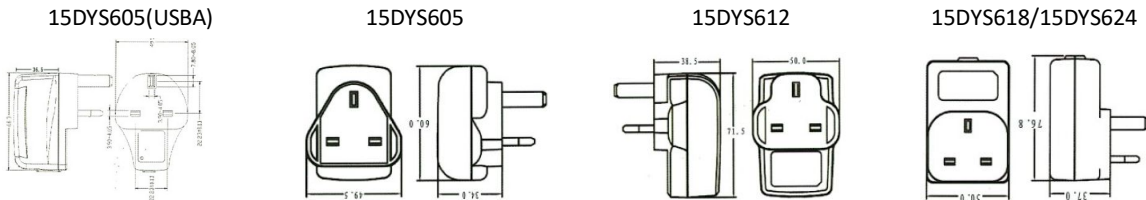

SPECIFICATIONS		15DYS605(USBA)	15DYS605	15DYS612	15DYS618	15DYS624
Input	Input Range	100~240VAC (Full Range), 50/60Hz				
	Input Current (RMS)	0.2A@90VAC 0.1A@264VAC		0.4A@90VAC 0.15A@264VAC	0.5A@90VAC 0.2A@264VAC	0.8@90VAC 0.4A@264VAC
Output	Voltage Range	5VDC	4~15VDC	4~24VDC		5~30VDC
	Voltage Regulation	+/- 5% At Constant Voltage Mode				
	Current Range	0.1~1.2A		0.1~2.4A	0.1~3.5A	0.1~4.0A
	Max Power	6W		12W	18W	30W
Energy Saving		NRCAN, DOE, ERP, GEMS, Efficiency Level VI				
Environmental Protection		RoHS, REACH, PAHS				
Environmental	Operating Temperature	0°C ~45°C Ambient				
	Storage Temperature	-20°C ~+80°C				
	Operating Humidity	10~90% (Non-condensing)				
	Relative Humidity	5~95% (Non-condensing)				
	MTBF	>25,000 hours at 80% load and 25°C ambient temperature				
Approvals		CE-EMC, LVD, RoHS & REACH				

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ideal manufacturer](#):

Other Similar products are found below :

[30-582](#) [VDV II PLUS](#) [45-915](#) [45-173](#) [45-098](#) [45-097](#) [L-5361](#) [45-093](#) [45-162](#) [41-990](#) [15DYS618-120150W-3](#) [15DYS624-050400W-K](#) [30-503](#) [35-020](#) [35-060](#) [35-516](#) [45-120](#) [45-1633-1](#) [45-170](#) [45-176](#) [45-1773-1](#) [45-1774](#) [45-1939-1](#) [45-2133-1](#) [45-298](#) [45-372](#) [45-404](#) [K-6336](#) [K-8906R](#) [L-4866](#) [L-9038](#) [LB-1091](#) [35-522](#) [61-775](#) [KB-0276R](#) [25HK-AB-050A400-CP](#) [30-593](#) [30-696](#) [33-856](#) [158050](#) [30-576](#) [45-672](#) [45-292](#) [45-129](#) [LB-1002](#) [30-793](#) [33-864](#) [45-1611-1](#) [R151005](#) [45-1513](#)