


18W AC-DC Interchangeable Power Supplies

- FR4 PCB
- 100% ATE Tested
- High Reliability
- Built in OVP, OCP & SCP
- 100% smart burn-in test for 4 hours
- Level VI Efficiency Regulations Compliant
- Universal Input 90~260V AC 47~63Hz



DIMENSIONS

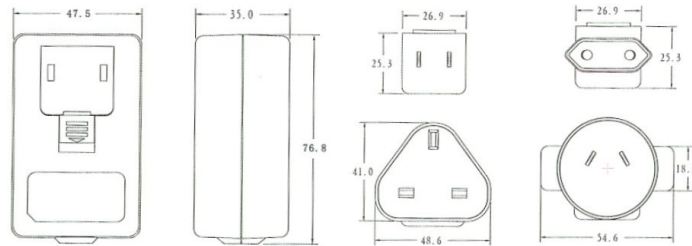

SPECIFICATIONS

| | | |
|---------------------------------|------------------------------|---|
| Input | Input Range | 100~240VAC (Full Range), 50/60Hz |
| | Input Current (RMS) | 0.5A@90VAC 0.2A@264VAC |
| Output | Voltage Range | 4~24VDC |
| | Voltage Regulation | +/- 5% At Constant Voltage Mode |
| | Current Range | 0.1~3.5A |
| | Max Power | 18W |
| Energy Saving | | NRCAN, DOE, ERP, GEMS, Efficiency Level VI |
| Environmental Protection | | RoHS, REACH, PAHS |
| Environmental | Operating Temperature | 0°C ~45°C Ambient |
| | Storage Temperature | -20°C ~+80°C |
| | Operating Humidity | 10~90% (Non-condensing) |
| | Relative Humidity | 5~95% (Non-condensing) |
| | MTBF | >25,000 hours at 80% load and 25°C ambient temperature |
| Approvals | | cETLus, TUV-GS, RCM (C-Tick), PSE, CCC, CB, FCC, CE, RoHS & REACH |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Ideal manufacturer](#):

Other Similar products are found below :

[30-582](#) [VDV II PLUS](#) [45-915](#) [45-173](#) [45-098](#) [45-097](#) [L-5361](#) [45-093](#) [45-162](#) [41-990](#) [15DYS618-120150W-3](#) [15DYS624-050400W-K](#) [30-503](#) [35-020](#) [35-060](#) [35-516](#) [45-120](#) [45-1633-1](#) [45-170](#) [45-176](#) [45-1773-1](#) [45-1774](#) [45-1939-1](#) [45-2133-1](#) [45-298](#) [45-372](#) [45-404](#) [K-6336](#) [K-8906R](#) [L-4866](#) [L-9038](#) [LB-1091](#) [35-522](#) [61-775](#) [KB-0276R](#) [25HK-AB-050A400-CP](#) [30-593](#) [30-696](#) [33-856](#) [158050](#) [30-576](#) [45-672](#) [45-292](#) [45-129](#) [LB-1002](#) [30-793](#) [33-864](#) [45-1611-1](#) [R151005](#) [45-1513](#)