


## 20~30W AC-DC Interchangeable Power Supplies

- FR4 PCB
- 100% ATE Tested
- High Reliability
- Built in OVP, OCP & SCP
- 100% smart burn-in test for 4 hours
- Level VI Efficiency Regulations Compliant
- Universal Input 90~264V AC 47~63Hz



### DIMENSIONS

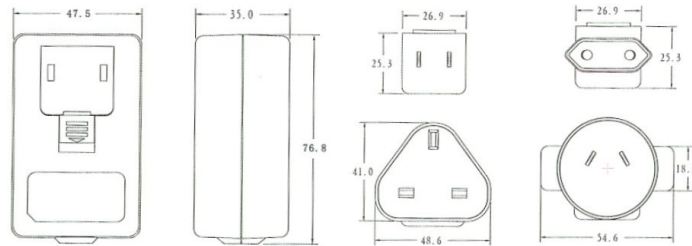

### SPECIFICATIONS

<b>Input</b>	<b>Input Range</b>	100~240VAC (Full Range), 50/60Hz
	<b>Input Current (RMS)</b>	0.8A@90VAC 0.4A@264VAC
<b>Output</b>	<b>Voltage Range</b>	5~30VDC
	<b>Voltage Regulation</b>	+/- 5% At Constant Voltage Mode
	<b>Current Range</b>	0.1~4A
	<b>Max Power</b>	30W
<b>Energy Saving</b>		NRCAN, DOE, ERP, GEMS, Efficiency Level VI
<b>Environmental Protection</b>		RoHS, REACH, PAHS
<b>Environmental</b>	<b>Operating Temperature</b>	0°C ~45°C Ambient
	<b>Storage Temperature</b>	-20°C ~+80°C
	<b>Operating Humidity</b>	10~90% (Non-condensing)
	<b>Relative Humidity</b>	5~95% (Non-condensing)
	<b>MTBF</b>	>25,000 hours at 80% load and 25°C ambient temperature
<b>Approvals</b>		cETLus, TUV-GS, RCM (C-Tick), PSE, CCC, CB, FCC, CE, RoHS & REACH

# X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Ideal manufacturer:](#)*

Other Similar products are found below :

[30-582](#) [VDV II PLUS](#) [45-915](#) [45-173](#) [45-098](#) [45-097](#) [L-5361](#) [45-093](#) [45-162](#) [41-990](#) [15DYS618-120150W-3](#) [15DYS624-050400W-K](#) [30-503](#) [35-020](#) [35-060](#) [35-516](#) [45-120](#) [45-1633-1](#) [45-170](#) [45-176](#) [45-1773-1](#) [45-1774](#) [45-1939-1](#) [45-2133-1](#) [45-298](#) [45-372](#) [45-404](#) [K-6336](#) [K-8906R](#) [L-4866](#) [L-9038](#) [LB-1091](#) [35-522](#) [61-775](#) [KB-0276R](#) [25HK-AB-050A400-CP](#) [30-593](#) [30-696](#) [33-856](#) [158050](#) [30-576](#) [45-672](#) [45-292](#) [45-129](#) [LB-1002](#) [30-793](#) [33-864](#) [45-1611-1](#) [R151005](#) [45-1513](#)