

PCRS_LCAX_LCAX_A221T_XX.X_SS

Description

Duplex patch cord, LC uniboot push-pull XD to LC uniboot push-pull XD, APC, duplex round 2.1mm_XX.X_yellow, SM G.657.A2, A-B / B-A



Features	Features
- High mechanical stability	
- Colour coded boot for good visibility also in mated condition	

Technical Data

General Data

Description	Values
General Typ	Duplex LC patch cord
Operation temperature (in Work)	-45 up to 85
Polarity	A-B / B-A straight polarity (standard)
RoHS compliant 2001/65/EU	Yes
REACH compliant	Yes

Connector left

Description	Values
Connector typ	LC-XD duplex Uniboot
Polish	APC
Color Housing	Black
Color Clip	Green
Color Boot	Black / Black
Design connector acc. To	IEC 61754-20, TIA 604-10-A
Performance class H+S	S
Return Loss	>85 dB
Durability	1000
Tensile load	70 N
Tensile load acc. To GR-326-COR	Fullfilled

Connector right


Description	Values
Connector typ	LC-XD duplex Uniboot
Polish	APC
Color Housing	Black
Color Clip	Green
Design connector acc. To	IEC 61754-20, TIA 604-10-A
Performance class H+S	1S
Return Loss	>85
Durability	1000
Tensile load	70 N
Tensile load acc. To GR-326-COR	Fullfilled

Cable

Description	Values
Cable typ	Riser Cable

PCRS_LCAX_LCAX_A221T_XX.X_SS

Fiber count	2
Fiber	2 x 0.6mm
Fiber typ	E9/125-SM G.657.A2
Outer diameter	2.1 mm
Outer jacket material	Jacket material according to UL 94V-0
Outer jacket color	Yellow

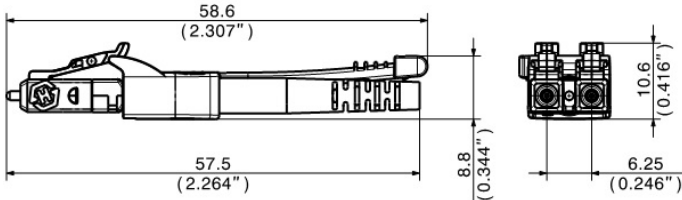

Ordering information

Attenuation (m)	Item number	Description
1.0	85020987	PCRS_LCAX_LCAX_A221T_01.0_S
2.0	85020988	PCRS_LCAX_LCAX_A221T_02.0_S
3.0	85020989	PCRS_LCAX_LCAX_A221T_03.0_SS
3.5	85020990	PCRS_LCAX_LCAX_A221T_03.5_S
5.0	85020991	PCRS_LCAX_LCAX_A221T_05.0_SS
6.0	85020992	PCRS_LCAX_LCAX_A221T_06.0_S
7.0	85020993	PCRS_LCAX_LCAX_A221T_07.0_S
10.0	85020994	PCRS_LCAX_LCAX_A221T_10.0_SS
15.0	85020995	PCRS_LCAX_LCAX_A221T_15.0_S
20.0	85020996	PCRS_LCAX_LCAX_A221T_20.0_S

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Huber & Suhner](#) manufacturer:

Other Similar products are found below :

[3402.17.A](#) [31 MMBX-SMA-50-1/111 NE](#) [74Z-0-23-17](#) [65 SMA-50-0-1/111 NE](#) [32 MMBX-50-0-6 / 111 NE](#) [Mini141 K-16](#) [7404.17.0003](#)
[33_N-SMA-50-51/1--_UE](#) [76_Z-0-2-1](#) [Minibend L-13](#) [Microbend MTR-11](#) [16_N-50-3-103/133_NE](#) [Microbend R-4.5](#) [74_Z-0-0-53](#)
[85_SMC-50-0-1/133_NE](#) [31_PC35-50-0-2/199_NE](#) [65_BNC-50-0-2/133_NE](#) [1399.17.0125](#) [76_Z-0-4-1](#) [80346275](#) [11_C-50-7-6/133_NE](#)
[6620_SMA-50-2/199_NE](#) [Minibend R-5.5](#) [11_SMB-50-2-41/111_NE](#) [Mini141 K-8](#) [74_Z-0-0-246](#) [22_BNC-50-0-5/133_NE](#) [6500_N-50-](#)
[1/199_NE](#) [6560.17.AA](#) [3401.17.0033](#) [11_N-50-2-1/133_NE](#) [3401.00.0022](#) [74_Z-0-0-142](#) [11_QLA-01-2-8/122_NE](#) [34_BNC-50-0-6/100_NE](#)
[74_Z-0-0-59](#) [Minibend R-6.5](#) [21_N-75-4-8/133_NE](#) [24_BNC-75-2-1/133_NE](#) [24_H4-50-3-1/133_NE](#) [Minibend-14](#) [31_SHV-50-0-1/133_NE](#)
[23_SK-50-0-52/199_NE](#) [74_Z-0-0-214](#) [23_BNC-50-0-2/133_NE](#) [74_Z-0-0-60](#) [33_SK-PC24-50-1/199_NE](#) [24_N-50-7-8/133_NE](#) [74_Z-0-0-](#)
[157](#) [6810_N-50-1/1--_NE](#)