


## YE04709

**Networking Cables**  
**Datatwist® patch cable**  
**Patch Cat 6 U/UTP LSNH**  
2017-09-18 C1

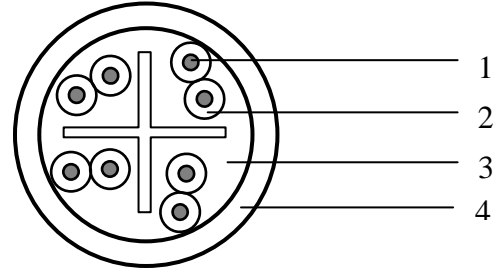

### Applications

- Horizontal and building backbone cable
- Support current and future Category 6 and 5e applications, such as:  
1000Base-T (Gigabit Ethernet), 100 Base-T, 10 Base-T, FDDI, ATM

### General standards

- International standard: ISO/IEC 11801 2nd edition (2002) and ISO/IEC 11801 Amendment 2 (2010)
- European standard: EN 50173-1 (2002) and EN 50173-1 Amendment 1 (2009)
- U.S. Standards: ANSI/TIA/EIA 568-B.2-1 (2002)

### Construction & Dimensions

<b>1. Conductor</b>	
Material	Stranded bare copper ETP
Diameter	AWG 24/7
<b>2. Insulation</b>	
Material	Polyethylene
Nominal diameter over insulation	1.0 mm
<b>3. Cable core</b>	
Pair	2 twisted insulated conductors
Cross Web	Polyethylene
Number of pairs	4, all twisted together
Colour code pair 1	White / Blue & Blue
Colour code pair 2	White / Orange & Orange
Colour code pair 3	White / Green & Green
Colour code pair 4	White / Brown & Brown
<b>4. Jacket</b>	
Material	LSNH
Diameter	5.7 ± 0.2 mm

## Electrical characteristics

Reference standard: ISO/IEC 61156-6 edition 2.0 (2009)

Low frequency and D.C. (at 20°C)	Specification	Unit
D.C. resistance conductor	< 9,5	Ω/100m
Resistance unbalance: within a pair / between pairs	< 2 / < 4	%
Insulation resistance	≥ 5000	MΩ.km
Dielectric strength conductor-conductor (2 sec.)	2.5	kV DC
Mutual capacitance	< 56	nF/km
Capacitance unbalance pair to ground	< 1600	pF/km
Nominal velocity of propagation (for information only)	0.70	c
Delay skew (differential delay)	≤ 40	ns/100m
Coupling attenuation according IEC 61156-5	Type III	

High frequency (at 20°), reference standard: ISO/IEC61156-6												
TYPE	1*	4	10	16	20	31.2	62.5	100	155	200	250	MHz
Attenuation <sup>*)</sup>	2.5	4.6	7.2	9.1	10.2	12.9	18.6	23.9	30.4	35.0	39.6	dB/100m
NEXT	75.3	66.3	60.3	57.2	55.8	52.9	48.4	45.3	42.4	40.8	39.3	dB/100m
PS NEXT	72.3	63.3	57.3	54.2	52.8	49.9	45.4	42.3	39.4	37.8	36.3	dB/100m
ACR	73.2	62.4	54.3	49.6	47.3	42.1	32.9	25.4	17.1	11.6	6.3	dB/100m
PS ACR	70.2	59.4	51.3	46.6	44.3	39.1	29.9	22.4	14.1	8.6	3.3	dB/100m
ACR-F	70.0	58.0	50.0	45.9	44.0	40.1	34.1	30.0	26.2	24.0	22.0	dB/100m
PS ACR-F	67.0	55.0	47.0	42.9	41.0	37.1	31.1	27.0	23.2	21.0	19.0	dB/100m
Return Loss	20.0	23.0	25.0	25.0	25.0	23.6	21.5	20.1	18.8	18.0	17.3	dB/100m
TCL level 1	40.0	34.0	30.0	28.0	27.0	25.1	22.0	20.0	18.1	17.0	16.0	dB/100m
EL TCTL	35.0	23.0	15.0	10.9	9.0	5.1						dB/100m
Impedance upper limit	122.2	115.2	111.9	111.9	111.9	114.1	118.3	121.9	126.0	128.8	131.5	Ω
Impedance lower limit	81.8	86.8	89.4	89.4	89.4	87.7	84.5	82.0	79.3	77.6	76.0	Ω
Propagation delay	570	552	545	543	540	539	538	537	537	537	536	dB/100m

\*): attenuation is 120% from horizontal cable requirement

: Limits below 4MHz are for information only

## Mechanical characteristics

	Specification	Unit
Elongation at break of the conductors	10	%
Minimum elongation at break of the insulation	≥ 100	%
Minimum elongation at break of the sheath	≥ 100	%
Tensile strength of sheath	> 9	MPa

## Environmental and overall characteristics

	Specification	Unit
Maximum operating voltage (for all temperatures cable is intended to be used)	72	V D.C.
Maximum continuous current per conductor (@25°C)	1.5	A
Temperature rating installation	0 / 50	°C
Temperature rating operation	- 30 / 60	°C
Total cable weight	37	kg/km
Minimum bending radius (during operation and installation)	23 / 46	mm
Maximum pulling strength	80	N
Burning load	455	kJ/m
Smoke density acc. to IEC 61034-1/2 & EN50268-1/2; transmittance	> 60	%
Amount of halogen acid gas acc. to IEC 60754-1/2 & EN50267-1/2; pH	> 4.3	
Amount of halogen acid gas acc. to IEC 60754-1/2 & EN50267-1/2; Conductivity	< 10	µS/mm
Reaction to fire according IEC 60332-1	Pass	



Belden declares this product to be in compliance with the environmental regulations EU RoHS (Directive 2002/95/EC, 27 January 2003); this is valid for all material produced after the RoHS compliant date for this product.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Belden](#) manufacturer:*

Other Similar products are found below :

[HIPWP2LA](#) [AX270172](#) [8916-BRN-100](#) [8916-GRN/YEL-500](#) [8916-YEL-500](#) [8917 002100](#) [8917-005-500](#) [8917-GRN/YEL-100](#) [8918-GRY-1000](#) [8919-BRN-1000](#) [8919-DK-BLU-100](#) [8920-BRN-1000](#) [8920-GRY-1000](#) [8920-RED-1000](#) [7805R-GRY-100](#) [7810A-BLK-500](#) [8104-CHR-500](#) [8108-CHR-100](#) [8125-CHR-100](#) [8132-CHR-1000](#) [8133-CHR-1000](#) [8155-CHR-1000](#) [8162-CHR-1000](#) [8164-CHR-100](#) [8164-CHR-1000](#) [8185-CHR-100](#) [8205-CHR-1000](#) [8218-BLK-1000](#) [8221-BLK-1000](#) [8233-BLK-1000](#) [8237-BLK-500](#) [8238-BLK-500](#) [8240-BLK-U1000](#) [8241A-BLK-1000](#) [8262-BLK-1000](#) [8263-BLK-U1000](#) [8268-BLK-500](#) [8279-BLK-1000](#) [83002 0041000](#) [83002 0101000](#) [83003-VIO-100](#) [83003-VIO-500](#) [83004 0051000](#) [83006 0041000](#) [83007 0081000](#) [83008-WHT-1000](#) [83010-BRN-100](#) [83010-DK-GRN-1000](#) [83023-BRN-100](#) [83023-DK-GRN-100](#)