


MCM	FILE NO.	27-435	REV.	DESCRIPTION	DRAWN / DATE	APPROVED / DATE
			0	INITIAL RELEASE	YANG 10/14/2014	LISA 10/14/2014

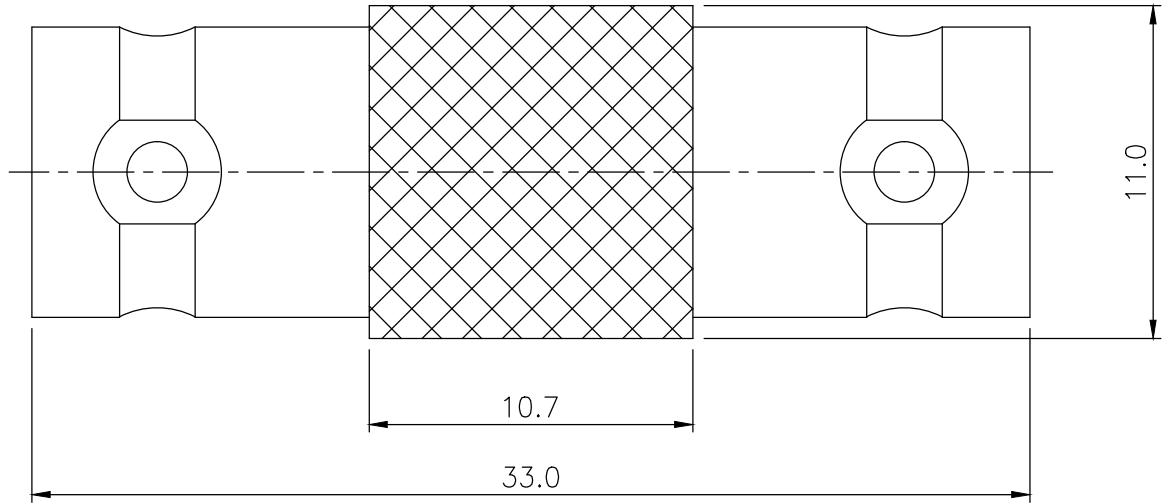

SPECIFICATION:

1. Insulator Resistance: 5000MΩ Min. at DC 500V one minute
2. Contact Resistance: 4.3mΩ Max. at DC 0.2V, 1A
3. Dielectric withstanding voltage: 1500Vrms Min. at DC one minute
4. Test Temperature: 25±5°C

3	INSULATOR	POM	
2	CONTACT PIN	BRASS, GOLD-PLATED	
1	BODY	BRASS, NICKEL-PLATED	

www.mcmelectronics.com

DIMENSIONS ARE IN mm [INCH]		TOLERANCES ARE FRACTIONS DECIMALS ANGLES		MATERIAL		P/N		DRAWN YANG		DATE 10/14/2014	
MOLD NO.		0.5~6 ± 0.20 [0.008]		FINISH		PROJECT NO.					
		6~30 ± 0.40 [0.016]		COLOR		SCALE 4:1		SIZE A4		SHEET 1 OF 1	
		30~120 ± 0.60 [0.024]								MC068	

BNC-Female to Female
50ohm Adapter

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [MCM manufacturer](#):

Other Similar products are found below :

[NWTBATCAPMB13](#) [25-020](#) [27-505](#) [27-4155](#) [27-840](#) [28-0755](#) [28-5958](#) [50-10820](#) [37-330](#) [PI-UPTIMEUPS](#) [27-5918](#) [27-5977](#) [12-3410](#) [28-6023](#) [55-3230](#) [35SPS-3](#) [28-6008](#) [22-26180](#) [17705](#) [55-5675](#) [27-6020](#) [24-12352](#) [21-7655](#) [28-6017](#) [53-1230](#) [28-5965](#) [21-18966](#) [22-1640](#) [27-4200](#) [83-17607](#) [27-5833](#) [27-5925](#) [24-12344](#) [12-3404](#) [PCM-2100-50](#) [21-19004](#) [28-6080](#) [22-665](#) [24-1040](#) [27-5917](#) [28-6005](#) [55-5670](#)
[HD15MM35N-100F](#) [21-4605](#) [21-12825](#) [24-5360](#) [27-4270](#) [27-5940](#) [27-5949](#) [27-6112](#)