



# Chip Beads

For signal line

## MMZ series

---

|                |                          |
|----------------|--------------------------|
| <b>MMZ0402</b> | <b>0402[01005 inch]*</b> |
| <b>MMZ0603</b> | <b>0603[0201 inch]</b>   |
| <b>MMZ1005</b> | <b>1005[0402 inch]</b>   |
| <b>MMZ1608</b> | <b>1608[0603 inch]</b>   |
| <b>MMZ2012</b> | <b>2012[0805 inch]</b>   |

\* Dimensions Code JIS[EIA]

---

## REMINDERS FOR USING THESE PRODUCTS

Before using these products, be sure to request the delivery specifications.

### SAFETY REMINDERS

Please pay sufficient attention to the warnings for safe designing when using these products.

#### REMINDERS

- The storage period is less than 12 months. Be sure to follow the storage conditions (Temperature: 5 to 40°C, Humidity: 10 to 75% RH or less).  
If the storage period elapses, the soldering of the terminal electrodes may deteriorate.
- Do not use or store in locations where there are conditions such as gas corrosion (salt, acid, alkali, etc.).
- Before soldering, be sure to preheat components.  
The preheating temperature should be set so that the temperature difference between the solder temperature and chip temperature does not exceed 150°C.
- Soldering corrections after mounting should be within the range of the conditions determined in the specifications.  
If overheated, a short circuit, performance deterioration, or lifespan shortening may occur.
- When embedding a printed circuit board where a chip is mounted to a set, be sure that residual stress is not given to the chip due to the overall distortion of the printed circuit board and partial distortion such as at screw tightening portions.
- Self heating (temperature increase) occurs when the power is turned ON, so the tolerance should be sufficient for the set thermal design.
- Carefully lay out the coil for the circuit board design of the non-magnetic shield type.  
A malfunction may occur due to magnetic interference.
- Use a wrist band to discharge static electricity in your body through the grounding wire.
- Do not expose the products to magnets or magnetic fields.
- Do not use for a purpose outside of the contents regulated in the delivery specifications.
- The products listed on this catalog are intended for use in general electronic equipment (AV equipment, telecommunications equipment, home appliances, amusement equipment, computer equipment, personal equipment, office equipment, measurement equipment, industrial robots) under a normal operation and use condition.  
The products are not designed or warranted to meet the requirements of the applications listed below, whose performance and/or quality require a more stringent level of safety or reliability, or whose failure, malfunction or trouble could cause serious damage to society, person or property.  
If you intend to use the products in the applications listed below or if you have special requirements exceeding the range or conditions set forth in the each catalog, please contact us.

- (1) Aerospace/Aviation equipment
- (2) Transportation equipment (cars, electric trains, ships, etc.)
- (3) Medical equipment
- (4) Power-generation control equipment
- (5) Atomic energy-related equipment
- (6) Seabed equipment
- (7) Transportation control equipment

- (8) Public information-processing equipment
- (9) Military equipment
- (10) Electric heating apparatus, burning equipment
- (11) Disaster prevention/crime prevention equipment
- (12) Safety equipment
- (13) Other applications that are not considered general-purpose applications

When designing your equipment even for general-purpose applications, you are kindly requested to take into consideration securing protection circuit/device or providing backup circuits in your equipment.

# Chip Beads

For signal line

Product compatible with RoHS directive

Halogen-free

Compatible with lead-free solders

## Overview of the MMZ Series

### FEATURES

- Noise reduction solution for general signal lines.
- Lineup includes 5 sizes from 0402 to 2012.
- Achieves various frequency characteristics by using 8 materials with different features.
- Multilayer integration monolithic structure makes it highly reliable.
- There is no directivity.

### APPLICATION

- Smart phones, tablets, portable memory audio devices, various modules, PCs, note PCs, TVs, STBs, Blu-ray recorders, DSCs, and DVCs
- Signal line noise removal for game machines, smart grids, industrial equipment, etc.

### PART NUMBER CONSTRUCTION

| Series name | LxWxT Dimensions (mm) |               | Material name | Impedance (Ω) at 100MHz |     | Characteristic type | Packaging style |        | Internal code |
|-------------|-----------------------|---------------|---------------|-------------------------|-----|---------------------|-----------------|--------|---------------|
| MMZ         | 0402                  | 0.4x0.2x0.2   | A             | 121                     | 120 | C                   | T               | Taping | □□□           |
|             | 0603                  | 0.6x0.3x0.3   | B             |                         |     | A                   |                 |        |               |
|             | 1005                  | 1.0x0.5x0.5   | D             |                         |     | B                   |                 |        |               |
|             | 1608                  | 1.6x0.8x0.6   | F             |                         |     | H                   |                 |        |               |
|             |                       | 1.6x0.8x0.8   | Q             |                         |     |                     |                 |        |               |
|             | 2012                  | 2.0x1.25x0.85 | R             |                         |     |                     |                 |        |               |
|             |                       |               | S             |                         |     |                     |                 |        |               |
|             |                       |               | Y             |                         |     |                     |                 |        |               |

### OPERATING TEMPERATURE RANGE, PACKAGE QUANTITY, PRODUCT WEIGHT

| Type    | Temperature range      |                       | Package quantity | Individual weight |
|---------|------------------------|-----------------------|------------------|-------------------|
|         | Operating temperature* | Storage temperature** |                  |                   |
|         | (°C)                   | (°C)                  | (pieces/reel)    | (mg)              |
| MMZ0402 | -55 to +125            | -55 to +125           | 20,000           | 0.08              |
| MMZ0603 | -55 to +125            | -55 to +125           | 15,000           | 0.3               |
| MMZ1005 | -55 to +125            | -55 to +125           | 10,000           | 1                 |
| MMZ1608 | t=0.6mm                | -55 to +125           | 4,000            | 3                 |
|         | t=0.8mm                | -55 to +125           | 4,000            | 4                 |
| MMZ2012 | -55 to +125            | -55 to +125           | 4,000            | 8                 |

\* Operating temperature range includes self-temperature rise.

\*\* The Storage temperature range is for after the circuit board is mounted.

○ RoHS Directive Compliant Product: See the following for more details related to RoHS Directive compliant products. <http://www.tdk.co.jp/rohs/>

○ Halogen-free: Indicates that Cl content is less than 900ppm, Br content is less than 900ppm, and that the total Cl and Br content is less than 1500ppm.

• All specifications are subject to change without notice.

# Overview of the MMZ Series

## RECOMMENDED REFLOW PROFILE



| Preheating |       |            | Soldering |           | Peak         |      |
|------------|-------|------------|-----------|-----------|--------------|------|
| Temp.      | Temp. | Time       | Temp.     | Time      | Temp.        | Time |
| T1         | T2    | t1         | T3        | t2        | T4           | t3   |
| 150°C      | 180°C | 60 to 120s | 230°C     | 30 to 60s | 250 to 260°C | 10s  |

# Overview of the MMZ Series

## MATERIAL CHARACTERISTICS


- B material:** This type is perfectly suited for fast digital signals. By equalizing R components and X components that beads possess at a frequency of 5MHz, it is able to suppress overshooting, undershooting and ringing of fast digital signals.
- R material:** For wide frequency applications calling for broad impedance characteristics. For digital signal line applications calling requiring good waveform integrity. Impedance values selected for effectiveness at 10 to 200MHz.
- S material:** Standard type that features impedance characteristics similar to those of a typical ferrite core. For signal line applications in which the blocking region is near 100MHz. Impedance values selected for effectiveness at 40 to 300MHz.
- Y material:** High frequency range type intended for the 100MHz region and above.  
For signal line applications in which the signal frequency is far from the cutoff frequency. Impedance values selected for effectiveness at 80 to 400MHz.
- A material:** This high-impedance product is based on the impedance frequency characteristics of our Y-material. The product offers excellent impedance characteristics, which is greater than 2500Ω, in the vicinity of 100MHz range (MMZ1608A252B).
- Q material:** For high-band applications designed for 100MHz and above. Impedance values selected for effectiveness at 100 to 800MHz.
- D material:** For applications calling for low insertion loss at low frequencies and sharply increasing impedance at high frequencies. Designed for high impedance at high frequencies (300MHz to 1GHz) for signal line applications.
- F material:** This new product inherits the characteristic of our D-material, namely its sharp impedance rise time, and its impedance peak frequency has been shifted higher into range. The product offers excellent noise suppression from 600MHz to as high as in the GHz range.

## TYPICAL MATERIAL IMPEDANCE CHARACTERISTICS

MMZ0402 Type




MMZ1608 Type

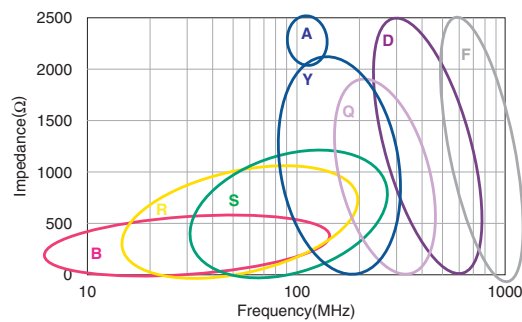


MMZ0603 Type



MMZ2012 Type

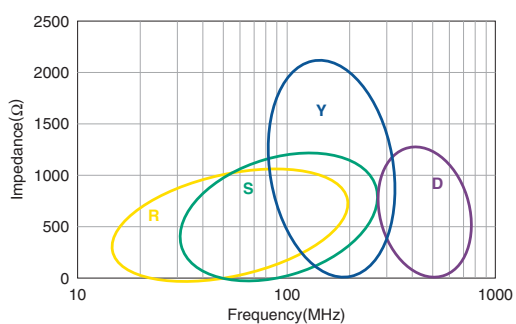

MMZ1005 Type

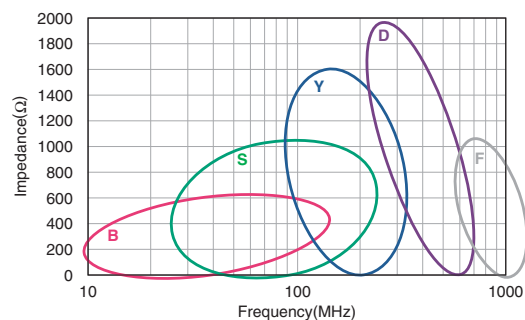


• All specifications are subject to change without notice.

MMZ series

# MMZ0402 Type




## ■ SHAPE & DIMENSIONS

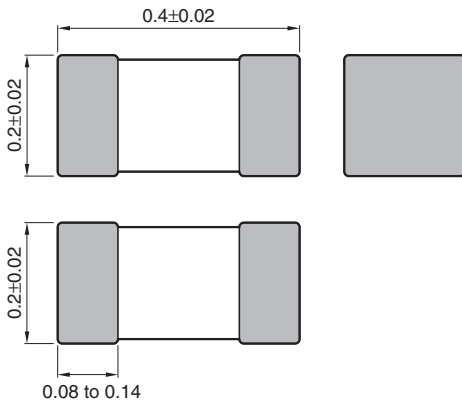

Dimensions in mm

## ■ RECOMMENDED LAND PATTERN

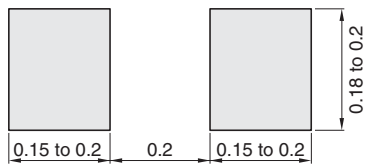

Dimensions in mm

# MMZ series **MMZ0402 Type**

## ■ ELECTRICAL CHARACTERISTICS

### □ CHARACTERISTICS SPECIFICATION TABLE

| Impedance<br>[100MHz]<br>( $\Omega$ ) | Tolerance     | DC resistance<br>( $\Omega$ )max. | Rated current<br>(mA)max. | Part No.         |
|---------------------------------------|---------------|-----------------------------------|---------------------------|------------------|
| 10                                    | $\pm 5\Omega$ | 0.07                              | 750                       | MMZ0402S100CT□□□ |
| 70                                    | $\pm 25\%$    | 0.36                              | 300                       | MMZ0402S700CT□□□ |
| 120                                   | $\pm 25\%$    | 0.70                              | 210                       | MMZ0402S121CT□□□ |
| 150                                   | $\pm 25\%$    | 0.70                              | 200                       | MMZ0402S151CT□□□ |

### ○ Measurement equipment

| Measurement item | Product No.   | Manufacturer         |
|------------------|---------------|----------------------|
| Impedance        | E4991A+16196D | Agilent Technologies |
| DC resistance    | Type-7556     | Yokogawa             |

\* Equivalent measurement equipment may be used.

# MMZ series **MMZ0402 Type**

## ■ ELECTRICAL CHARACTERISTICS

### □ Z VS. FREQUENCY CHARACTERISTICS (BY SERIES)

#### MMZ0402S SERIES



• All specifications are subject to change without notice.




# MMZ series **MMZ0402 Type**


## ■ ELECTRICAL CHARACTERISTICS

### □ Z, X, R VS. FREQUENCY CHARACTERISTICS

**MMZ0402S100C**

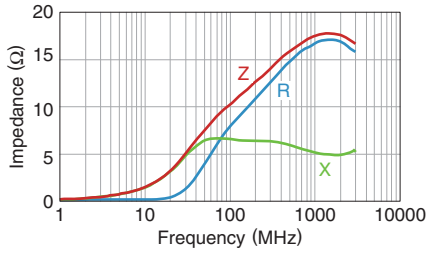


**MMZ0402S700C**

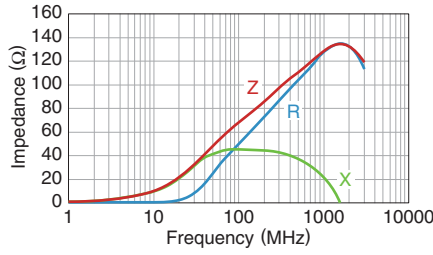

**MMZ0402S121C**



**MMZ0402S151C**

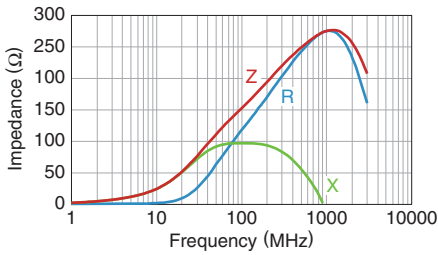

• All specifications are subject to change without notice.

MMZ series

# MMZ0603 Type



## SHAPE & DIMENSIONS



Dimensions in mm

## RECOMMENDED LAND PATTERN



Dimensions in mm

• All specifications are subject to change without notice.

# MMZ series MMZ0603 Type

## ELECTRICAL CHARACTERISTICS

### CHARACTERISTICS SPECIFICATION TABLE

| Impedance<br>[100MHz]<br>( $\Omega$ ) | Tolerance     | DC resistance<br>( $\Omega$ )max. | Rated current<br>(mA)max. | Part No.         |
|---------------------------------------|---------------|-----------------------------------|---------------------------|------------------|
|                                       |               |                                   |                           |                  |
| 10                                    | $\pm 5\Omega$ | 0.09                              | 500                       | MMZ0603S100CT□□□ |
| 80                                    | $\pm 25\%$    | 0.30                              | 200                       | MMZ0603S800CT□□□ |
| 120                                   | $\pm 25\%$    | 0.45                              | 200                       | MMZ0603S121CT□□□ |
| 240                                   | $\pm 25\%$    | 0.57                              | 200                       | MMZ0603S241CT□□□ |
| 470                                   | $\pm 25\%$    | 1.30                              | 100                       | MMZ0603S471CT□□□ |
| 600                                   | $\pm 25\%$    | 1.45                              | 100                       | MMZ0603S601CT□□□ |
| 1000                                  | $\pm 25\%$    | 1.25                              | 200                       | MMZ0603S102HT□□□ |
| 75                                    | $\pm 25\%$    | 0.35                              | 300                       | MMZ0603Y750CT□□□ |
| 120                                   | $\pm 25\%$    | 0.39                              | 200                       | MMZ0603Y121CT□□□ |
| 240                                   | $\pm 25\%$    | 0.80                              | 200                       | MMZ0603Y241CT□□□ |
| 470                                   | $\pm 25\%$    | 1.40                              | 200                       | MMZ0603Y471CT□□□ |
| 600                                   | $\pm 25\%$    | 1.50                              | 200                       | MMZ0603Y601CT□□□ |
| 33                                    | $\pm 25\%$    | 0.70                              | 200                       | MMZ0603D330CT□□□ |
| 47                                    | $\pm 25\%$    | 0.70                              | 200                       | MMZ0603D470CT□□□ |
| 56                                    | $\pm 25\%$    | 0.95                              | 100                       | MMZ0603D560CT□□□ |
| 80                                    | $\pm 25\%$    | 1.25                              | 100                       | MMZ0603D800CT□□□ |
| 10                                    | $\pm 5\Omega$ | 0.50                              | 200                       | MMZ0603F100CT□□□ |
| 22                                    | $\pm 25\%$    | 1.00                              | 200                       | MMZ0603F220CT□□□ |
| 33                                    | $\pm 25\%$    | 1.30                              | 150                       | MMZ0603F330CT□□□ |

#### ○ Measurement equipment

| Measurement item | Product No.  | Manufacturer         |
|------------------|--------------|----------------------|
| Impedance        | E4991A+16197 | Agilent Technologies |
| DC resistance    | Type-7556    | Yokogawa             |


\* Equivalent measurement equipment may be used.

# MMZ series **MMZ0603 Type**


## ■ ELECTRICAL CHARACTERISTICS

### □ Z VS. FREQUENCY CHARACTERISTICS (BY SERIES)


**MMZ0603S SERIES**

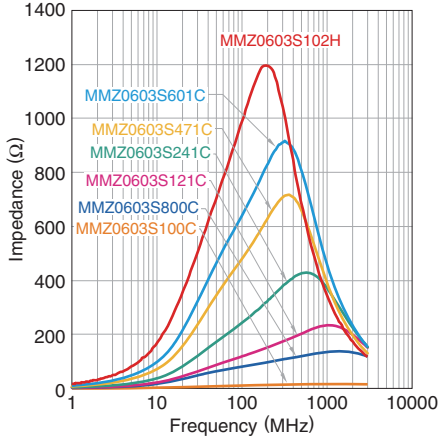


**MMZ0603Y SERIES**

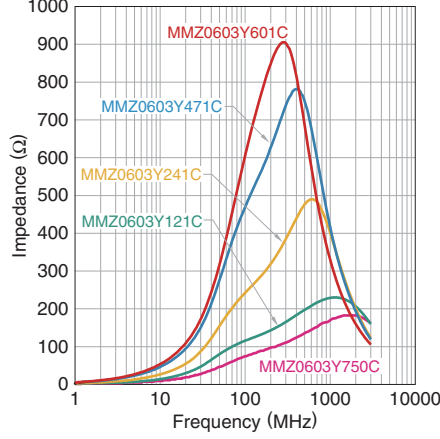

**MMZ0603D SERIES**

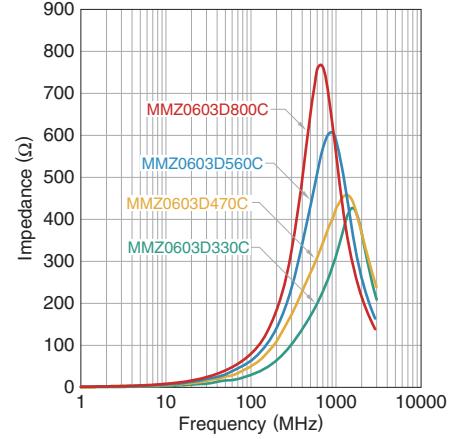

**MMZ0603F SERIES**

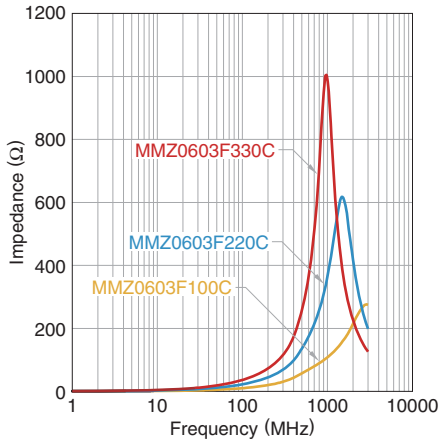


• All specifications are subject to change without notice.

# MMZ series MMZ0603 Type


## ELECTRICAL CHARACTERISTICS

### Z, X, R VS. FREQUENCY CHARACTERISTICS


MMZ0603S100C

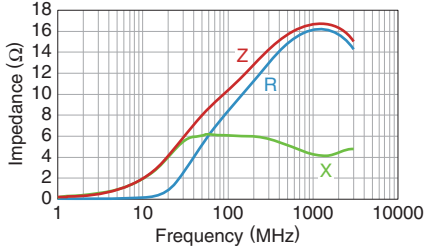

MMZ0603S800C

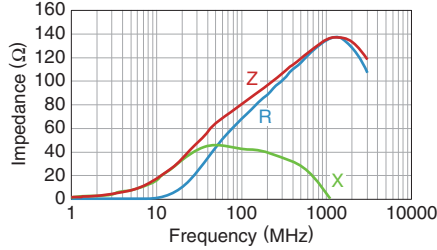

MMZ0603S121C

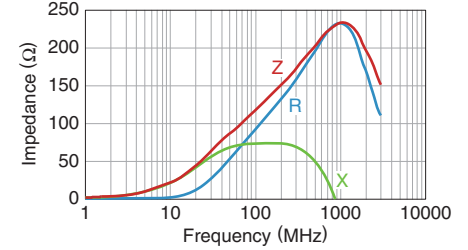


MMZ0603S241C




MMZ0603S471C




MMZ0603S601C

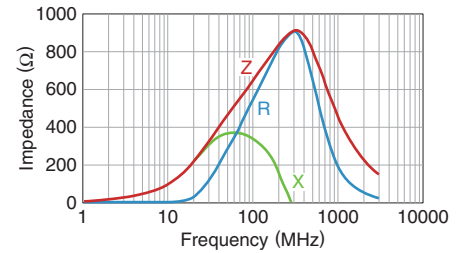


MMZ0603Y121C

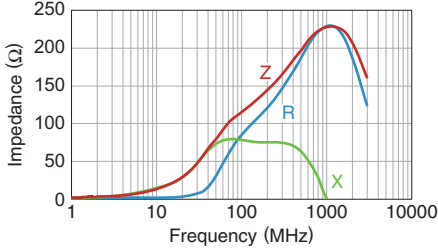


MMZ0603Y241C

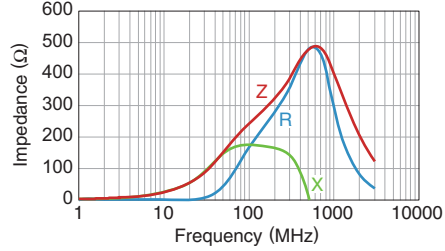


MMZ0603Y471C

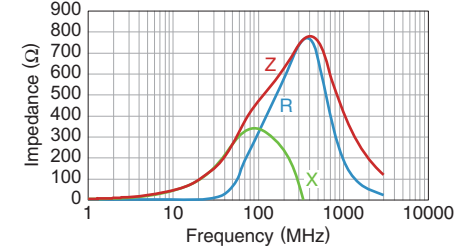


MMZ0603Y601C

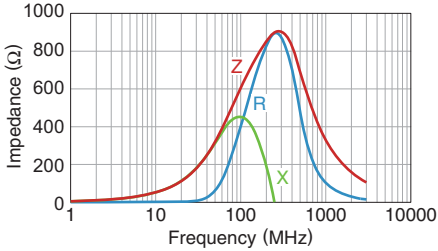


MMZ0603D330C

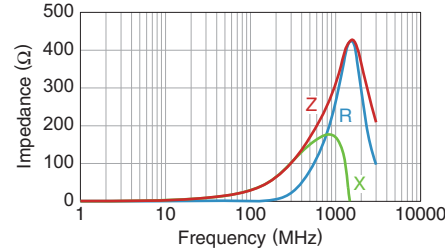


MMZ0603D560C

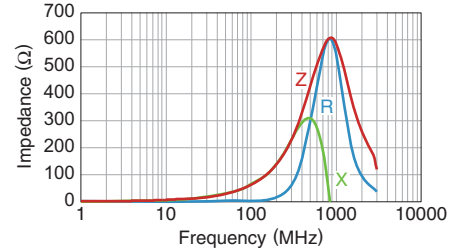


MMZ0603D800C

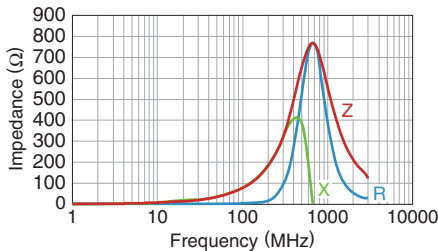

MMZ0603F100C

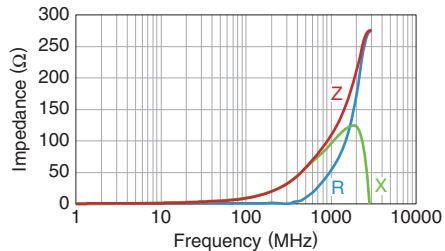

MMZ0603F220C

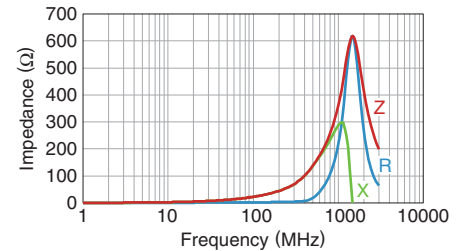


• All specifications are subject to change without notice.

# MMZ series **MMZ0603 Type**

## ■ ELECTRICAL CHARACTERISTICS

### □ Z, X, R VS. FREQUENCY CHARACTERISTICS

MMZ0603F330C

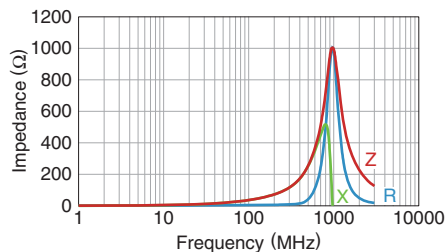


• All specifications are subject to change without notice.

MMZ series

# MMZ1005 Type




## SHAPE & DIMENSIONS

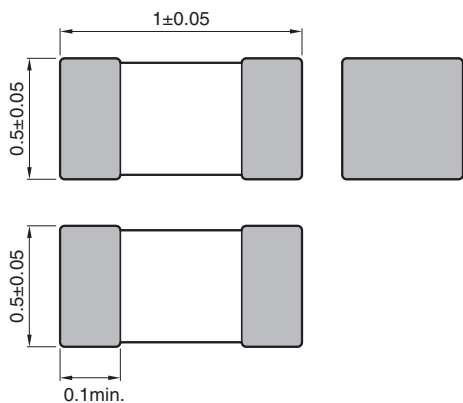

Dimensions in mm

## RECOMMENDED LAND PATTERN

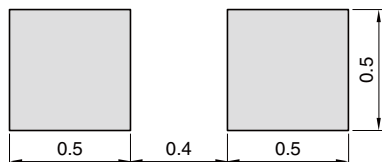

Dimensions in mm

• All specifications are subject to change without notice.

MMZ series **MMZ1005 Type**

## ■ ELECTRICAL CHARACTERISTICS

## □ CHARACTERISTICS SPECIFICATION TABLE

| Impedance<br>[100MHz]<br>(Ω) | Tolerance | DC resistance<br>(Ω)max. | Rated current<br>(mA)max. | Part No.         |
|------------------------------|-----------|--------------------------|---------------------------|------------------|
|                              |           |                          |                           |                  |
| 80                           | ±25%      | 0.19                     | 450                       | MMZ1005B800CT□□□ |
| 120                          | ±25%      | 0.25                     | 400                       | MMZ1005B121CT□□□ |
| 600                          | ±25%      | 0.85                     | 200                       | MMZ1005B601CT□□□ |
| 80                           | ±25%      | 0.12                     | 500                       | MMZ1005S800CT□□□ |
| 120                          | ±25%      | 0.22                     | 500                       | MMZ1005S121CT□□□ |
| 240                          | ±25%      | 0.28                     | 400                       | MMZ1005S241CT□□□ |
| 600                          | ±25%      | 0.52                     | 300                       | MMZ1005S601CT□□□ |
| 1000                         | ±25%      | 0.75                     | 200                       | MMZ1005S102CT□□□ |
| 40                           | ±25%      | 0.10                     | 550                       | MMZ1005Y400CT□□□ |
| 80                           | ±25%      | 0.17                     | 450                       | MMZ1005Y800CT□□□ |
| 120                          | ±25%      | 0.18                     | 400                       | MMZ1005Y121CT□□□ |
| 240                          | ±25%      | 0.26                     | 300                       | MMZ1005Y241CT□□□ |
| 300                          | ±25%      | 0.38                     | 250                       | MMZ1005Y301CT□□□ |
| 470                          | ±25%      | 0.47                     | 250                       | MMZ1005Y471CT□□□ |
| 600                          | ±25%      | 0.54                     | 250                       | MMZ1005Y601CT□□□ |
| 1000                         | ±25%      | 0.70                     | 200                       | MMZ1005Y102CT□□□ |
| 1500                         | ±25%      | 1.00                     | 100                       | MMZ1005Y152CT□□□ |
| 1800                         | ±25%      | 0.85                     | 150                       | MMZ1005Y182CT□□□ |
| 10                           | ±5Ω       | 0.10                     | 500                       | MMZ1005D100CT□□□ |
| 22                           | ±25%      | 0.17                     | 400                       | MMZ1005D220CT□□□ |
| 33                           | ±25%      | 0.24                     | 400                       | MMZ1005D330CT□□□ |
| 68                           | ±25%      | 0.38                     | 400                       | MMZ1005D680CT□□□ |
| 120                          | ±25%      | 0.60                     | 350                       | MMZ1005D121CT□□□ |
| 240                          | ±25%      | 0.90                     | 200                       | MMZ1005D241CT□□□ |
| 33                           | ±25%      | 0.50                     | 200                       | MMZ1005F330CT□□□ |
| 47                           | ±25%      | 0.60                     | 100                       | MMZ1005F470CT□□□ |
| 56                           | ±25%      | 0.70                     | 100                       | MMZ1005F560CT□□□ |

## ○ Measurement equipment

| Measurement item | Product No.   | Manufacturer         |
|------------------|---------------|----------------------|
| Impedance        | E4991A+16192A | Agilent Technologies |
| DC resistance    | Type-7556     | Yokogawa             |

\* Equivalent measurement equipment may be used.




# MMZ series **MMZ1005 Type**


## ■ ELECTRICAL CHARACTERISTICS

### □ Z VS. FREQUENCY CHARACTERISTICS (BY SERIES)


**MMZ1005B SERIES**

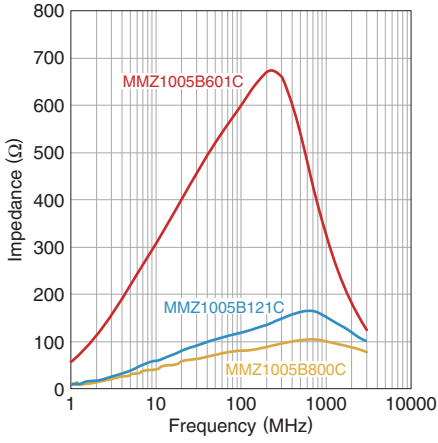


**MMZ1005S SERIES**

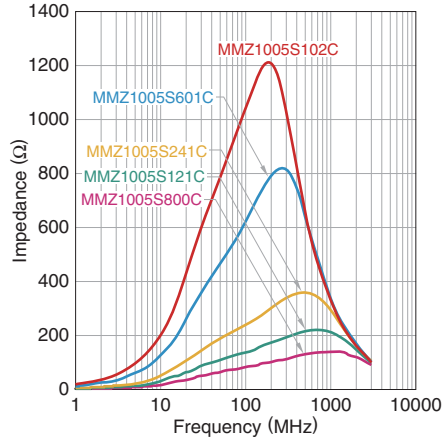


**MMZ1005Y SERIES**

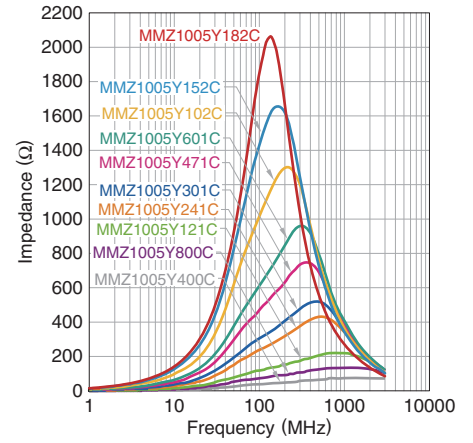

**MMZ1005D SERIES**

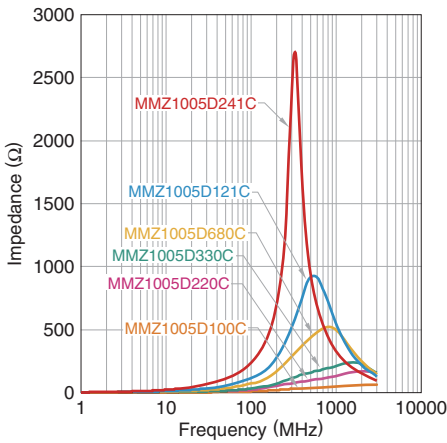

**MMZ1005F SERIES**

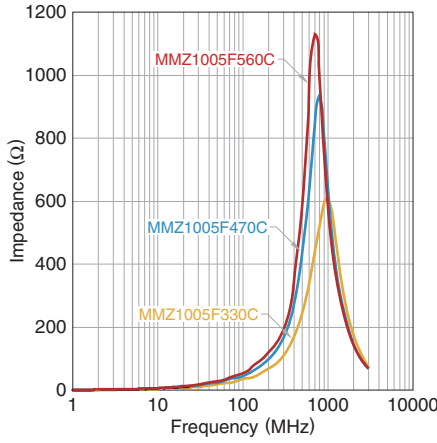

• All specifications are subject to change without notice.

# MMZ series MMZ1005 Type

## ELECTRICAL CHARACTERISTICS

### Z, X, R VS. FREQUENCY CHARACTERISTICS

MMZ1005B800C



MMZ1005B121C



MMZ1005B601C



MMZ1005S800C




MMZ1005S121C




MMZ1005S241C



MMZ1005S601C

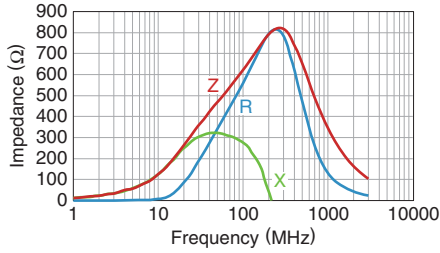

MMZ1005S102C

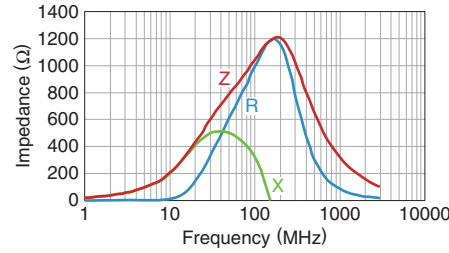

MMZ1005Y400C



MMZ1005Y800C




MMZ1005Y121C



MMZ1005Y241C




MMZ1005Y301C

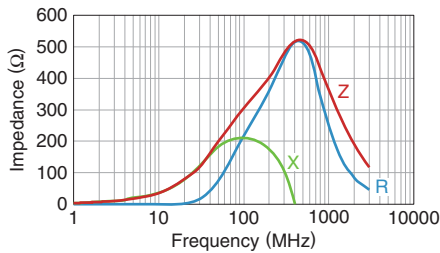

MMZ1005Y471C



MMZ1005Y601C

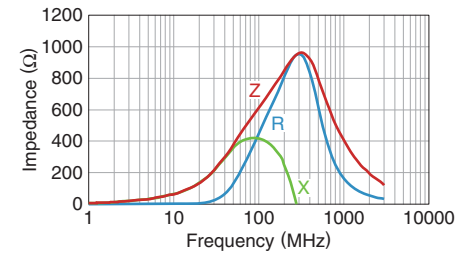

• All specifications are subject to change without notice.

# MMZ series MMZ1005 Type


## ELECTRICAL CHARACTERISTICS

### Z, X, R VS. FREQUENCY CHARACTERISTICS

MMZ1005Y102C




MMZ1005Y152C

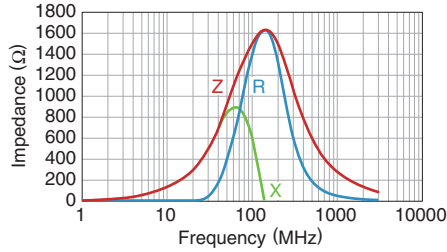


MMZ1005Y182C




MMZ1005D100C

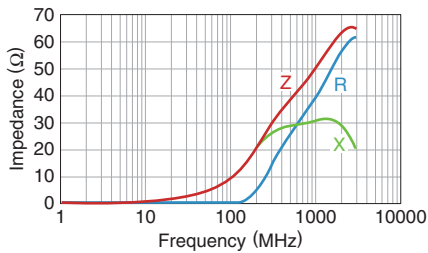


MMZ1005D220C

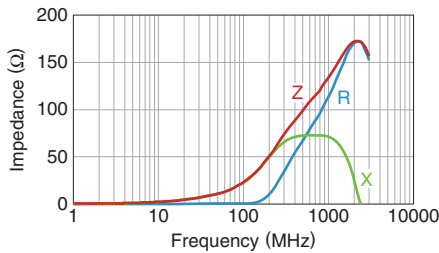


MMZ1005D330C

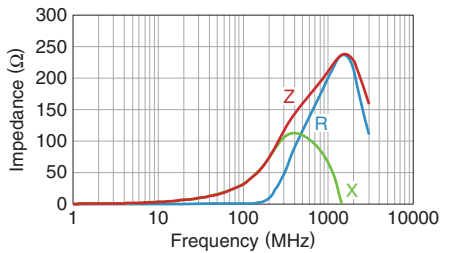

MMZ1005D680C

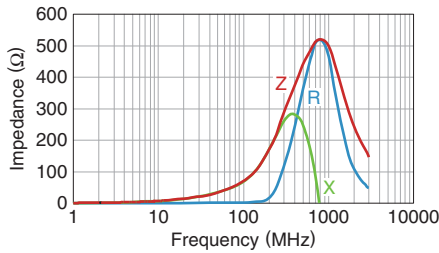


MMZ1005D121C

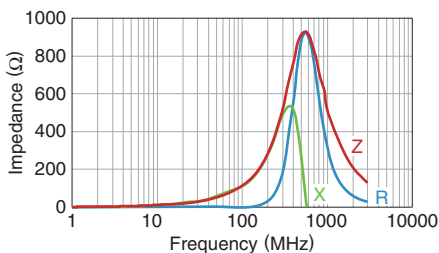


MMZ1005D241C




MMZ1005F330C

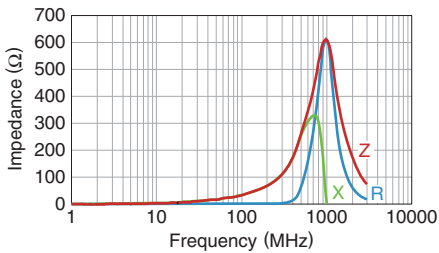

MMZ1005F470C

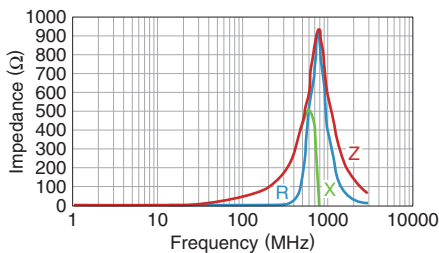

MMZ1005F560C

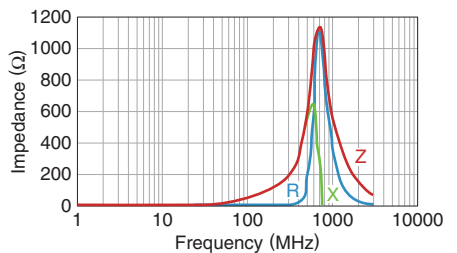


• All specifications are subject to change without notice.

MMZ series


# MMZ1608 Type



## SHAPE & DIMENSIONS

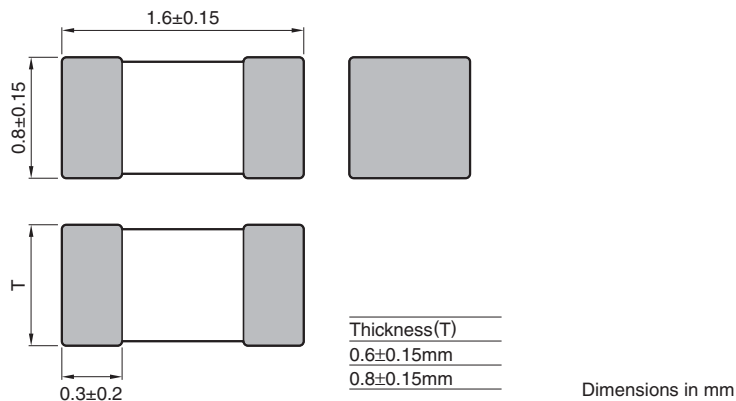

## RECOMMENDED LAND PATTERN

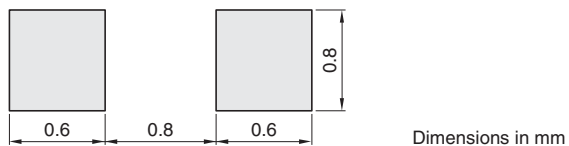

• All specifications are subject to change without notice.

# MMZ series MMZ1608 Type

## ELECTRICAL CHARACTERISTICS

### CHARACTERISTICS SPECIFICATION TABLE

| Impedance<br>[100MHz]<br>(Ω) | Tolerance | DC resistance<br>(Ω)max. | Rated current<br>(mA)max. | Thickness T<br>(mm) | Part No.         |
|------------------------------|-----------|--------------------------|---------------------------|---------------------|------------------|
|                              |           |                          |                           |                     |                  |
| 120                          | ±25%      | 0.15                     | 600                       | 0.6                 | MMZ1608B121CT□□□ |
| 220                          | ±25%      | 0.25                     | 500                       | 0.6                 | MMZ1608B221CT□□□ |
| 300                          | ±25%      | 0.25                     | 500                       | 0.6                 | MMZ1608B301CT□□□ |
| 470                          | ±25%      | 0.30                     | 500                       | 0.6                 | MMZ1608B471CT□□□ |
| 600                          | ±25%      | 0.40                     | 500                       | 0.6                 | MMZ1608B601CT□□□ |
| 1000                         | ±25%      | 0.60                     | 300                       | 0.8                 | MMZ1608B102CT□□□ |
| 15                           | ±25%      | 0.05                     | 1500                      | 0.8                 | MMZ1608R150AT□□□ |
| 30                           | ±25%      | 0.05                     | 1500                      | 0.8                 | MMZ1608R300AT□□□ |
| 60                           | ±25%      | 0.10                     | 800                       | 0.8                 | MMZ1608R600AT□□□ |
| 120                          | ±25%      | 0.18                     | 500                       | 0.8                 | MMZ1608R121AT□□□ |
| 300                          | ±25%      | 0.25                     | 500                       | 0.8                 | MMZ1608R301AT□□□ |
| 470                          | ±25%      | 0.30                     | 500                       | 0.8                 | MMZ1608R471AT□□□ |
| 600                          | ±25%      | 0.40                     | 500                       | 0.8                 | MMZ1608R601AT□□□ |
| 1000                         | ±25%      | 0.50                     | 400                       | 0.8                 | MMZ1608R102AT□□□ |
| 40                           | ±25%      | 0.10                     | 600                       | 0.8                 | MMZ1608S400AT□□□ |
| 80                           | ±25%      | 0.15                     | 500                       | 0.8                 | MMZ1608S800AT□□□ |
| 120                          | ±25%      | 0.15                     | 500                       | 0.8                 | MMZ1608S121AT□□□ |
| 180                          | ±25%      | 0.20                     | 500                       | 0.8                 | MMZ1608S181AT□□□ |
| 220                          | ±25%      | 0.20                     | 500                       | 0.8                 | MMZ1608S221AT□□□ |
| 300                          | ±25%      | 0.30                     | 500                       | 0.8                 | MMZ1608S301AT□□□ |
| 470                          | ±25%      | 0.30                     | 500                       | 0.8                 | MMZ1608S471AT□□□ |
| 600                          | ±25%      | 0.35                     | 500                       | 0.8                 | MMZ1608S601AT□□□ |
| 1000                         | ±25%      | 0.50                     | 400                       | 0.8                 | MMZ1608S102AT□□□ |
| 2000                         | ±25%      | 0.90                     | 200                       | 0.8                 | MMZ1608S202AT□□□ |
| 15                           | ±25%      | 0.05                     | 1500                      | 0.8                 | MMZ1608Y150BT□□□ |
| 30                           | ±25%      | 0.05                     | 1500                      | 0.8                 | MMZ1608Y300BT□□□ |
| 60                           | ±25%      | 0.15                     | 500                       | 0.8                 | MMZ1608Y600BT□□□ |
| 120                          | ±25%      | 0.20                     | 500                       | 0.8                 | MMZ1608Y121BT□□□ |
| 220                          | ±25%      | 0.30                     | 500                       | 0.8                 | MMZ1608Y221BT□□□ |
| 300                          | ±25%      | 0.30                     | 500                       | 0.8                 | MMZ1608Y301BT□□□ |
| 470                          | ±25%      | 0.35                     | 500                       | 0.8                 | MMZ1608Y471BT□□□ |
| 600                          | ±25%      | 0.40                     | 500                       | 0.8                 | MMZ1608Y601BT□□□ |
| 750                          | ±25%      | 0.45                     | 500                       | 0.8                 | MMZ1608Y751BT□□□ |
| 1000                         | ±25%      | 0.50                     | 400                       | 0.8                 | MMZ1608Y102BT□□□ |
| 1500                         | ±25%      | 0.60                     | 300                       | 0.8                 | MMZ1608Y152BT□□□ |
| 1800                         | ±25%      | 0.80                     | 200                       | 0.8                 | MMZ1608A182BT□□□ |
| 2200                         | ±25%      | 0.80                     | 200                       | 0.8                 | MMZ1608A222BT□□□ |
| 2500                         | ±25%      | 0.80                     | 200                       | 0.8                 | MMZ1608A252BT□□□ |
| 120                          | ±25%      | 0.30                     | 500                       | 0.8                 | MMZ1608Q121BT□□□ |
| 220                          | ±25%      | 0.40                     | 500                       | 0.8                 | MMZ1608Q221BT□□□ |
| 330                          | ±25%      | 0.50                     | 400                       | 0.8                 | MMZ1608Q331BT□□□ |
| 470                          | ±25%      | 0.70                     | 300                       | 0.8                 | MMZ1608Q471BT□□□ |
| 600                          | ±25%      | 0.80                     | 200                       | 0.8                 | MMZ1608Q601BT□□□ |
| 1000                         | ±25%      | 1.00                     | 200                       | 0.8                 | MMZ1608Q102BT□□□ |

#### ○ Measurement equipment

| Measurement item | Product No.   | Manufacturer         |
|------------------|---------------|----------------------|
| Impedance        | E4991A+16192A | Agilent Technologies |
| DC resistance    | Type-7556     | Yokogawa             |

\* Equivalent measurement equipment may be used.

# MMZ series **MMZ1608 Type**

## ■ ELECTRICAL CHARACTERISTICS

### □ CHARACTERISTICS SPECIFICATION TABLE

| Impedance<br>[100MHz]<br>( $\Omega$ ) | Tolerance     | DC resistance<br>( $\Omega$ )max. | Rated current<br>(mA)max. | Thickness T<br>(mm) | Part No.         |
|---------------------------------------|---------------|-----------------------------------|---------------------------|---------------------|------------------|
| 5                                     | $\pm 2\Omega$ | 0.05                              | 700                       | 0.8                 | MMZ1608D050CT□□□ |
| 10                                    | $\pm 5\Omega$ | 0.10                              | 500                       | 0.6                 | MMZ1608D100CT□□□ |
| 22                                    | $\pm 25\%$    | 0.20                              | 500                       | 0.6                 | MMZ1608D220CT□□□ |
| 50                                    | $\pm 25\%$    | 0.25                              | 500                       | 0.6                 | MMZ1608D500CT□□□ |
| 80                                    | $\pm 25\%$    | 0.30                              | 500                       | 0.6                 | MMZ1608D800CT□□□ |
| 80                                    | $\pm 25\%$    | 0.30                              | 500                       | 0.8                 | MMZ1608D800BT□□□ |
| 120                                   | $\pm 25\%$    | 0.30                              | 400                       | 0.6                 | MMZ1608D121CT□□□ |
| 120                                   | $\pm 25\%$    | 0.30                              | 400                       | 0.8                 | MMZ1608D121BT□□□ |
| 240                                   | $\pm 25\%$    | 0.60                              | 300                       | 0.8                 | MMZ1608D241CT□□□ |
| 300                                   | $\pm 25\%$    | 0.70                              | 300                       | 0.8                 | MMZ1608D301BT□□□ |
| 3typ.                                 |               | 0.05                              | 700                       | 0.8                 | MMZ1608F030BT□□□ |
| 47                                    | $\pm 25\%$    | 0.40                              | 500                       | 0.8                 | MMZ1608F470BT□□□ |
| 75                                    | $\pm 25\%$    | 0.55                              | 300                       | 0.8                 | MMZ1608F750BT□□□ |
| 120                                   | $\pm 25\%$    | 0.75                              | 200                       | 0.8                 | MMZ1608F121BT□□□ |

### ○ Measurement equipment

| Measurement item | Product No.   | Manufacturer         |
|------------------|---------------|----------------------|
| Impedance        | E4991A+16192A | Agilent Technologies |
| DC resistance    | Type-7556     | Yokogawa             |

\* Equivalent measurement equipment may be used.

# MMZ series MMZ1608 Type

## ELECTRICAL CHARACTERISTICS

### Z VS. FREQUENCY CHARACTERISTICS (BY SERIES)

MMZ1608B SERIES




MMZ1608R SERIES




MMZ1608S SERIES



MMZ1608Y SERIES

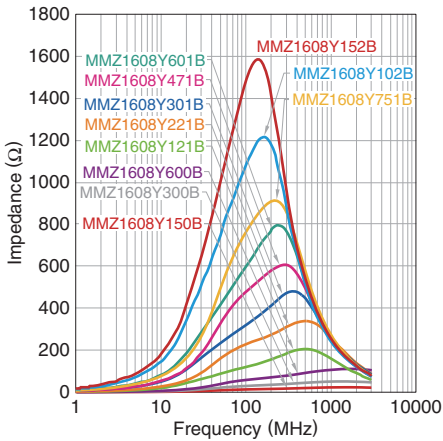


MMZ1608A SERIES

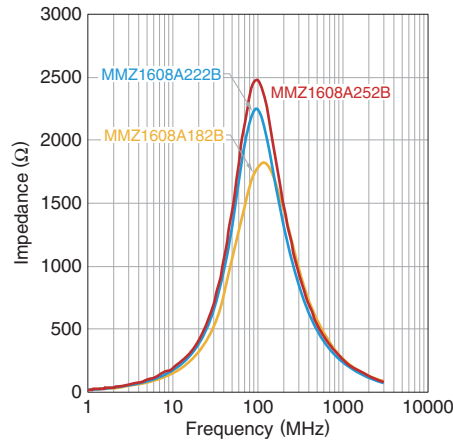


MMZ1608Q SERIES



MMZ1608D SERIES

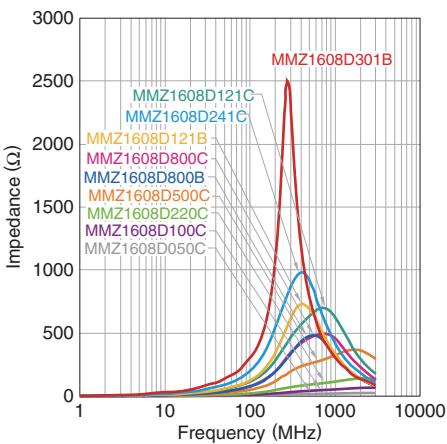

MMZ1608F SERIES

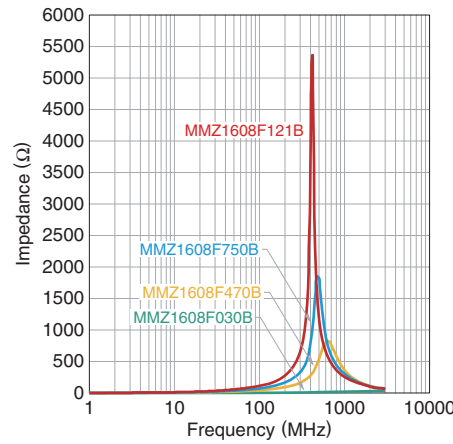


• All specifications are subject to change without notice.

# MMZ series MMZ1608 Type


## ELECTRICAL CHARACTERISTICS

### Z, X, R VS. FREQUENCY CHARACTERISTICS


MMZ1608B121C

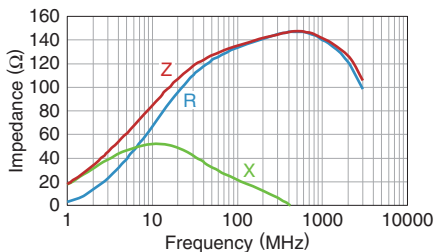


MMZ1608B221C

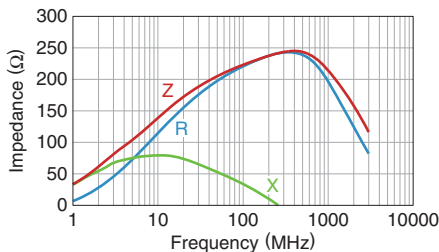


MMZ1608B301C

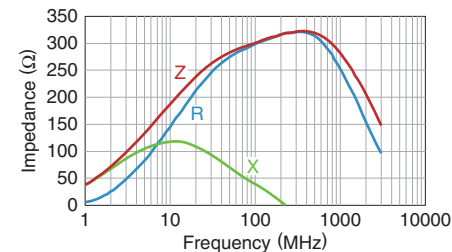


MMZ1608B471C

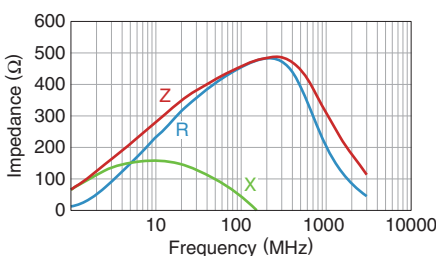


MMZ1608B601C

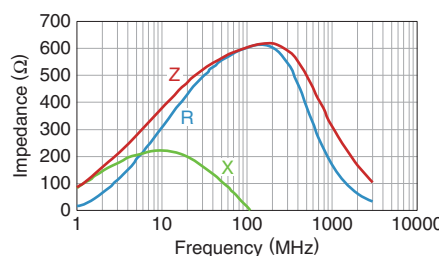


MMZ1608B102C

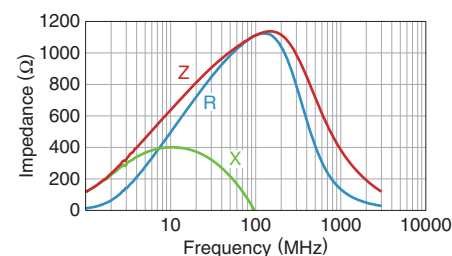


MMZ1608R150A

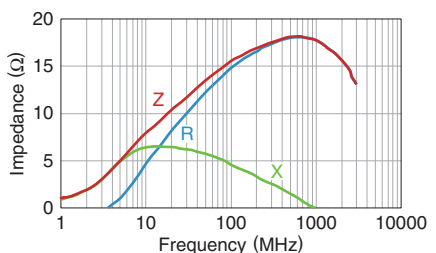


MMZ1608R300A

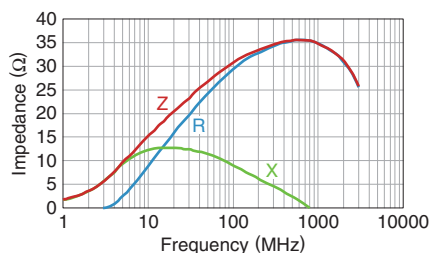


MMZ1608R600A

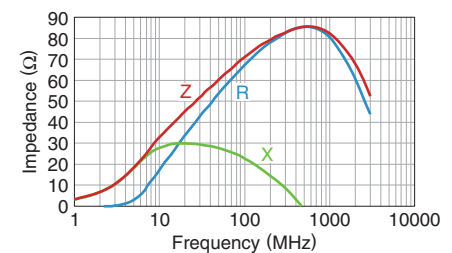


MMZ1608R121A

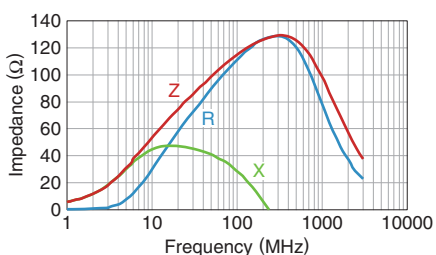


MMZ1608R301A

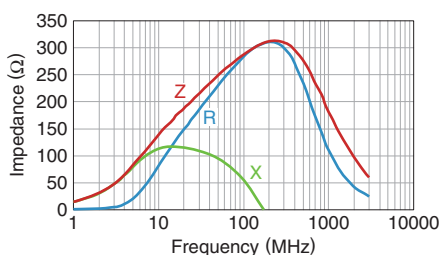


MMZ1608R471A

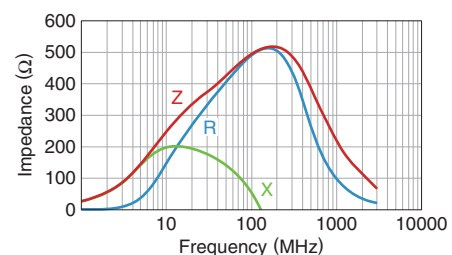


MMZ1608R601A

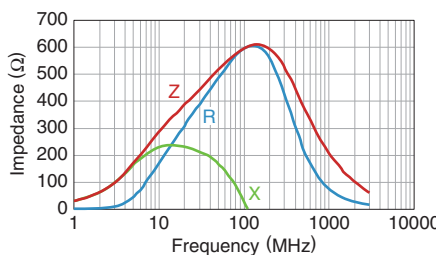

MMZ1608R102A

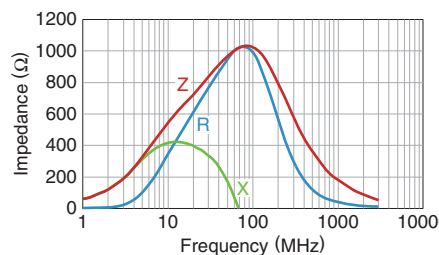

MMZ1608S400A

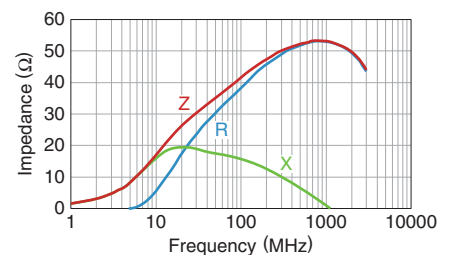

• All specifications are subject to change without notice.




# MMZ series MMZ1608 Type


## ELECTRICAL CHARACTERISTICS

### Z, X, R VS. FREQUENCY CHARACTERISTICS


MMZ1608S800A

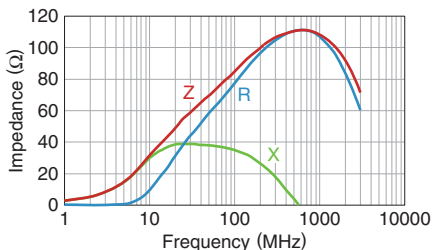


MMZ1608S121A

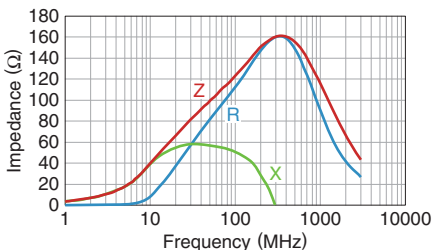


MMZ1608S181A

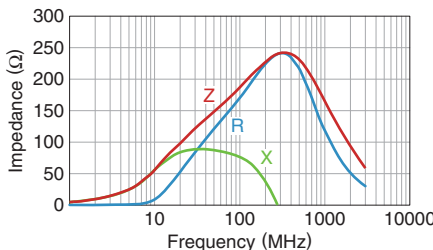


MMZ1608S221A

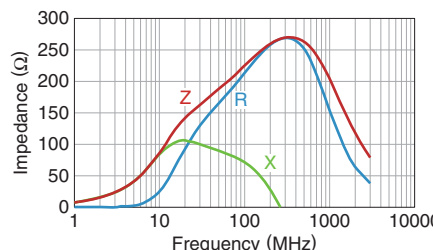


MMZ1608S301A

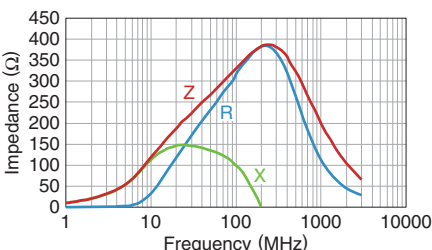


MMZ1608S471A

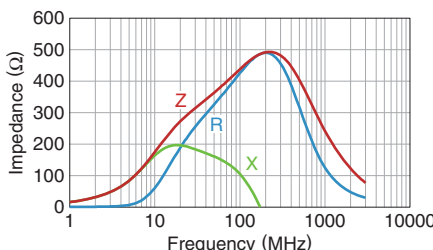


MMZ1608S601A

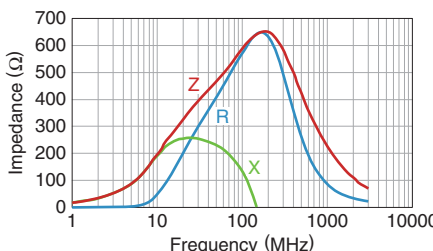


MMZ1608S102A

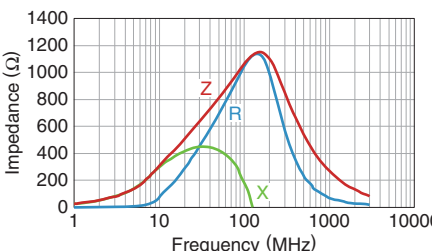


MMZ1608S202A

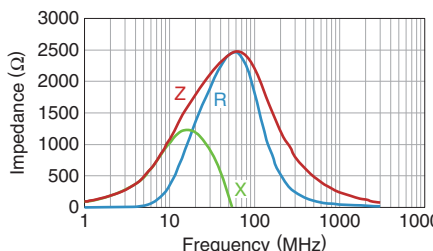


MMZ1608Y150B

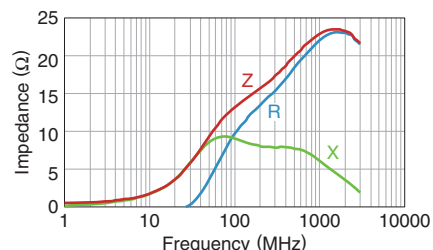


MMZ1608Y300B

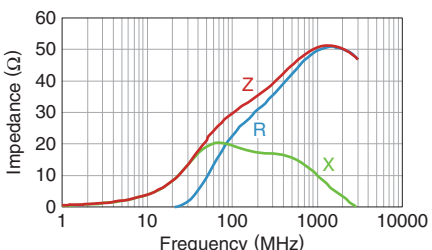


MMZ1608Y600B

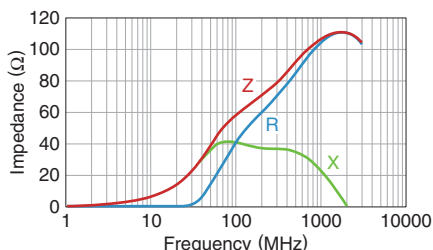


MMZ1608Y121B

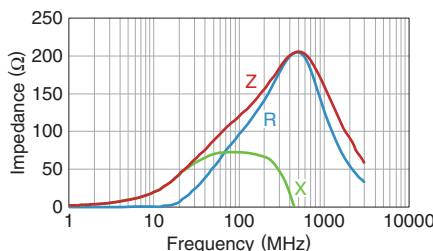

MMZ1608Y221B

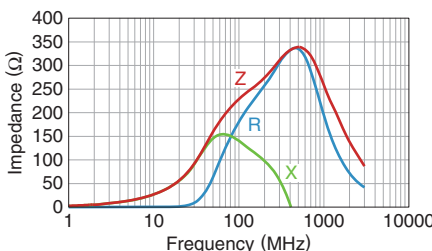

MMZ1608Y301B

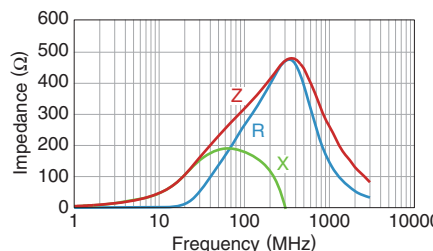

• All specifications are subject to change without notice.

# MMZ series MMZ1608 Type


## ELECTRICAL CHARACTERISTICS

### Z, X, R VS. FREQUENCY CHARACTERISTICS


MMZ1608Y471B



MMZ1608Y601B

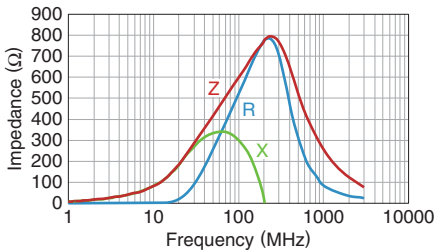


MMZ1608Y751B

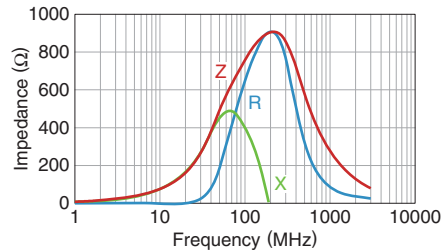

MMZ1608Y102B




MMZ1608Y152B

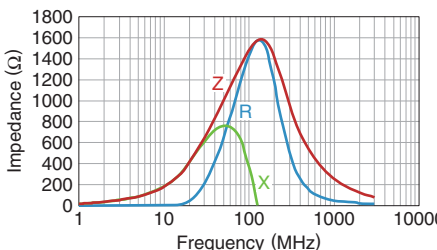


MMZ1608A182B



MMZ1608A222B

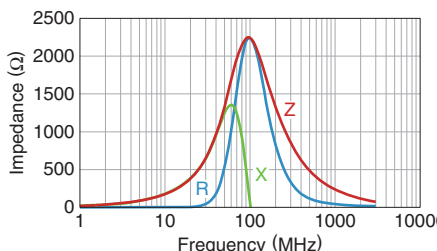


MMZ1608A252B

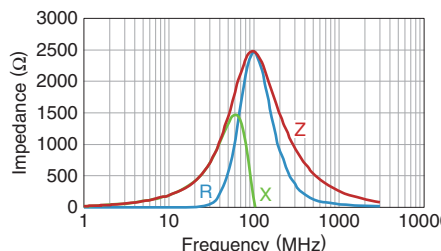


MMZ1608Q121B



MMZ1608Q221B

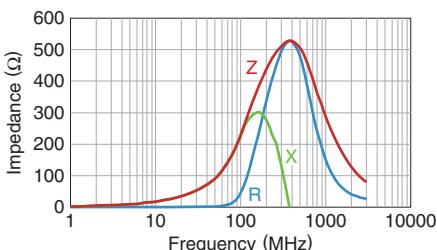


MMZ1608Q331B

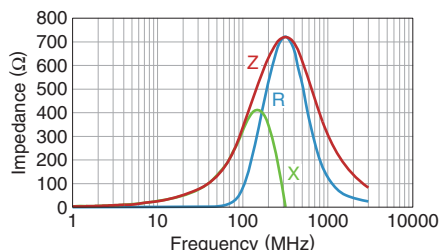


MMZ1608Q471B



MMZ1608Q601B

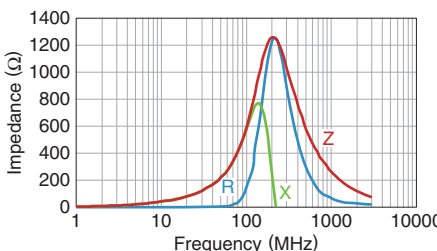

MMZ1608Q102B

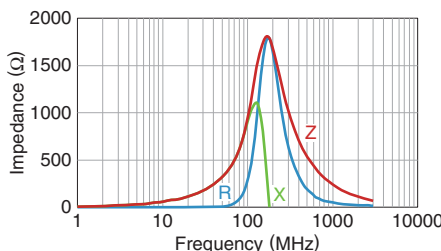


• All specifications are subject to change without notice.

# MMZ series MMZ1608 Type


## ELECTRICAL CHARACTERISTICS

### Z, X, R VS. FREQUENCY CHARACTERISTICS


MMZ1608D050C

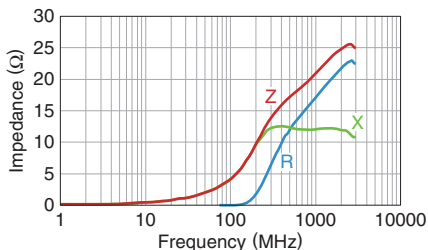


MMZ1608D100C

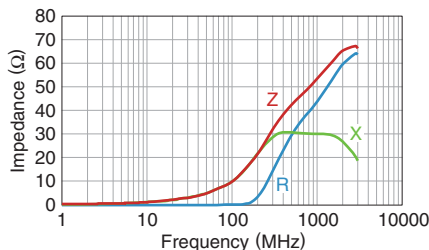


MMZ1608D220C

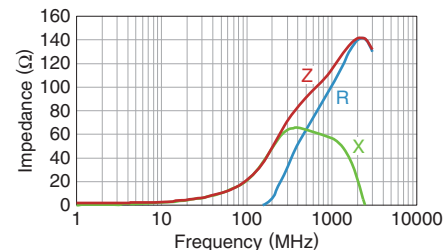


MMZ1608D500C

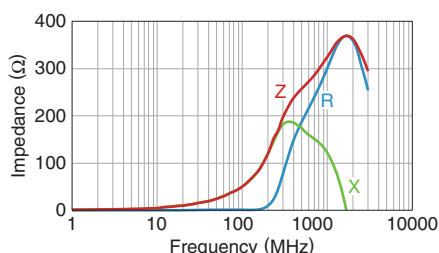


MMZ1608D800C

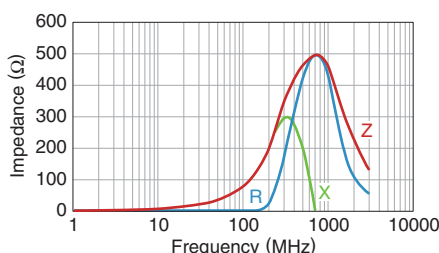


MMZ1608D800B

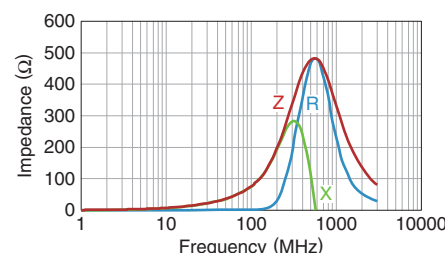


MMZ1608D121C

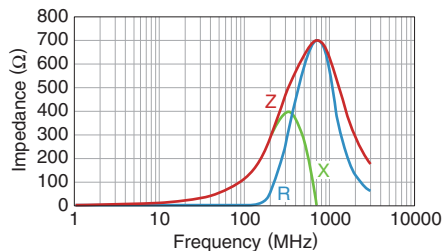


MMZ1608D121B

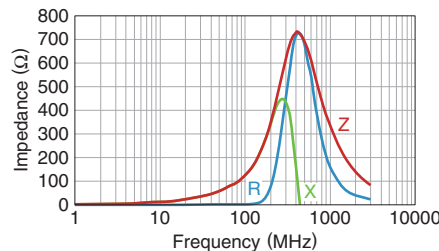


MMZ1608D241C

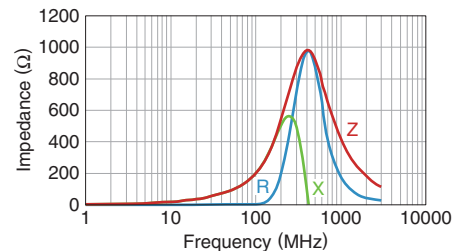


MMZ1608D301B

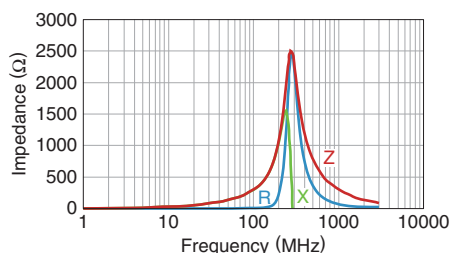


MMZ1608F030B

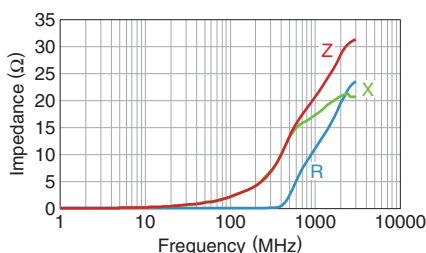


MMZ1608F470B

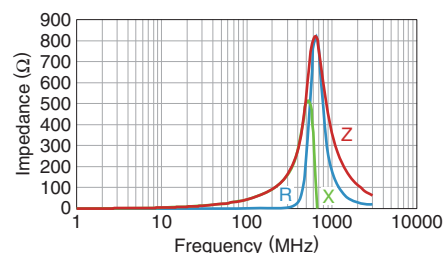

MMZ1608F750B

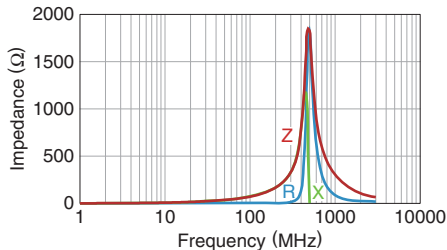

MMZ1608F121B

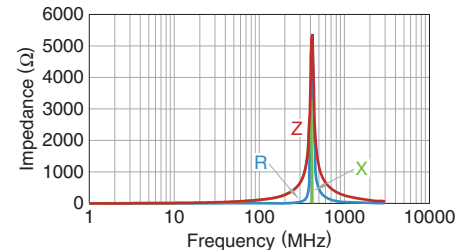


• All specifications are subject to change without notice.

MMZ series

# MMZ2012 Type




## SHAPE & DIMENSIONS

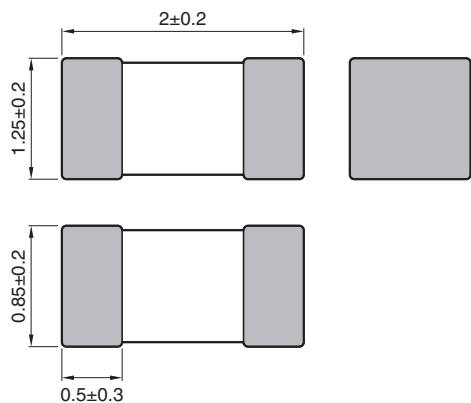

Dimensions in mm

## RECOMMENDED LAND PATTERN

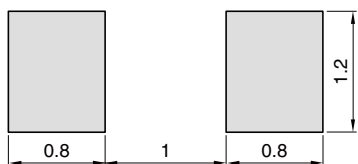

Dimensions in mm

• All specifications are subject to change without notice.

MMZ series **MMZ2012 Type**

## ■ ELECTRICAL CHARACTERISTICS

## □ CHARACTERISTICS SPECIFICATION TABLE

| Impedance<br>[100MHz]<br>(Ω) | Tolerance | DC resistance<br>(Ω)max. | Rated current<br>(mA)max. | Part No.          |
|------------------------------|-----------|--------------------------|---------------------------|-------------------|
|                              |           |                          |                           |                   |
| 15                           | ±25%      | 0.05                     | 1500                      | MMZ2012R150AT □□□ |
| 30                           | ±25%      | 0.05                     | 1500                      | MMZ2012R300AT □□□ |
| 60                           | ±25%      | 0.10                     | 1000                      | MMZ2012R600AT □□□ |
| 120                          | ±25%      | 0.12                     | 800                       | MMZ2012R121AT □□□ |
| 300                          | ±25%      | 0.15                     | 600                       | MMZ2012R301AT □□□ |
| 600                          | ±25%      | 0.20                     | 500                       | MMZ2012R601AT □□□ |
| 1000                         | ±25%      | 0.30                     | 500                       | MMZ2012R102AT □□□ |
| 40                           | ±25%      | 0.10                     | 1000                      | MMZ2012S400AT □□□ |
| 80                           | ±25%      | 0.10                     | 800                       | MMZ2012S800AT □□□ |
| 120                          | ±25%      | 0.15                     | 800                       | MMZ2012S121AT □□□ |
| 180                          | ±25%      | 0.15                     | 600                       | MMZ2012S181AT □□□ |
| 300                          | ±25%      | 0.20                     | 600                       | MMZ2012S301AT □□□ |
| 600                          | ±25%      | 0.30                     | 500                       | MMZ2012S601AT □□□ |
| 1000                         | ±25%      | 0.35                     | 500                       | MMZ2012S102AT □□□ |
| 15                           | ±25%      | 0.05                     | 1500                      | MMZ2012Y150BT □□□ |
| 30                           | ±25%      | 0.05                     | 1500                      | MMZ2012Y300BT □□□ |
| 60                           | ±25%      | 0.10                     | 1000                      | MMZ2012Y600BT □□□ |
| 120                          | ±25%      | 0.12                     | 800                       | MMZ2012Y121BT □□□ |
| 300                          | ±25%      | 0.15                     | 600                       | MMZ2012Y301BT □□□ |
| 600                          | ±25%      | 0.20                     | 500                       | MMZ2012Y601BT □□□ |
| 1000                         | ±25%      | 0.30                     | 500                       | MMZ2012Y102BT □□□ |
| 1500                         | ±25%      | 0.40                     | 500                       | MMZ2012Y152BT □□□ |
| 2000                         | ±25%      | 0.50                     | 400                       | MMZ2012Y202BT □□□ |
| 80                           | ±25%      | 0.30                     | 500                       | MMZ2012D800BT □□□ |
| 120                          | ±25%      | 0.30                     | 500                       | MMZ2012D121BT □□□ |
| 300                          | ±25%      | 0.50                     | 400                       | MMZ2012D301BT □□□ |

## ○ Measurement equipment

| Measurement item | Product No.   | Manufacturer         |
|------------------|---------------|----------------------|
| Impedance        | E4991A+16192A | Agilent Technologies |
| DC resistance    | Type-7556     | Yokogawa             |

\* Equivalent measurement equipment may be used.

# MMZ series MMZ2012 Type

## ELECTRICAL CHARACTERISTICS

### Z VS. FREQUENCY CHARACTERISTICS (BY SERIES)


MMZ2012R SERIES



MMZ2012S SERIES



MMZ2012Y SERIES

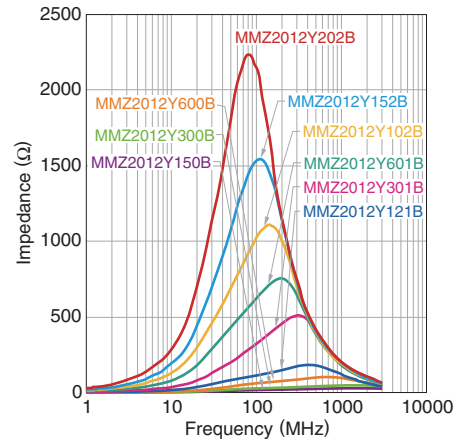

MMZ2012D SERIES




• All specifications are subject to change without notice.

# MMZ series MMZ2012 Type


## ELECTRICAL CHARACTERISTICS

### Z, X, R VS. FREQUENCY CHARACTERISTICS


MMZ2012R150A

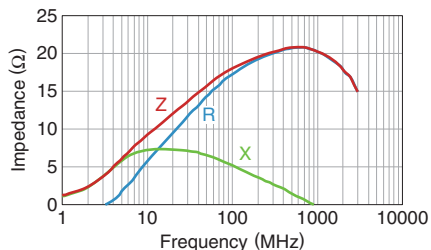


MMZ2012R300A

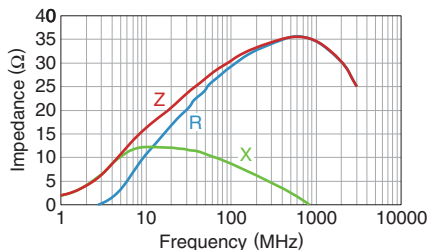


MMZ2012R600A

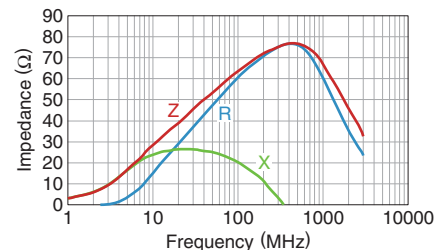


MMZ2012R121A

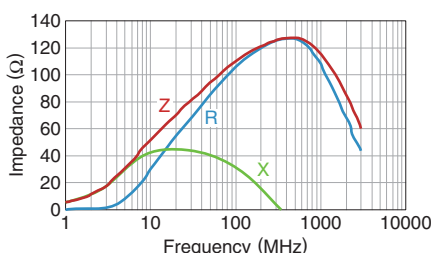


MMZ2012R301A

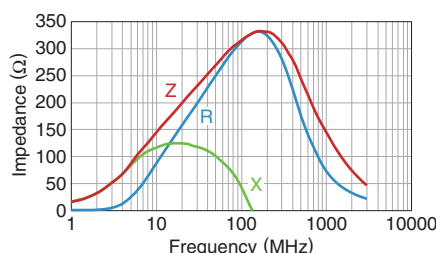


MMZ2012R601A

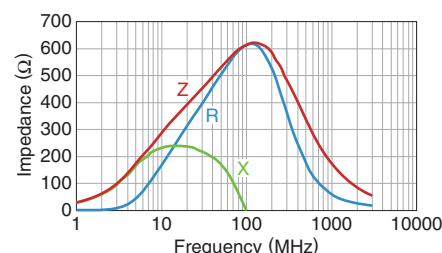


MMZ2012R102A

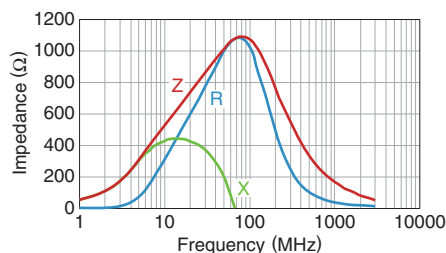


MMZ2012S400A

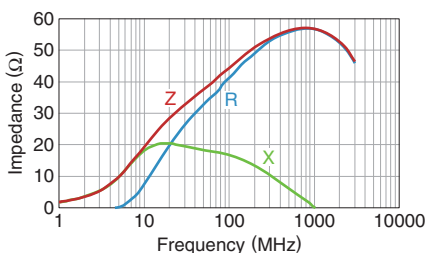


MMZ2012S800A

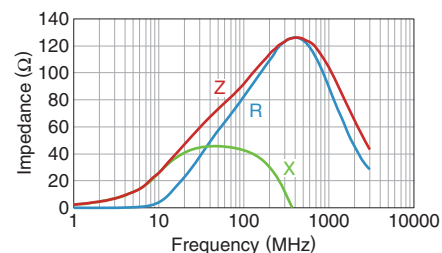


MMZ2012S121A

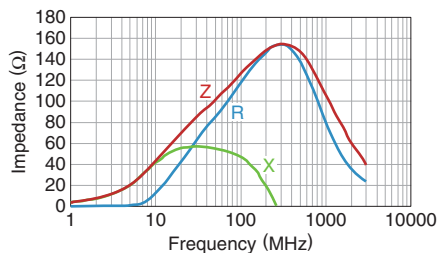


MMZ2012S181A

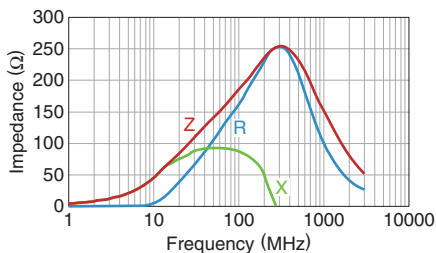


MMZ2012S301A

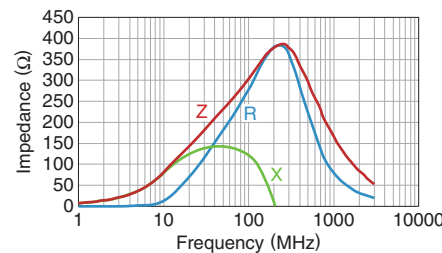


MMZ2012S601A

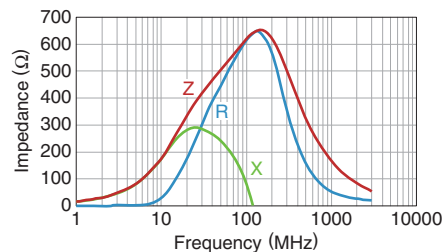

MMZ2012S102A

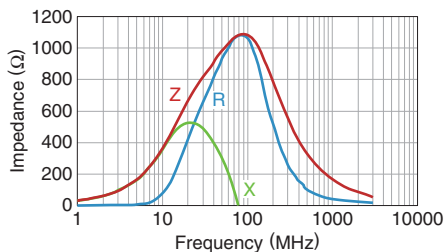

MMZ2012Y150B

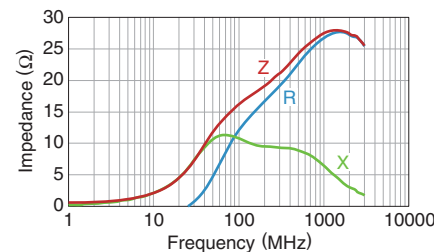


• All specifications are subject to change without notice.

# MMZ series MMZ2012 Type


## ELECTRICAL CHARACTERISTICS

### Z, X, R VS. FREQUENCY CHARACTERISTICS


MMZ2012Y300B

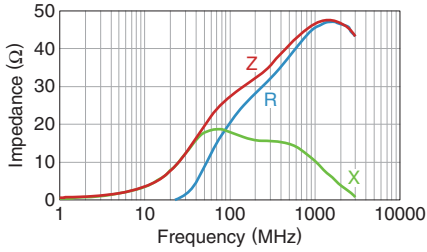


MMZ2012Y600B

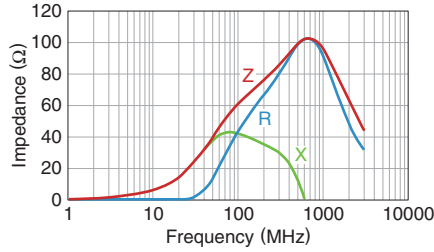


MMZ2012Y121B

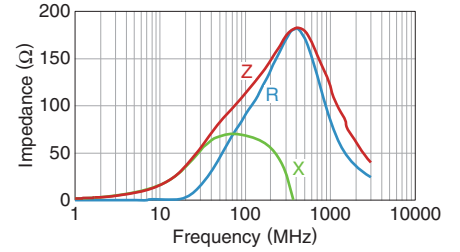


MMZ2012Y301B

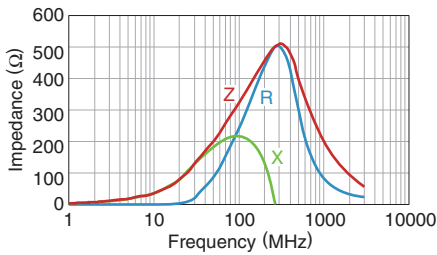


MMZ2012Y601B

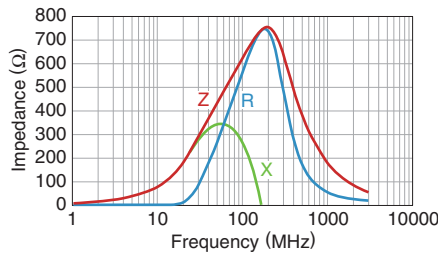


MMZ2012Y102B

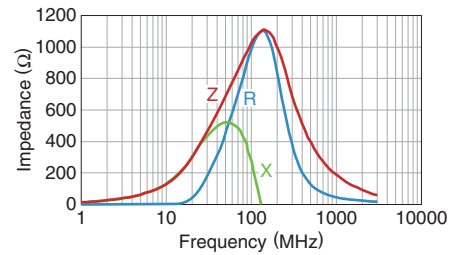


MMZ2012Y152B

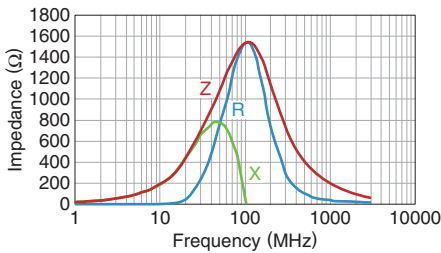


MMZ2012Y202B

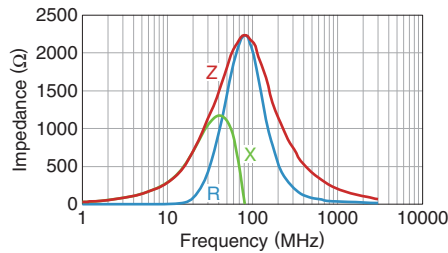


MMZ2012D800B

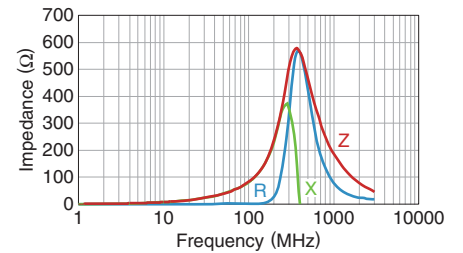

MMZ2012D121B

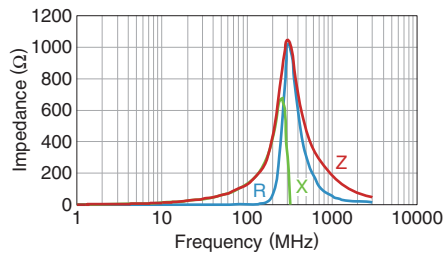

MMZ2012D301B

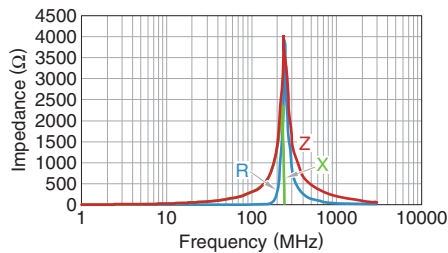


• All specifications are subject to change without notice.




MMZ series

# Packaging style


## REEL DIMENSIONS

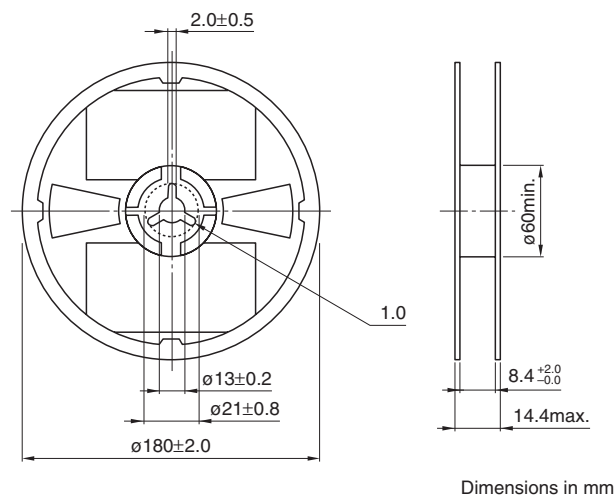

## TAPE DIMENSIONS

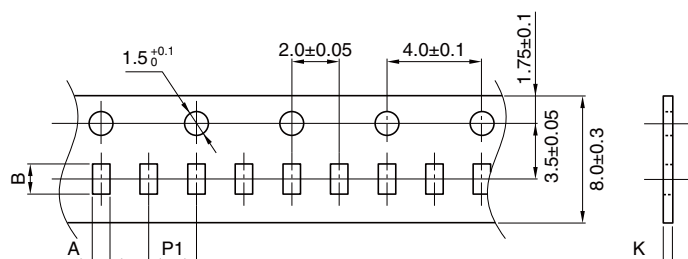

| Type    | A         | B         | P1       | K       |
|---------|-----------|-----------|----------|---------|
| MMZ0402 | 0.26±0.04 | 0.46±0.04 | 2.0±0.05 | 0.4max. |
| MMZ0603 | 0.38±0.05 | 0.68±0.05 | 2.0±0.05 | 0.5max. |
| MMZ1005 | 0.65±0.1  | 1.15±0.1  | 2.0±0.05 | 0.8max. |
| MMZ1608 | 1.1±0.2   | 1.9±0.2   | 4.0±0.1  | 1.1max. |
| MMZ2012 | 1.5±0.2   | 2.3±0.2   | 4.0±0.1  | 1.1max. |

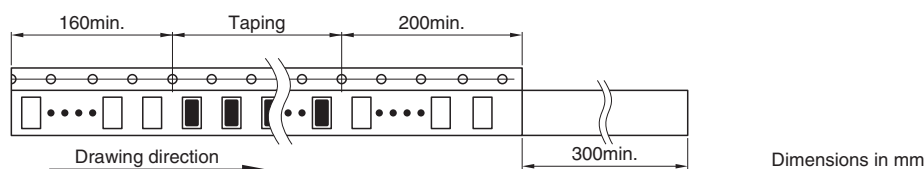

• All specifications are subject to change without notice.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [TDK manufacturer](#):*

Other Similar products are found below :

[C3216X5R1C476M\(160AB\)](#) [C1608X7R1C474M\(080AC\)](#) [C1608CH1H121J080AA](#) [CKG57KX7R1H106M](#) [R14493](#)  
[C1608JB1H333M080AA](#) [CKCA43CH1H331K100AA](#) [SWS1000L-24/BL](#) [C4532X7R1H155K/1.60](#) [VLF10045T-4R7N6R1](#)  
[C0603JB1A153M030BC](#) [C1608CH1H020C080AA](#) [C3225NP02A473J230AA](#) [CKG45KX7R1H475M](#) [C1608CH1H121K080AA](#)  
[VLP6045LT-1R5N](#) [C1608CH1H1R5C080AA](#) [VLF5010AT-220MR50-2](#) [C1608CH1H221J080AA](#) [LGJ45B-110-2P-TL003](#)  
[C1608JB1H153M080AA](#) [VLF3012ST-1R0N2R0](#) [FK24X5R0J106M](#) [C1608JB1H223M080AA](#) [B66287GX187](#) [C1005CH1H1R5C050BA](#)  
[TFSQ0402C0H1C2R6WT](#) [C1608X5R1H105K\(080AB\)](#) [C1608X7R1C105M\(080AC\)](#) [C2012X7R1H105M\(125AB\)](#)  
[C1608X7R1H474K\(080AC\)](#) [C0402C0G1C270J](#) [C1005C0G1H220J\(050BA\)](#) [C0603X5R1E332K030BA](#) [C0603C0G1E680J030BA](#) [CXA-2115](#)  
[MCZ1210AH301L2T](#) [78P7200-IH/F](#) [MLP2012S1R5TT](#) [ACT45B-KIT](#) [NL565050T-822J-PF](#) [C1005JB1H471K050BA](#)  
[C1608CH1H151J080AA](#) [C3216X6S1V106K160AC](#) [C4532NP01H154J250KA](#) [JWS150-24/A](#) [CD75-B2GA331KYGKA](#) [CLF10040T-221M](#)  
[CLF12555T-220M](#) [R22095\\*REPAIRED](#)