

# Fast Response Thermocouples With Self-Adhesive Backing





## SA1 Series

- ✓ Self Adhesive Backing for Easy Installation
- ✓ Better Than 0.3 Second Response Time
- ✓ 1 m (40") or 2 m (80") Color-Coded PFA Insulated Leads
- ✓ Rated to 175°C (350°F) Long Term
- ✓ Available in J, K, T, and E Calibrations




To Order	
Model No.	Description, "L" Dimension, Termination
SA1-(*)	Thermocouple, 1 m (40") long, stripped ends**
SA1-(*)-72	Thermocouple, 2 m (80") long, stripped ends**
SA1-(*)-120	Thermocouple, 3 m (120") long, stripped ends**
SA1-(*)-SRTC	SA1-(*) with molded strain relief and SMP male connector

\* Specify J, K, T or E thermocouple type.  
 \*\* For a male straight M8 plug add "M8-S-M" to the model number for additional cost. For a male straight M12 plug add "M12-S-M" to the model number for additional cost.  
 \*\* For a male right-angled M8 plug add "M8-R-M" to the model number for additional cost. For a male right-angled M12 plug add "M12-R-M" to the model number for additional cost.  
**Ordering Example:** SA1-K, pkg of 5 self-adhesive Type K thermocouples, 30 AWG PFA insulation, 1 m (40") long.

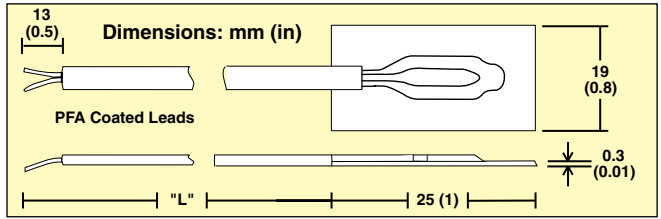

175°C (350°F) Temperature Rating

## With Miniature Connector and Spool Caddy

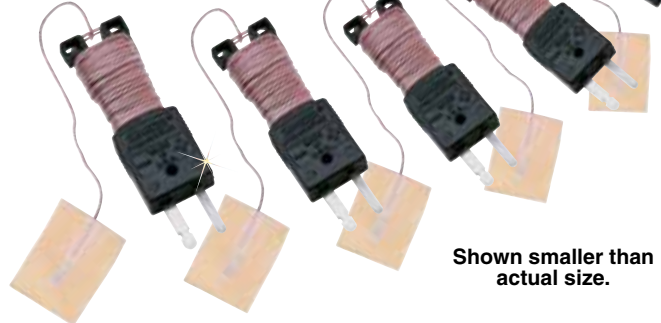

To Order			
Model No.	Wire Gauge	Length m (in)	Insulation
SA1-J-SC	30	1 (40)	PFA
SA1-K-SC	30	1 (40)	PFA
SA1-T-SC	30	1 (40)	PFA
SA1-E-SC	30	1 (40)	PFA
SA1-J-72-SC	30	2 (80)	PFA
SA1-K-72-SC	30	2 (80)	PFA
SA1-T-72-SC	30	2 (80)	PFA
SA1-E-72-SC	30	2 (80)	PFA

**Note:** 2 m (80") is the longest length available with spool caddy.  
**Ordering Example:** SA1-K-SC, package of 5 self-adhesive Type K thermocouples, 30 AWG PFA insulation, 1 m (40") long.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [omega manufacturer](#):*

Other Similar products are found below :

[PX309-5KGI](#) [SMPW-J-M](#) [5SC-TT-T-36-36](#) [5SRTC-TT-K-30-72](#) [MJP2-12-T](#) [CASS-116U-12](#) [CHAL-002](#) [DH-1-20-J-12](#) [GG-J-24-SLE-1000](#)  
[HPC-AU-P](#) [HPC-IR-P](#) [KHSS-18G-RSC-12](#) [KMQIN-125U-6](#) [KMQXL-125G-12](#) [KMQXL-125U-6](#) [KQSS-18G-6](#) [KQXL-14U-36](#) [KQXL-](#)  
[18G-12](#) [NB3-CAXL-14U-18](#) [PX309-100AI](#) [PX309-100AV](#) [PX309-100GV](#) [PX319-V050G5V](#) [PX319-V100G5V](#) [PX319-002GI](#) [PX319-](#)  
[050GI](#) [PX319-100GV](#) [PX319-200AV](#) [PX319-200A5V](#) [PX319-300G5V](#) [PX319-500G5V](#) [PX319-7.5KGI](#) [PX319-7.5KG5V](#) [PX329-1KG5V](#)  
[PX329-10KGI](#) [PX329-2KGI](#) [PX409-015VUSBH](#) [PX409-015VV](#) [PX409-050A5V](#) [PX409-1.0KGUSBH](#) [PX409-10WVI](#) [PX409-100A5V](#)  
[PX409-5.0KG5V](#) [PX409-500GUSBH](#) [PX41T0-300GI](#) [PX419-250GI](#) [P10R-005](#) [SA1-RTD-4W-120](#) [SA1-T-72-SRTC](#) [SA1XL-K-SRTC](#)