

## Air-Quality Detection Module (Model: ZP01-MP503)

# User's Manual

Version: 1.4

Valid from 2014-11-01

Zhengzhou Winsen Electronics Technology Co., Ltd

## Statement

This manual's copyright belongs to Zhengzhou Winsen Electronics Technology Co., LTD. Without the written permission, any part of this manual shall not be copied, translated, stored in database or retrieval system, also can't spread through electronic, copying, record ways.

Thanks for purchasing our product. In order to let customers use it better and reduce the faults caused by misuse, please read the manual carefully and operate it correctly in accordance with the instructions. If users disobey the terms or remove, disassemble, change the components inside of the sensor, we shall not be responsible for the loss.

The specific such as color, appearance, sizes &etc., please in kind prevail.

We are devoting ourselves to products development and technical innovation, so we reserve the right to improve the products without notice. Please confirm it is the valid version before using this manual. At the same time, users' comments on optimized using way are welcome.

Please keep the manual properly, in order to get help if you have questions during the usage in the future.

#### Zhengzhou Winsen Electronics Technology CO., LTD.

## ZP01-MP503 Air-Quality Detection Module

#### **Product Description**

ZP01-MP503 air-quality module adopts flat surface semiconductor gas sensor. The module has very high sensitivity to volatile organic gases such as formaldehyde, benzene, carbon monoxide, ammonia, hydrogen, alcohol and smoke of cigarette, essence &etc. The module has been aging, debugged, adjusted and calibrated. So it has good consistency and high sensitivity.



#### Features


High sensitivity and good long-term stability Low power consumption, long life Calibrated before shipment 10 seconds to 3 minutes with auto-preheating function Faulty auto-check, high cost-effective

#### Application


Air cleaner, fresh-air system, intelligent integrated ceiling, air quality monitor, ventilator, air-condition.

#### Parameters

SensorAir quality sensorFormaldehyde, benzene, carbon monoxide, hydrogen, alcohol, ammonia, smoke of cigarette, essence &etc.Physical InterfaceXH2.54-4P terminal socketsOutput Data0-3 grade pollution signalOutput Data0-3 grade pollution signalWorking Voltage5.0±0.2V DC (No voltage reverse connect protection)Output DataTTL level (2000hm protected resistance inside)Working Current≤60mAWarm Up Time≤3 minResponse Time≤20sRecovery Timeo~50°COperating Temperature0~50°COperating Humidity≤95% RHStorage Temperature-20~60°CStorage Humidity≤20gSize24×20×15mm (L×W×H)Weight≤20gSensitivity Attenuator≤1%/yearLife Span≥5 years				
Target Gasmonoxide, hydrogen,alcohol, ammonia, smoke of cigarette, essence &etc.Physical InterfaceXH2.54-4P terminal socketsOutput Data0−3 grade pollution signalOutput Data0−3 grade pollution signalWorking Voltage5.0±0.2V DC (No voltage reverse connect protection)Output DataTTL level (200ohm protected resistance inside)Working Current≤60mAWarm Up Time≤3 minResponse Time≤20sRecovery Time≤60sOperating Temperature0~50°COperating Humidity≤95% RHStorage Temperature−20~60°CStorage Humidity≤60% RHSize24×20×15mm (L×W×H)Weight≤20gSensitivity Attenuator≤1%/year	Sensor	Air quality sensor		
Target Gasammonia, smoke of cigarette, essence &etc.Physical InterfaceXH2.54-4P terminal socketsOutput Data0-3 grade pollution signalWorking Voltage5.0±0.2V DC (No voltage reverse connect protection)Output DataTTL level (200ohm protected resistance inside)Working Current≤60mAWarm Up Time≤3 minResponse Time≤20sRecovery Time≤60sOperating Temperature0~50°COperating Humidity≤95% RHStorage Temperature-20~60°CStorage Humidity≤20gSensitivity Attenuator≤1%/year		formaldehyde, benzene, carbon		
ammonia, smoke of cigarette, essence &etc.Physical InterfaceXH2.54-4P terminal socketsOutput Data0−3 grade pollution signalWorking Voltage5.0±0.2V DC (No voltage reverse connect protection)Output DataTTL level (200ohm protected resistance inside)Working Current≤60mAWarm Up Time≤3 minResponse Time≤20sRecovery Timeo~50°COperating Temperature0~50°COperating Humidity≤95% RHStorage Temperature-20~60°CStorage Humidity≤0gSize24×20×15mm (L×W×H)Weight≤ 20gSensitivity Attenuator≤1%/year	Target Gas	monoxide, hydrogen,alcohol,		
Physical InterfaceXH2.54-4P terminal socketsOutput Data0-3 grade pollution signalWorking Voltage5.0±0.2V DC (No voltage reverse connect protection)Output DataTTL level (2000hm protected resistance inside)Working Current≤60mAWarm Up Time≤3 minResponse Time≤20sRecovery Timeo~50°COperating Temperature0~50°COperating Humidity≤95% RHStorage Temperature24×20×15mm (L×W×H)Size24×20x15mm (L×W×H)Weight≤ 20gSensitivity Attenuator≤1%/year		ammonia, smoke of cigarette,		
Nynexi interverseInfinitive ContentOutput Data0-3 grade pollution signalWorking Voltage5.0±0.2V DC (No voltage reverse connect protection)Output DataTTL level (200ohm protected resistance inside)Working Current≤60mAWarm Up Time≤3 minResponse Time≤20sRecovery Time0~50°COperating Temperature0~50°COperating Humidity≤95% RHStorage Temperature-20~60°CStorage Humidity≤60% RHSize24×20×15mm (L×W×H)Weight≤ 20gSensitivity Attenuator≤1%/year		essence &etc.		
Working Voltage5.0±0.2V DC (No voltage reverse connect protection)Output DataTTL level (200ohm protected resistance inside)Working Current≤60mAWarm Up Time≤3 minResponse Time≤20sRecovery Time≤60sOperating Temperature0~50°COperating Humidity≤95% RHStorage Temperature-20~60°CStorage Humidity≤60% RHSize24×20×15mm (L×W×H)Weight≤ 20gSensitivity Attenuator≤1%/year	Physical Interface	XH2.54-4P terminal sockets		
Working Voltageconnect protection)Output DataTTL level (200ohm protected resistance inside)Working Current≤60mAWarm Up Time≤3 minResponse Time≤20sRecovery Time≤60sOperating Temperature0~50°COperating Humidity≤95% RHStorage Temperature−20~60°CStorage Humidity≤60% RHSize24×20×15mm (L×W×H)Weight≤ 20gSensitivity Attenuator≤1%/year	Output Data	0-3 grade pollution signal		
Connect protection)Output DataTTL level (200ohm protected resistance inside)Working Current≤60mAWarm Up Time≤3 minResponse Time≤20sRecovery Time≤60sOperating Temperature0~50°COperating Humidity≤95% RHStorage Temperature−20~60°CStorage Temperature24×20×15mm (L×W×H)Size24×20×15mm (L×W×H)Weight≤ 20gSensitivity Attenuator≤1%/year	Working Voltage	5.0±0.2V DC (No voltage reverse		
Output Dataresistance inside)Working Current≤60mAWarm Up Time≤3 minResponse Time≤20sRecovery Time≤60sOperating Temperature0~50°COperating Humidity≤95% RHStorage Temperature-20~60°CStorage Humidity≤60% RHSize24×20×15mm (L×W×H)Weight≤ 20gSensitivity Attenuator≤1%/year		connect protection)		
resistance inside)Working Current≤60mAWarm Up Time≤3 minResponse Time≤20sRecovery Time≤60sOperating Temperature0~50°COperating Humidity≤95% RHStorage Temperature-20~60°CStorage Humidity≤60% RHSize24×20×15mm (L×W×H)Weight≤ 20gSensitivity Attenuator≤1%/year	Output Data	TTL level (200ohm protected		
Warm Up Time≤3 minResponse Time≤20sRecovery Time≤60sOperating Temperature0~50°COperating Humidity≤95% RHStorage Temperature-20~60°CStorage Humidity≤60% RHSize24×20×15mm (L×W×H)Weight≤ 20gSensitivity Attenuator≤1%/year		resistance inside)		
Response Time≤20sRecovery Time≤60sOperating Temperature0~50°COperating Humidity≤95% RHStorage Temperature-20~60°CStorage Humidity≤60% RHSize24×20×15mm (L×W×H)Weight≤ 20gSensitivity Attenuator≤1%/year	Working Current	≤60mA		
Recovery Time≤60sOperating Temperature0~50°COperating Humidity≤95% RHStorage Temperature-20~60°CStorage Humidity≤60% RHSize24×20×15mm (L×W×H)Weight≤ 20gSensitivity Attenuator≤1%/year	Warm Up Time	≤3 min		
Operating Temperature0~50°COperating Humidity≤95% RHStorage Temperature−20~60°CStorage Humidity≤60% RHSize24×20×15mm (L×W×H)Weight≤ 20gSensitivity Attenuator≤1%/year	Response Time	≤20s		
Operating Humidity       ≤95% RH         Storage Temperature       -20~60°C         Storage Humidity       ≤60% RH         Size       24×20×15mm (L×W×H)         Weight       ≤ 20g         Sensitivity Attenuator       ≤1%/year	Recovery Time	≤60s		
Storage Temperature     -20~60°C       Storage Humidity     ≤60% RH       Size     24×20×15mm (L×W×H)       Weight     ≤ 20g       Sensitivity Attenuator     ≤1%/year	Operating Temperature	0∼50℃		
Storage Humidity     ≤60% RH       Size     24×20×15mm (L×W×H)       Weight     ≤ 20g       Sensitivity Attenuator     ≤1%/year	Operating Humidity	≤95%RH		
Size     24×20×15mm (L×W×H)       Weight     ≤ 20g       Sensitivity Attenuator     ≤1%/year	Storage Temperature	<b>−20~60°</b> C		
Weight≤ 20gSensitivity Attenuator≤1%/year	Storage Humidity	≤60%RH		
Sensitivity Attenuator ≤1%/year	Size	24×20×15mm(L×W×H)		
	Weight	≤ 20g		
Life Span ≥5 years	Sensitivity Attenuator	≤1%/year		
	Life Span	≥5 years		

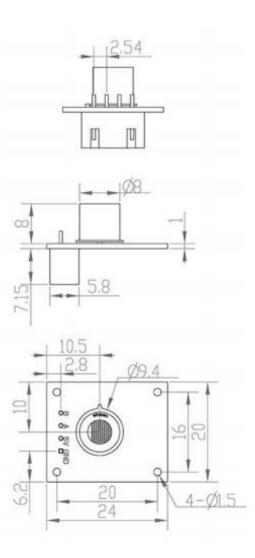


#### Sensitivity Characteristics

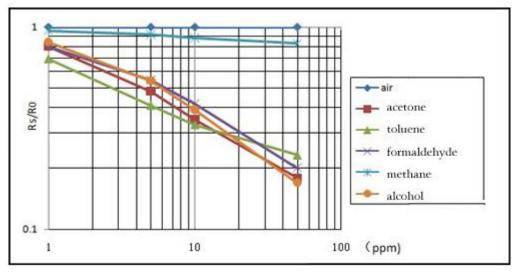

Contrast of the sensitivity in different gases

#### Application of schematic diagram

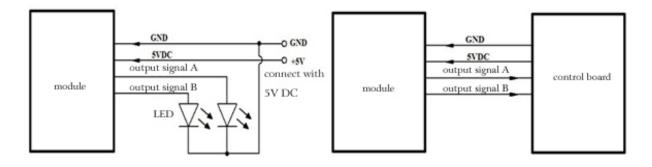

#### Pin definition

Output S	ignal
----------	-------

Pin	Name	Function	
1	GND	Input power -	
2	5V	Input power +	
3	А	Output A	
4	В	Output B	

Grade	Output A	Output B	Pollution Grade
0	0V	0V	Clean
1	0V	+5V	Light pollution
2	+5V	0V	Moderate pollution
3	+5V	+5V	Severe pollution

Tel: 86-371-67169097/67169670 Fax: 86-371-60932988

Email: sales@winsensor.com

Leading gas sensing solutions supplier in China!

#### Cautions

- Please do not put the module in organic solvent (include silica gel and other cementing compound), painting, medicament, oils and fuels, high concentration gas etc.
- Please do not impact or vibrate the module seriously.
- Please warm up for 5 min before first use.
- Please do not use the module related with personal safety.
- Please do not install the module in the severe convection environment.
- Please do not put in the module in high concentration organic gas for long time.

**Note:** To keep continual product development, we reserve the right to change design features without prior notice.

Zhengzhou Winsen Electronics Technology Co., Ltd
Add: No.299, Jinsuo Road, National Hi-Tech Zone, Zhengzhou 450001 China
Tel: +86-371-67169097/67169670
Fax: +86-371-60932988
E-mail: sales@winsensor.com
Website: www.winsen-sensor.com

Tel: 86-371-67169097/67169670Fax: 86-371-60932988Email: sales@winsensor.comLeading gas sensing solutions supplier in China!

#### **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Environmental Test Equipment category:

Click to view products by WINSEN manufacturer:

Other Similar products are found below :

 CW40
 F150C10E3DRT
 F150LTC20
 F150CD10E2
 F150L75
 F150LRS
 S-11
 FLUKE-LDG
 382153
 FM100
 RH210
 382253
 MO290-P

 GEO-CABLE-REEL-50M
 T197914
 RD300-L
 IR11BD
 IR11GM
 IR21BD
 IR31CE
 IR32BC
 IR33BC
 MP7217TC
 NGM-1
 SGX 

 7NH3
 UT381
 F150-SLC50
 AW-CO-1000
 AW-NmHc-100
 3.000.401
 AX-7535
 CS-9S6SS-A
 P 2801
 P 2802
 P 5039
 P 5130
 P

 5055
 P 5060
 P 5065
 P 5086
 P 5090
 P 5115
 P 5135
 P 5140
 P 5145
 P 5150
 P 5160