


## Premium Metallized Polypropylene Film Capacitors – Axial – JFX

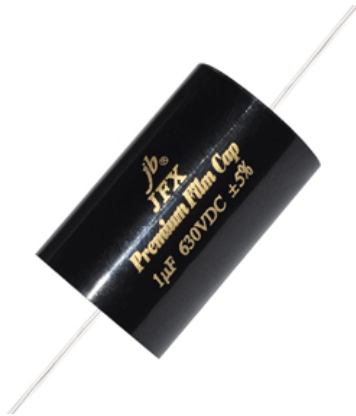


### FEATURES

- Quick transient design
- High Precise Capacitance  $\pm 3\%$ ,  $\pm 5\%$
- Very Low Dielectric absorption factor
- Very Low Dissipation factor
- Very Low ESR
- Very Low Inductance
- Excellent handling of high current audio pulses

### SPECIFICATIONS

Passive flammability	GB10191-88 IEC384-16
Operating temperature	-55°C ~ +85°C
Capacitance range	0.047 ~ 100µF
Capacitance tolerance	$\pm 3\%$ , $\pm 5\%$ 1KHz
Rated voltage	250V, 400V, 630V.DC
Withstand voltage	1.5VR 5S
Dissipation factor	$\leq 0.0020$ 1KHz
Insulate the electric resistance	$> 0.33\mu\text{F}$ $\geq 15000\text{M}\Omega$
Leads Diameter	0.6, 0.8, 1.0, 1.2 Tinned Pure Copper

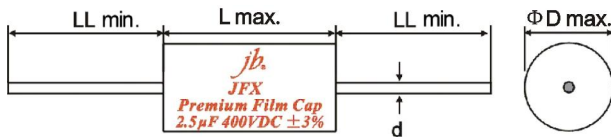

### STANDARD SIZE (mm)

For 0.047µF to 1µF, please consult to our sales for size.

µF	250V					µF	250V				
	Dissipation	$\Phi D$	L	d	LL		Dissipation	$\Phi D$	L	d	LL
1.0uF	$\leq 0.0005$	10.5	21	0.8	25	5.1uF	$\leq 0.0006$	17	31	0.8	35
1.1uF	$\leq 0.0005$	11	21	0.8	25	5.6uF	$\leq 0.0006$	18	31	0.8	35
1.2uF	$\leq 0.0005$	12	21	0.8	25	6.0uF	$\leq 0.0006$	18.5	31	0.8	35
1.3uF	$\leq 0.0005$	12.5	21	0.8	25	6.2uF	$\leq 0.0006$	19	31	0.8	35
1.5uF	$\leq 0.0005$	13.5	21	0.8	25	6.8uF	$\leq 0.0007$	19.5	31	0.8	35
1.6uF	$\leq 0.0005$	14	21	0.8	25	7.0uF	$\leq 0.0007$	20	31	1.0	35
1.8uF	$\leq 0.0005$	14.5	21	0.8	25	7.5uF	$\leq 0.0007$	20.5	31	1.0	35
2.0uF	$\leq 0.0005$	13	26	0.8	30	8.0uF	$\leq 0.0007$	21	31	1.0	35
2.2uF	$\leq 0.0005$	14	26	0.8	30	8.2uF	$\leq 0.0007$	21.5	31	1.0	35
2.4uF	$\leq 0.0005$	14	26	0.8	30	9.1uF	$\leq 0.0007$	22.5	31	1.0	35
2.5uF	$\leq 0.0005$	14.5	26	0.8	30	10uF	$\leq 0.0007$	25	31	1.0	35
2.7uF	$\leq 0.0005$	14.5	26	0.8	30	11uF	$\leq 0.0007$	22	36	1.0	35
3.0uF	$\leq 0.0005$	15.5	26	0.8	30	12uF	$\leq 0.0008$	23	36	1.0	35
3.3uF	$\leq 0.0006$	16.5	26	0.8	35	13uF	$\leq 0.0008$	24	36	1.0	35
3.5uF	$\leq 0.0006$	16.5	26	0.8	35	14uF	$\leq 0.0008$	25	36	1.0	35
3.6uF	$\leq 0.0006$	16.5	26	0.8	35	15uF	$\leq 0.0008$	25.5	36	1.0	35
3.9uF	$\leq 0.0006$	17.5	26	0.8	35	16uF	$\leq 0.0008$	26.5	36	1.0	35
4.0uF	$\leq 0.0006$	17.5	26	0.8	35	18uF	$\leq 0.0008$	28	36	1.0	35
4.3uF	$\leq 0.0006$	18	26	0.8	35	20uF	$\leq 0.0008$	29.5	36	1.0	45
4.5uF	$\leq 0.0006$	18.5	26	0.8	35	22uF	$\leq 0.0009$	31.5	36	1.0	45
4.7uF	$\leq 0.0006$	18.5	26	0.8	35	24uF	$\leq 0.0009$	32	36	1.0	45
5.0uF	$\leq 0.0006$	17	31	0.8	35	27uF	$\leq 0.0009$	34	36	1.0	45

## Premium Metallized Polypropylene Film Capacitors – Axial – JFX

μF	250V					μF	250V				
	Dissipation	ΦD	L	d	LL		Dissipation	ΦD	L	d	LL
28uF	≤0.0009	30	46	1.0	45	51uF	≤0.0013	40.5	49	1.0	45
30uF	≤0.001	30.5	46	1.0	45	55uF	≤0.0013	42	49	1.0	45
33uF	≤0.001	32	46	1.0	45	56uF	≤0.0013	42.5	49	1.0	45
36uF	≤0.0011	33	46	1.0	45	62uF	≤0.0014	39.5	59	1.0	45
39uF	≤0.0011	34.5	46	1.0	45	68uF	≤0.0014	41.5	59	1.0	45
41uF	≤0.0012	35.5	46	1.0	45	75uF	≤0.0014	43.5	59	1.0	45
43uF	≤0.0012	36	46	1.0	45	82uF	≤0.0014	45	59	1.0	45
45uF	≤0.0012	37	46	1.0	45	91uF	≤0.0014	47.5	59	1.2	45
47uF	≤0.0012	39	48	1.0	45	100uF	≤0.0014	49.5	59	1.2	45
50uF	≤0.0013	40	49	1.0	45	--	--	--	--	--	--

μF	400V					μF	400V				
	Dissipation	ΦD	L	d	LL		Dissipation	ΦD	L	d	LL
1.0uF	≤0.0005	13	21	0.8	25	7.0uF	≤0.0007	24	31	1.0	35
1.1uF	≤0.0005	13.5	21	0.8	25	7.5uF	≤0.0007	25.5	31	1.0	35
1.2uF	≤0.0005	14.5	21	0.8	25	8.0uF	≤0.0007	22.5	36	1.0	35
1.3uF	≤0.0005	12.5	26	0.8	25	8.2uF	≤0.0007	23	36	1.0	35
1.5uF	≤0.0005	13.5	26	0.8	25	9.1uF	≤0.0007	24.5	36	1.0	35
1.6uF	≤0.0005	14	26	0.8	25	10uF	≤0.0007	25.5	36	1.0	35
1.8uF	≤0.0005	14.5	26	0.8	25	11uF	≤0.0007	27	36	1.0	35
2.0uF	≤0.0005	15	26	0.8	30	12uF	≤0.0008	27.5	36	1.0	35
2.2uF	≤0.0005	16	26	0.8	30	13uF	≤0.0008	25	46	1.0	40
2.4uF	≤0.0005	16.5	26	0.8	30	14uF	≤0.0008	26	46	1.0	40
2.5uF	≤0.0005	17	26	0.8	30	15uF	≤0.0008	26	46	1.0	40
2.7uF	≤0.0005	17.5	26	0.8	30	16uF	≤0.0008	28.5	46	1.0	40
3.0uF	≤0.0005	18.5	26	0.8	30	18uF	≤0.0008	30	46	1.0	45
3.3uF	≤0.0006	19	26	0.8	35	20uF	≤0.0008	31.5	46	1.0	45
3.5uF	≤0.0006	17.5	31	0.8	35	22uF	≤0.0009	32	46	1.0	45
3.6uF	≤0.0006	17.5	31	0.8	35	24uF	≤0.0009	33.5	46	1.0	45
3.9uF	≤0.0006	18	31	0.8	35	27uF	≤0.0009	35.5	46	1.0	45
4.0uF	≤0.0006	18.5	31	0.8	35	28uF	≤0.0009	36	46	1.0	45
4.3uF	≤0.0006	19	31	0.8	35	30uF	≤0.001	37	46	1.0	45
4.5uF	≤0.0006	19.5	31	0.8	35	33uF	≤0.001	40	49	1.0	45
4.7uF	≤0.0006	19.5	31	0.8	35	36uF	≤0.0011	41.5	49	1.0	45
5.0uF	≤0.0006	20.5	31	1.0	35	39uF	≤0.0011	38.5	59	1.0	45
5.1uF	≤0.0006	20.5	31	1.0	35	41uF	≤0.0012	39.5	59	1.0	45
5.6uF	≤0.0006	22.5	31	1.0	35	43uF	≤0.0012	40	59	1.0	45
6.0uF	≤0.0006	22	31	1.0	35	45uF	≤0.0012	41	59	1.0	45
6.2uF	≤0.0006	22.5	31	1.0	35	47uF	≤0.0012	42	59	1.0	45
6.8uF	≤0.0007	24	31	1.0	35	--	--	--	--	--	--

## Premium Metallized Polypropylene Film Capacitors – Axial – JFX

μF	630V					μF	630V				
	Dissipation	ΦD	L	d	LL		Dissipation	ΦD	L	d	LL
1.0uF	≤0.0005	17	26	0.8	25	5.0uF	≤0.0006	32	36	1.0	35
1.1uF	≤0.0005	18	26	0.8	25	5.1uF	≤0.0006	29	36	1.0	35
1.2uF	≤0.0005	18.5	26	0.8	25	5.6uF	≤0.0006	30.5	36	1.0	35
1.3uF	≤0.0005	19.5	26	0.8	25	6.0uF	≤0.0007	31.5	36	1.0	35
1.5uF	≤0.0005	21	26	1.0	25	6.2uF	≤0.0007	32	36	1.0	35
1.6uF	≤0.0005	21.5	26	1.0	25	6.8uF	≤0.0007	33.5	36	1.0	35
1.8uF	≤0.0005	22.5	26	1.0	25	7.0uF	≤0.0007	34	36	1.0	35
2.0uF	≤0.0005	21	31	1.0	30	7.5uF	≤0.0007	35	36	1.0	35
2.2uF	≤0.0005	22	31	1.0	30	8.0uF	≤0.0007	31	46	1.0	40
2.4uF	≤0.0005	23	31	1.0	30	8.2uF	≤0.0007	31.5	46	1.0	40
2.5uF	≤0.0005	23	31	1.0	30	9.1uF	≤0.0007	33	46	1.0	40
2.7uF	≤0.0006	24	31	1.0	30	10.0uF	≤0.0007	34.5	46	1.2	40
3.0uF	≤0.0006	25	31	1.0	30	11.0uF	≤0.0007	36	46	1.2	40
3.3uF	≤0.0006	26.5	31	1.0	35	12.0uF	≤0.0008	38.5	46	1.2	40
3.5uF	≤0.0006	27	31	1.0	35	13.0uF	≤0.0008	40	49	1.2	40
3.6uF	≤0.0006	27.5	31	1.0	35	14.0uF	≤0.0008	37	59	1.2	45
3.9uF	≤0.0006	26	36	1.0	35	15.0uF	≤0.0008	38	59	1.2	45
4.0uF	≤0.0006	26	36	1.0	35	16.0uF	≤0.0008	39	59	1.2	45
4.3uF	≤0.0006	27	36	1.0	35	18.0uF	≤0.0008	41.5	59	1.2	45
4.5uF	≤0.0006	27.5	36	1.0	35	20.0uF	≤0.0008	43.5	59	1.2	45
4.7uF	≤0.0006	28	36	1.0	35	--	--	--	--	--	--

Please visit our website to get more update data, those data & specification are subject to change without notice.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [jb](#) manufacturer:*

Other Similar products are found below :

[JFX02G225J000000B](#) [JSX-82U/250-5%](#) [JFX02E126J000000B](#) [JFX02G106J000000B](#) [JFX02E226J000000B](#) [JFX02E825J000000B](#)  
[JFX02E686J000000B](#) [JFX02G475J000000B](#) [JFX02E626J000000B](#) [JSX-68U/250-5%](#) [JFX02E107J000000B](#) [JFX02E167J000000B](#) [JSX-](#)  
[22U/250-5%](#) [JFX02G334J000000B](#) [JFX02G825J000000B](#) [JFX02G685J000000B](#) [JSX-100U/250-5%](#) [JSX-6.8U/250-5%](#)  
[JFX02E826J000000B](#) [JFX02G206J000000B](#) [JFX02E476J000000B](#) [JFX02E684J000000B](#) [JFX02E756J000000B](#) [JFX02E435J000000B](#) [JSX-](#)  
[33U/250-5%](#) [JFX02G155J000000B](#) [JFX02E474J000000B](#) [JFX02E566J000000B](#) [JFX02E405J000000B](#) [JFX02E475J000000B](#)  
[JFX02E506J000000B](#) [JFX02E166J000000B](#) [JFX02E755J000000B](#) [JYAA4331KDB075000B](#) [JSX-3.3U/250-5%](#) [JFX02E336J000000B](#)  
[JFX02E306J000000B](#) [JSX-8.2U/250-5%](#) [JSX-47U/250-5%](#) [JFZ-100N/310-P10](#) [JSX-5,6U/250-5%](#) [JFX02E186J000000B](#)  
[JFX02E334J000000B](#) [JFX02G166J000000B](#) [JFX02E416J000000B](#) [JFX02G126J000000B](#) [JFX02E276J000000B](#) [JFX02E156J000000B](#)  
[JFX02G156J000000B](#) [JFX02G186J000000B](#)