


| | |
|-------------|-----------------|
| CUSTOMER | MCM |
| PRODUCT NO. | 24-120** series |

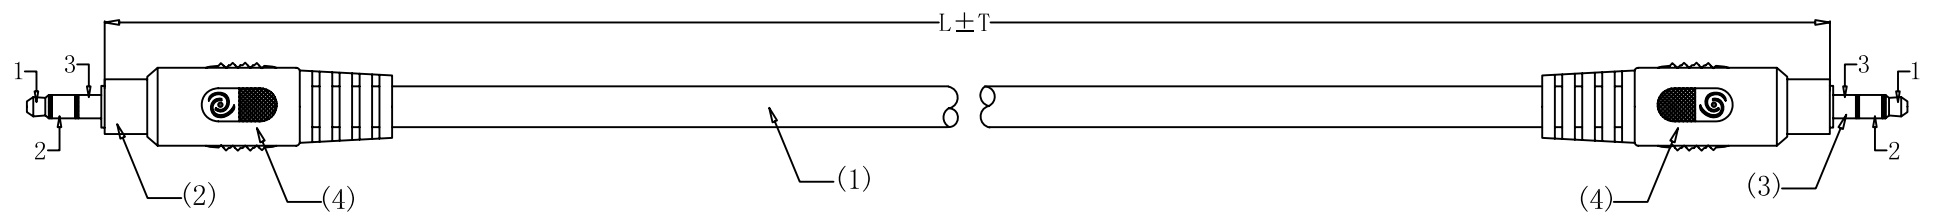

SIDE:A

SIDE:B

| | | | | | | |
|---------------|----------------|----------|----------|----------|----------|----------------|
| CUSTOMER P/N | 24-12050 | 24-12051 | 24-12052 | 24-12053 | 24-12054 | 24-12055 |
| L±T(MM) | 460±10 | 920±10 | 1830±20 | 3660±20 | 7620±40 | 15240±100 |
| Tie(MM) | 60MM | 80MM | 110MM | 130MM | 160MM | PE film 600MM |
| Winding ø(MM) | 100±15 | | 120±15 | | 140±15 | 170±15 |
| MCM Nylon bag | 200*270*0.06MM | | | | | 270*350*0.06MM |

NOTE:

(1).Cable Spec: SLV Series AUDIO/VIDEO Interconnect Cable[(10/0.12BC)*2C(WHITE/RED)+S(32/0.10BC)]
 Jacket Material:PVC OD:4.0mm
 Cable Colour: Cool Grey 11C
 Cable Printing:SLV Series AUDIO/VIDEO Interconnect Cable www.stellarlabs.com


(2).Connector A: 3.5mm Male Solder Type
 INSULATION:Black
 CONTACTS:Nickel Plated

(3).Connector B: 3.5mm Male Solder Type
 INSULATION:Black
 CONTACTS:Nickel Plated

(4).Over Mold: PVC-45P-Cool Grey 11C


(5).Parameter Settings: CT-8681FA
 1. Conductive Resistance:1.0Ω
 2. Insulative Resistance:5MΩ (Min.)
 3. Hi-Pot:300V/AC、DC , 1.5mA/I , 50Hz , 0.03s

(6).100% OPEN, SHORT&MISWIRE TEST;
 (7).ALL MATERIALS MUST BE IN LINE WITH RoHS.
 (8).Packing:Nylon bag+label

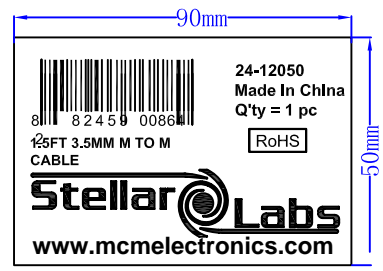

- 24-12051 3FT Bar Code:8 82459 00865 9
- 24-12052 6FT Bar Code:8 82459 00866 6
- 24-12053 12FT Bar Code:8 82459 00867 3
- 24-12054 25FT Bar Code:8 82459 00868 0
- 24-12055 50FT Bar Code:8 82459 00869 7

| | | | |
|---------------|-------|---------------|--|
| <u>SIDE:A</u> | | <u>SIDE:B</u> | |
| ø3.5 PLUG | | ø3.5 PLUG | |
| 1 | WHITE | 1 | |
| 2 | RED | 2 | |
| 3 | F | 3 | |

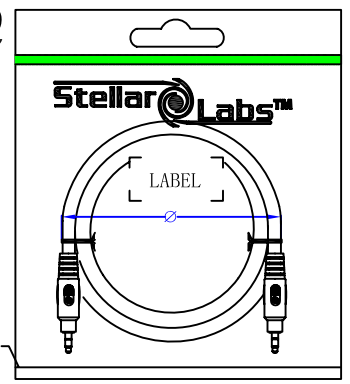

PIN OUT: (5)

PACKING : (8)

| | | | | | | | | | | |
|-----|-------------|------------|---------------------------------------|--|-------------------------------|----------|------------|-----------|---------|------------------|
| | | | GENERAL TOLERANCES (UNLESS SPECIFIED) | | MCM Electronics | | | | | |
| | | | | | www.mcmelectronics.com | | | | | |
| | | | LENGTH: X. ±1 .X±0.2 .XX±0.10 | | UNIT:mm | REV:0/A | | | NAME | AUDIO CABLE |
| | | | ANGLE: X° . ±1° .X° ±0° 30' | | DRAWING | XIAODENG | 2014/04/04 | S. P. NO. | HT-5762 | DC3.5 Stereo M/M |
| 0 | NEW | 2014/04/04 | | | CHECK | | | P. O. NO. | | DWG. NO. |
| REV | DESCRIPTION | DATE | | | APPROVE | | | SIZE | | PAGE |
| | | | | | | | | | | 1/1 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [STELLAR LABS](#) manufacturer:

Other Similar products are found below :

[24-15099](#) [24-16210](#) [24-16211](#) [24-10220](#) [JR8306A-3M](#) [555-13890](#) [83-9962](#) [24-15450](#) [24-15453](#) [24-16053](#) [24-16063](#) [24-16135](#) [24-16147](#)
[24-15452](#) [24-15455](#) [24-15942](#) [24-15984](#) [24-15989](#) [24-16012](#) [24-16049](#) [24-833](#) [24-1810](#) [83-16411](#) [10DV-07203-R](#) [24-15411](#) [24-15435](#) [24-15456](#) [24-15396](#) [24-15061](#) [24-15053](#) [24-15085](#) [24-15158](#) [24-15951](#) [24-15959](#) [24-16041](#) [24-16058](#) [24-16145](#) [24-1850](#) [24-1830](#) [24-1855](#)
[83-12261](#) [24-12307](#) [24-15418](#) [33-10915](#) [24-10271](#) [24-15413](#) [24-15417](#) [24-15433](#) [24-15439](#) [24-15393](#)