


SIDE:B

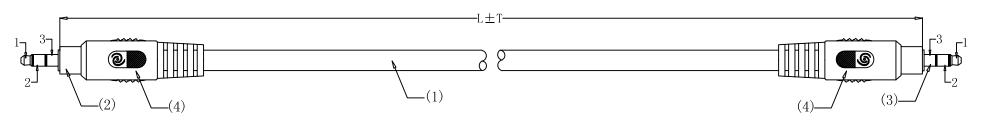

SIDE: A

		·				
CUSTOMER P/N	24-12050	24-12051	24-12052	24-12053	24-12054	24-12055
$L \pm T (MM)$	460 ± 10	920 ± 10	1830 ± 20	3660 ± 20	7620 ± 40	15240 ± 100
Tie(MM)	60MM	80MM	110MM	130MM	160MM	PE film 600MM
Winding ∅(MM)	100 ± 15		120 ± 15		140±15	170 ± 15
MCM Nylon bag	200*270*0.06MM					270*350*0.06MM

NOTE:

(1). Cable Spec: SLV Series AUDIO/VIDEO Interconnect

Cable[(10/0.12BC)*2C(WHITE/RED)+

S(32/0.10BC)

Jacket Material:PVC OD:4.0mm Cable Colour: Cool Grey 11C

Cable Printing:SLV Series AUDIO/VIDEO

Interconnect Cable www.stellarlabs.com

(2). Connector A: 3.5mm Male Solder Type INSULATION: Black

CONTACTS: Nickel Plated

(3). Connector B: 3.5mm Male Solder Type

INSULATION: Black

CONTACTS: Nickel Plated

- (4). Over Mold: PVC-45P-Cool Grey 11C
- (5). Parameter Settings: CT-8681FA
 - 1. Conductive Resistance: 1.0 Ω
 - 2. Insulative Resistance: $5M\Omega$ (Min.)
 - 3. Hi-Pot: 300V/AC, DC, 1.5mA/I, 50Hz, 0.03s
- (6). 100% OPEN, SHORT&MISWIRE TEST:
- (7). ALL MATERIALS MUST BE IN LINE WITH ROHS.
- (8). Packing: Nylon bag+label


0	NEW	2014/04/04
REV	DESCRIPTION	DATE



24-12051 3FT Bar Code: 8 82459 00865 9 24-12052 6FT Bar Code: 8 82459 00866 6 24-12053 12FT Bar Code: 8 82459 00867 3 24-12054 25FT Bar Code:8 82459 00868 0 24-12055 50FT Bar Code: 8 82459 00869 7

m	SIDE:A		SIDE:B
	Ø3.5 PLUG	WHITE	Ø3.5 PLUG
	l I ———	"1111111	——— l
	2	RED	
	2	F	2
	ა ——		 ა

Heat sealing



PACKING: (8)

PIN OUT: (5)

GENERAL TOLERANCES				MCM Electronics					
(UNLESS SPECIFIED)	,			r	www.mcmelectronics.com				
LENGTH: X. ± 1 . $X \pm 0$. 2	UNIT:	:mm REV		:0/A		\bigcirc	NAME	AUDIO CABLE	
$\begin{array}{c} 1.0.2 \\ 1.00.2 \\ 1.00.10 \end{array}$	DRAWING	XIAODE	NG 20	14/04/04	S. P. NO.	HT-5762	TVIIIL	DC3.5 Stereo M/M	
ANGLE: X°.±1°	СНЕСК				P. O. NO.		DWG. NO.		
. X° ±0° 30'	APPROVE				SIZE		PAGE	1/1	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for STELLAR LABS manufacturer:

Other Similar products are found below:

24-15099 24-16210 24-16211 24-10220 JR8306A-3M 555-13890 83-9962 24-15450 24-15453 24-16053 24-16063 24-16135 24-16147
24-15452 24-15455 24-15942 24-15984 24-15989 24-16012 24-16049 24-833 24-1810 83-16411 10DV-07203-R 24-15411 24-15435 2415456 24-15396 24-15061 24-15053 24-15085 24-15158 24-15951 24-15959 24-16041 24-16058 24-16145 24-1850 24-1830 24-1855
83-12261 24-12307 24-15418 33-10915 24-10271 24-15413 24-15417 24-15433 24-15439 24-15393