


# CABLE SPECIFICATION

SPEC NO. : RG6/U SIAMESE COAXIAL CABLE

Customer No. 24-10245

Construction Item		Unit	Construction Item
Conductors	Construction	mm	1/1.02±0.05
	Material	---	CU
	Filler Material	---	---
	O. D.	mm	1.02±0.05
Insulators	Material	---	Foamed PE
	Diameter	mm	4.57±0.01
	Average Thickness	mm	1.77±0.05
	Colour	---	White
Outer Conductors	AL-PET Foil	um	AL-P-AL
	Type	---	Braid
	Material	---	ALMG
	Coverage	%	60%
	Diameter	mm	4.80±0.15
Jacket	Material	---	PVC (CM)
	Diameter	mm	6.9±0.15
	Average Thickness	mm	1.0±0.10
	Extrusion	---	---
	Surface	---	---
	Colour	---	Black
Power Wire	Construction	mm	16*0.254CU
	Diameter	mm	3.2PVC
Inking	Inking Colour	---	White
	Inking	---	Stellar Labs SIAMESE RG6/U TYPE COAX 75OHM 18AWG 75degC 2250MHz +2C18 E188601 (UL) CM RoHS COMPLIANT
Line	Length	ft	500

**CONFIGURATION:**

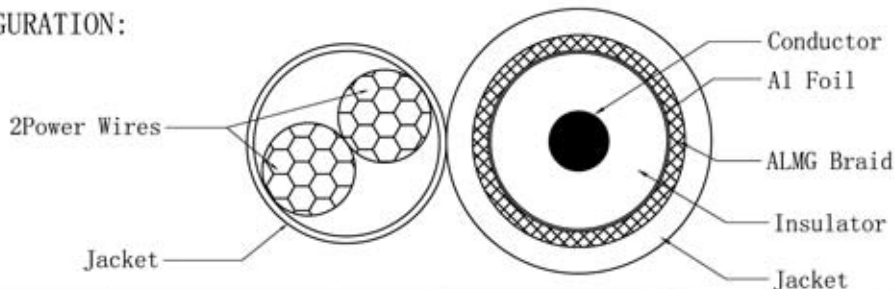

GENERAL TOLERANCES  
(UNLESS SPECIFIED)

LENGTH: X ± 1  
.X ± 0.2  
.XX ± 0.10  
ANGLE: X° ± 1°  
.X° ± 0° 30'



UNIT:mm	REV:	↔ ⊕	NAME	RG6/U SIAMESE COAXIAL CABLE
DRAWING	XIAOSHENG	2008/10/07	S. P. NO.	
CHECK			P. O. NO.	
APPROVE			SIZE	
			NAME	
			DWG. NO.	
			PAGE	1/1

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [STELLAR LABS](#) manufacturer:*

Other Similar products are found below :

[24-15099](#) [24-16210](#) [24-16211](#) [24-10220](#) [JR8306A-3M](#) [555-13890](#) [83-9962](#) [24-15450](#) [24-15453](#) [24-16053](#) [24-16063](#) [24-16135](#) [24-16147](#)  
[24-15452](#) [24-15455](#) [24-15942](#) [24-15984](#) [24-15989](#) [24-16012](#) [24-16049](#) [24-833](#) [24-1810](#) [83-16411](#) [10DV-07203-R](#) [24-15411](#) [24-15435](#) [24-15456](#) [24-15396](#) [24-15061](#) [24-15053](#) [24-15085](#) [24-15158](#) [24-15951](#) [24-15959](#) [24-16041](#) [24-16058](#) [24-16145](#) [24-1850](#) [24-1830](#) [24-1855](#)  
[83-12261](#) [24-12307](#) [24-15418](#) [33-10915](#) [24-10271](#) [24-15413](#) [24-15417](#) [24-15433](#) [24-15439](#) [24-15393](#)