


CABLE SPECIFICATION

SPEC NO. : RG6/U SIAMESE CCS COAXIAL CABLE

Customer No. 24-10251

| Construction Item | | Unit | Construction Item |
|-------------------|-------------------|------|--|
| Conductors | Construction | mm | 1/1.02±0.05 |
| | Material | --- | CCS |
| | Filler Material | --- | --- |
| | O. D. | mm | 1.02±0.05 |
| Insulators | Material | --- | Foamed PE |
| | Diameter | mm | 4.57±0.01 |
| | Average Thickness | mm | 1.77±0.05 |
| | Colour | --- | White |
| Outer Conductors | AL-PET Foil | um | AL-P-AL |
| | Type | --- | Braid |
| | Material | --- | ALMG |
| | Coverage | % | 60% |
| | Diameter | mm | 4.80±0.15 |
| Jacket | Material | --- | PVC (CM) |
| | Diameter | mm | 6.9±0.15 |
| | Average Thickness | mm | 1.0±0.10 |
| | Extrusion | --- | --- |
| | Surface | --- | --- |
| | Colour | --- | White |
| Power Wire | Construction | mm | 16*0.254CU |
| | Diameter | mm | 3.2PVC |
| Inking | Inking Colour | --- | Black |
| | Inking | --- | Stellar Labs SIAMESE RG6/U TYPE COAX 75OHM 18AWG 75degC 2250MHz +2C18 E188601 (UL) CM RoHS COMPLIANT |
| Line | Length | ft | 1000 |

CONFIGURATION:

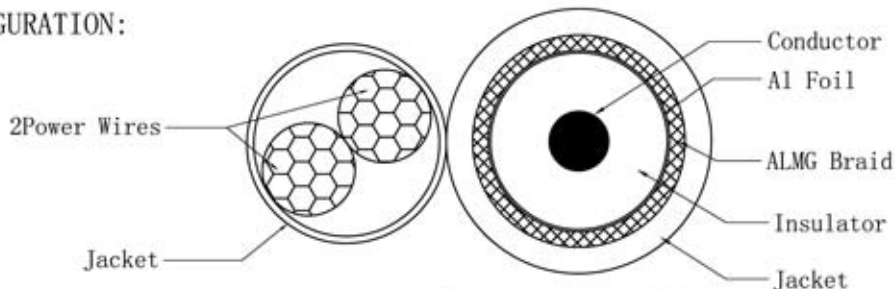

GENERAL TOLERANCES
(UNLESS SPECIFIED)

LENGTH: X ± 1
 .X ± 0.2
 .XX ± 0.10
 ANGLE: X° ± 1°
 .X° ± 0° 30'



| | | | | |
|---------|-----------|------------|-----------|---------------------------------|
| UNIT:mm | REV: | | NAME | RG6/U SIAMESE CCS COAXIAL CABLE |
| DRAWING | XIAOSHENG | 2008/10/07 | S. P. NO. | |
| CHECK | | | P. O. NO. | DWG. NO. |
| APPROVE | | | SIZE | PAGE |
| | | | | 1/1 |

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [STELLAR LABS](#) manufacturer:

Other Similar products are found below :

[24-15099](#) [24-16210](#) [24-16211](#) [24-10220](#) [JR8306A-3M](#) [555-13890](#) [83-9962](#) [24-15450](#) [24-15453](#) [24-16053](#) [24-16063](#) [24-16135](#) [24-16147](#)
[24-15452](#) [24-15455](#) [24-15942](#) [24-15984](#) [24-15989](#) [24-16012](#) [24-16049](#) [24-833](#) [24-1810](#) [83-16411](#) [10DV-07203-R](#) [24-15411](#) [24-15435](#) [24-15456](#) [24-15396](#) [24-15061](#) [24-15053](#) [24-15085](#) [24-15158](#) [24-15951](#) [24-15959](#) [24-16041](#) [24-16058](#) [24-16145](#) [24-1850](#) [24-1830](#) [24-1855](#)
[83-12261](#) [24-12307](#) [24-15418](#) [33-10915](#) [24-10271](#) [24-15413](#) [24-15417](#) [24-15433](#) [24-15439](#) [24-15393](#)