

Installation Manual


MODEL:50-16615

- *2-Way Coaxial Speaker System
- *New Molded Woven Cone with Rubber Edge
- *Directable 1" Titanium Dome Tweeter
- *High-strength ABS plastic Ceiling Frame
- *Power:80 Watts Max
- *Frequency Range: 80Hz ~ 20KHz
- *SPL(1W/1M): 93 dB
- *Impedance:8 Ohm
- *Magnet Weight:10 Oz
- * Overall Frame Diameter: 9"
- * Cutout Diameter: 7.75"
- * Mounting Depth: 2.9"




MCM Custom Audio
Division of MCM Electronics
650 Congress Park Drive
Centerville, Ohio 45459
www.mcmelectronics.com

Installation Guide




Cut the drywall.


Note:Always allow at least one—half inch between a wall stud and the speaker cutout or the locking tabs will not be able to swivel into place.



Connect the speaker wires to the speaker.



Screw down each of the four Phillips head screws. The locking tabs will swivel into place and secure the unit to the rear surface of the drywall. Put in the strips of adhesive to secure the grille.



© 2010 MCM a Premier Farnell Company


Replace the metal grille.




Installation Manual




MODEL:50-16615
2-Way Coaxial Speaker System



Bluetooth Device Name: MCM
Bluetooth Password: MCMAU



Wiring instructions

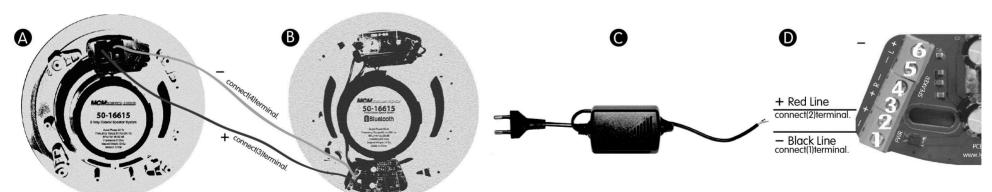

In picture A the ceiling speaker is without bluetooth,in picture B the ceiling speaker with bluetooth,in picture C is the adapter,in picture D is the bluetooth connection enlargement. As the picture showed(1),(2)the terminal connect with the adapter, pay attention to the positive and negtive connection, the adapter in Red wire is the positive connection.(2)Terminal, adapter black wire is the negative, to connect(1)terminal.(3)The terminal connect picture A positive pole, that A is without bluetooth ceiling speaker.(4)The terminal connect to picture A the nagtive pole, that A is without BT ceiling speaker.Installation done.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for MCM manufacturer:

Other Similar products are found below:

NWTBATCAPMB13 25-020 27-505 27-4155 27-840 28-0755 28-5958 50-10820 37-330 PI-UPTIMEUPS 27-5918 27-5977 12-3410 286023 55-3230 35SPS-3 28-6008 22-26180 17705 55-5675 27-6020 24-12352 21-7655 28-6017 53-1230 28-5965 21-18966 22-1640 274200 83-17607 27-5833 27-5925 24-12344 12-3404 PCM-2100-50 21-19004 28-6080 22-665 24-1040 27-5917 28-6005 55-5670
HD15MM35N-100F 21-4605 21-12825 24-5360 27-4270 27-5940 27-5949 27-6112