

Description

- The IQRB-1 rubidium oscillator is a sub-miniature atomic clock exhibiting normal rubidium oscillator performance in a 65cc OCXO style package. This rubidium oscillator has 100 times less drift than OCXOs and with short term stability of 0.008ppb/s at 100s, this rubidium oscillator provides significant improvements in performance over OCXOs.
- Model IQRB-1
- Model Issue number 2

Frequency Parameters

- Frequency 10.0MHz
- Frequency Tolerance ± 0.05 ppb
- Tolerance Condition @ 25°C
- Frequency Stability ± 0.50 ppb
- Operating Temperature Range -30.00 to 65.00°C
- Short Term Stability (AVAR):
 - 1s 0.08ppb
 - 10s 0.03ppb
 - 100s 0.008ppb
- Ageing:
 - Day 0.005ppb
 - Month 0.05ppb
- Magnetic Field Sensitivity, DC (± 2 Gauss): ± 0.04 ppb/Gauss max
- Temperature Coefficient (ambient): 5×10^{-10} (0 to 50°C)
- Retrace: ± 0.02 ppb max

Electrical Parameters

- Supply Voltage 12.0V
- Note: The device will operate over the Supply Voltage Range 12V to 18V.
- Input Power (@ 25°C): 6W @ 12V, 1.2A max.
- Warm Up Time: 5mins to lock @ 25°C.
- Lock Monitor: Pin 2 is high (5V) when out of lock and low (0V) when locked.

Frequency Adjustment


- Pulling ± 5 ppb min
- Control Voltage 2.5V ± 2.5 V
- Input Impedance 10k Ω min
- Control Voltage Input Current (Pin 1 swept from 0V to 5V): 40uA typ
- Control Voltage Input Capacitance (Pin 1): 5pF typ
- Note: The oscillator will detect if no control voltage is applied to Pin 1 and will automatically set the control voltage internally to 2.5V. Further when the oscillator is locked Pin 1 (frequency control) is set to internal default voltage 2.5V. However if a voltage is applied (even GND) to Pin 1 then the oscillator will switch to accept an external control voltage input.

Output Details

- Output Compatibility Sine
- Drive Capability 50 Ω
- Output Levels: 7dBm min, 9.5dBm typ, 13dBm max



Outline (mm)

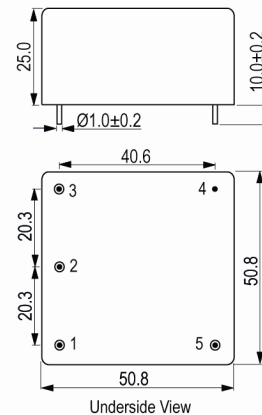

- Pin Connections
1. Frequency Control
 2. Lock Monitor
 3. Output
 4. GND
 5. +Vs

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: 0800 1808 443

France: 0800 901 383
USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com

Noise Parameters

- Phase Noise (typ):
 - 67dBc/Hz @ 1Hz
 - 95dBc/Hz @ 10Hz
 - 127dBc/Hz @ 100Hz
 - 140dBc/Hz @ 1kHz
- Harmonics: -40dBc max

Environmental Parameters

- Storage Temperature Range: -55 to 85°C
- Base Plate Temperature: -30 to 85°C
- Case Temperature (after 1hr, ambient temp 25°C, no ventilation): 45°C max
- Mechanical Shock: IEC 60068-2-27, Test Ea: Acceleration of 50G peak amplitude for 11ms duration.
- Vibration: IEC 60068-2-06, Test Fc: 10Hz-55Hz 1.5mm displacement, 55Hz-500Hz 10G acceleration.
- Atmospheric Pressure: -60m to 4000m: 1×10^{-13} mbar max
- EMI: Compliant to FCC Part 15, Class B.

Manufacturing Details

- MTBF (Stationary): Approx 100000hrs
- Note: In regard to PCB layout; the oscillator base plate runs hot and it is not a good idea to place components on the opposite side of the PCB to the rubidium module as the base plate can be 85°C depending upon environmental conditions. We recommend leaving about a 5mm minimum gap around the rubidium module wherever possible.

Compliance

- | | |
|-----------------------------|----------------|
| RoHS Status (2011/65/EU) | Compliant |
| REACH Status | Non-Compliant |
| MSL Rating (JEDEC-STD-033): | Not Applicable |

Packaging Details

- Pack Style: Bulk Bulk pack
Pack Size: 1
- Alternative packing option available*

Technical Notes

- RoHS Compliance: 5/6*

Sales Office Contact Details:

UK: +44 (0)1460 270200
Germany: 0800 1808 443

France: 0800 901 383
USA: +1.760.318.2824

Email: info@iqdfrequencyproducts.com
Web: www.iqdfrequencyproducts.com

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for IQD manufacturer:

Other Similar products are found below :

[LFOCXO063803BULK](#) [LFSPXO056242CUTT](#) [LFMCXO063767BULK](#) [LFMCXO063773BULK](#) [LFOCXO063809BULK](#)
[LFTCXO063709BULK](#) [LFTCXO063710BULK](#) [LFTCXO063779BULK](#) [LFTCXO063781BULK](#) [LFTCXO070028Cutt](#)
[LFTVXO063701BULK](#) [LFTVXO063702BULK](#) [LFTVXO063703BULK](#) [LFTVXO063707BULK](#) [LFTVXO063791BULK](#) [LFXTAL003215](#)
[LFMCXO063766BULK](#) [LFMCXO063771BULK](#) [LFOCXO063816BULK](#) [LFTCXO063713BULK](#) [LFTCXO063714BULK](#)
[LFTCXO063716BULK](#) [LFTVXO063704BULK](#) [LFTVXO063705BULK](#) [LFTVXO063706BULK](#) [LFTVXO063789BULK](#)
[LFTVXO063790BULK](#) [LFOCXO063809](#) [LFSPXO009581](#) [LFTCXO063784](#) [LFTVXO063786](#) [SPXO009437-CFPS-73](#) [LFSPXO009686Bulk](#)
[LFSPXO023543Bulk](#) [LFOCXO067293Bulk](#) [LFMISC075710Bulk](#) [LFSPXO076024Cutt](#) [LFMCXO064079BULK](#) [LFOCXO067293](#)
[LFMCXO064077BULK](#) [LFTVXO063785BULK](#) [LFXTAL012312BULK](#) [LFTCXO063780BULK](#) [LFXTAL003224](#) [LFSPXO009592CUTT](#)
[LFPTXO000295Bulk](#) [LFMISC070550Bulk](#) [LFOCXO063802BULK](#) [LFMCXO064080BULK](#) [LFSPXO009615Bulk](#)