Rugged Pipe Plug Thermocouple Probe





Single element thermocouple.


TC-(*)-NPT Series



- Rugged 304 SS Design with Strain Relief Spring
- ✓ Single and Dual Elements
- ✓ ¼ or ¼ NPT Mounting Thread
- ✓ 2 m (80") Stainless Steel Braid Over Fiberglass Lead Wire
- 20 AWG, Stranded for ¼ NPT 24 AWG, Stranded for ¼ NPT Stainless Steel Overbraid–Resists Abrasions and Cuts, Yet Remains Flexible
- Withstands Pressures to 2500 psi at Ambient Temperatures
- Grounded and Ungrounded Junction Is Ideal For Vessel Application, Pressurized Chambers and Pipelines
- Exposed Junction Designed For Air Temperature Measurement and Monitoring of Gas Streams
- Stripped Leads Standard SMPW Connectors, Optional
- Choice J, K, T or E Thermocouple Types
- Grounded, Ungrounded or Exposed Junctions
- Special Custom Designs Having Different NPT Threads, Tip Diameters or Tip Lengths are Also Available
- ✓ Flush Tip Available, Consult Custom Engineering
- ✓ Probe Temperature Range to 650°C (1200°F)
- ✓ Transition Joint/Cable Temperature Range to 480°C (900°F)

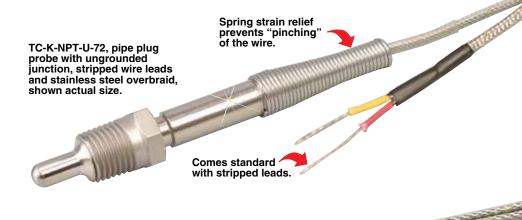

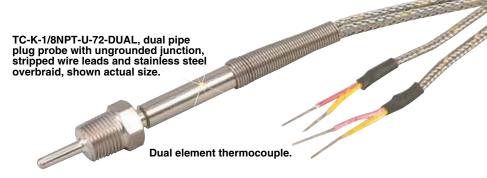

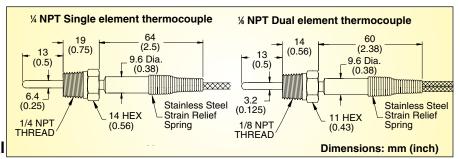

| To Order | |
|-----------------|---------------------------------|
| Mounting Thread | Model No. |
| 1/4 | TC-(*)-NPT-(**)-72 |
| | TC-(*)-1/4 NPT-(**)-72-DUAL |
| | TC-(*)-1/4 NPT-(**)-72-SMP-DUAL |
| | TC-(*)-1/4 NPT-(**)-72-SMP-DUAL |
| 1/8 | TC-(*)-1/8 NPT-(**)-72 |
| | TC-(*)-1/8 NPT-(**)-72-DUAL |
| | TC-(*)-1/8 NPT-(**)-72-SMP |
| | TC-(*)-1/8 NPT-(**)-72-SMP-DUAL |

^{*} Specify calibration: J, K, T or E.

For lead wire length over 2 m (80"), use additional price per 300 mm (12") increments and modify model number.

Ordering Example: TC-K-NPT-G-72, pipe plug style, Type K grounded junction thermocouple with ¼ NPT thread and 72" long extension leads.

^{**} Specify junction type: **G** (Grounded), **E** (Exposed), **U** (Ungrounded).

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Omega manufacturer:

Other Similar products are found below:

DPG409-100DWU OM-DAQXL-1-NA CASS-116U-12 DH-1-20-J-12 GG-J-24-SLE-1000 HPC-AU-P HPC-IR-P JMQSS-062U-6 KHSS-18G-RSC-12 KHXL-18G-RSC-12 KMQIN-125U-6 KMQXL-125G-12 KMQXL-125U-6 KQSS-18G-6 KQXL-14U-36 KQXL-18G-12 KQXL-18U-12 NB1-CAXL-14U-12 NB3-CAXL-14U-18 P-M-1/10-1/4-6-0-P-3 PX309-015A5V PX309-1KGI PX309-10KGV PX309-100AI PX309-100AV PX309-100GV PX309-3KG5V PX319-V050G5V PX319-005AI PX319-050A5V PX319-050GI PX319-10KGI PX319-10GV PX319-200AV PX319-200AV PX319-200A5V PX319-300G5V PX319-5KG5V PX319-500G5V PX319-500G5V PX319-500G5V PX319-500G5V PX319-500G5V PX319-500G5V PX319-500G5V PX319-500G5V PX319-500G5V PX319-300G5V PX319