


# Transition Adaptors

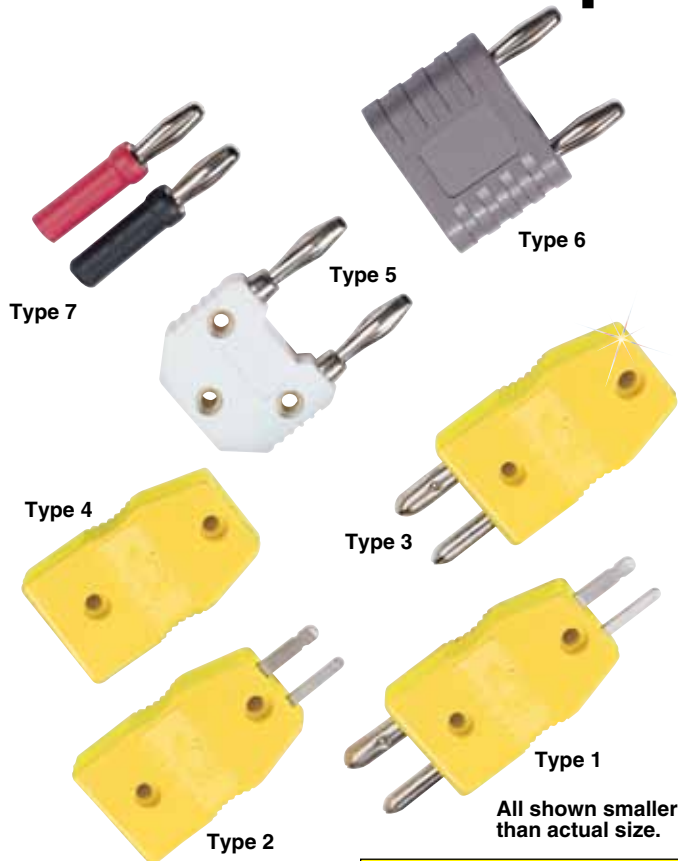

- ✓ Rugged, One-Piece Molded Construction
- ✓ ANSI or IEC<sup>†</sup> Color-Coded
- ✓ For Use with a Variety of Meters and Probes

TAS adaptors provide quick and easy connections between standard and miniature connector systems. These color-coded units are available in all thermocouple calibrations including Tungsten-Rhenium alloys. Any combination of male and female contacts for miniature and standard positions of the adaptor are available. The TAS-U-5, TAS-U-6 and TAS-U-7 are only available in uncompensated calibration.

To Order	
Model No. ANSI Color Code	Description
TAS-(*)-1**	Male standard to male mini
TAS-(*)-2**	Female standard to male mini
TAS-(*)-3**	Male standard to female mini
TAS-(*)-4**	Female standard to female mini
TAS-U-5**	Male banana plug to female mini
TAS-U-6**	Sheathed banana plug to banana plug
TAS-U-7	Sheathed banana plug to banana plug set, rated 110°C (230°F) max temperature

\*\*Note: Minor discoloration of connector may occur between 150°C (302°F) and 180°C (356°F). Electrical properties are not affected.

For connector dimensions, please visit us online.

Discount Schedule	
1-10 .....	Net
11-49 .....	5%
50-99 .....	10%
100-999 .....	15%
1000-4999 .....	20%
5000 and over.....	25%

\*Specify Calibration: **J, K, T, E, R/S, N or U** (uncompensated). May be ordered with **G, C, or D** calibration, add an additional cost (models 1 and 3 not available).

†Add suffix “-IEC” for IEC color code.




Ordering Example: **TAS-K-2**, adaptor for Type K thermocouples with female connection on the standard end and male connection on the miniature end.

# Round Terminal Blocks

- ✓ ANSI or IEC<sup>†</sup> Color-Coded
- ✓ Allows Single or Dual Wire Pair Connection
- ✓ -29 to 180°C (-20 to 356°F) Temperature Rating
- ✓ Fits 1.5 to 6 mm (1/16 to 1/4") Probes, Tubes and Cable Sheaths
- ✓ Rugged Glass-Filled Nylon Terminal Block Construction


Terminal block diameter: 31.7 mm (1.25")  
thickness: 9.7 mm (0.38")

Shown actual size.

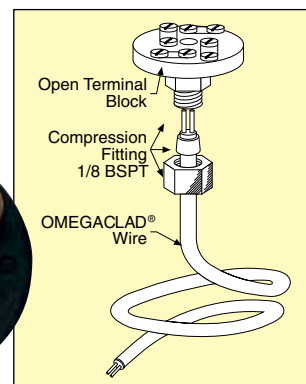

Note: Minor discoloration of block may occur between 150°C (302°F) and 180°C (356°F). Electrical properties are not affected.

OMEGA's color-coded CH series terminal blocks are designed to fit metal-sheathed cable or probes between 1.5 and 6 mm (1/16 and 1/4") in diameter. The CH terminal blocks use a 1/8 NPT compression fitting to adapt to probes or cables (sold separately).



Model No. ANSI Color Code	# Terminals
CH62-(*)	2
CH63-(*)	3
CH64-(*)	4

\* Insert calibration code: **J, K, T, E or S**, for thermocouple type desired, or **U** for uncompensated lugs.

†Add suffix “-IEC” for IEC color code.

Ordering Example: **CH62-K**, 2-position round terminal block, Type K.

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [Omega manufacturer](#):*

Other Similar products are found below :

[DPG409-100DWU](#) [OM-DAQXL-1-NA](#) [CASS-116U-12](#) [DH-1-20-J-12](#) [GG-J-24-SLE-1000](#) [HPC-AU-P](#) [HPC-IR-P](#) [JMQSS-062U-6](#) [KHSS-18G-RSC-12](#) [KHXL-18G-RSC-12](#) [KMQIN-125U-6](#) [KMQXL-125G-12](#) [KMQXL-125U-6](#) [KQSS-18G-6](#) [KQXL-14U-36](#) [KQXL-18G-12](#) [KQXL-18U-12](#) [NB1-CAXL-14U-12](#) [NB3-CAXL-14U-18](#) [P-M-1/10-1/4-6-0-P-3](#) [PX309-015A5V](#) [PX309-1KGI](#) [PX309-10KGV](#) [PX309-100AI](#) [PX309-100AV](#) [PX309-100GI](#) [PX309-100GV](#) [PX309-3KG5V](#) [PX319-V050G5V](#) [PX319-005AI](#) [PX319-050A5V](#) [PX319-050GI](#) [PX319-10KGI](#) [PX319-100GV](#) [PX319-2KGI](#) [PX319-200AV](#) [PX319-200A5V](#) [PX319-300G5V](#) [PX319-5KG5V](#) [PX319-500G5V](#) [PX319-7.5KGI](#) [PX319-7.5KG5V](#) [PX329-1KG5V](#) [PX329-10KGI](#) [PX329-2KGI](#) [PX409-015DWUI](#) [PX409-015VUSBH](#) [PX409-015VV](#) [PX409-050A5V](#) [PX409-10WDWU5V](#)