



Datenblatt - Fiche technique - Data sheet

11.02.8311




ROLINE USB 2.0 Kabel, USB 2.0 Typ Micro B - Typ A BU, OTG, 0,15 m




ROLINE Câble USB 2.0, USB A femelle - Micro USB B mâle, OTG, 0,15 m

ROLINE USB 2.0 Cable, A - Micro B, F/M, OTG, 0.15 m

A:150±20

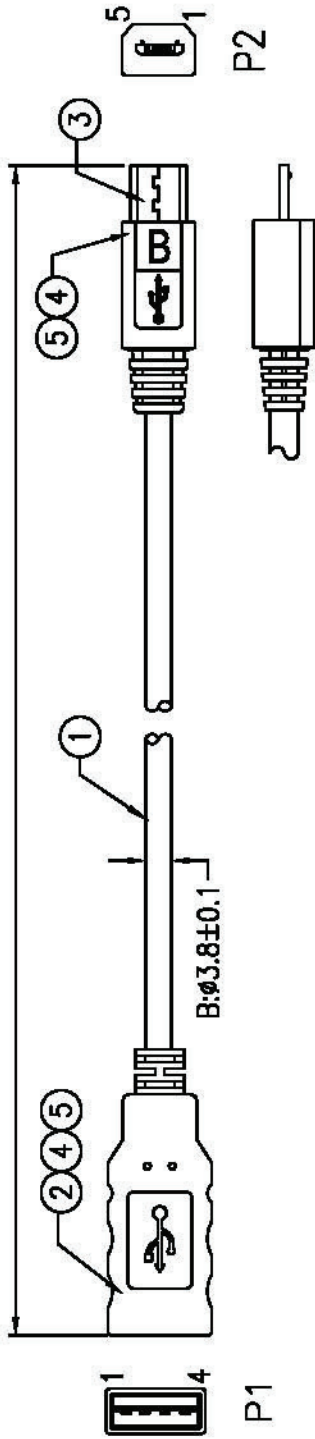

PINOUT:

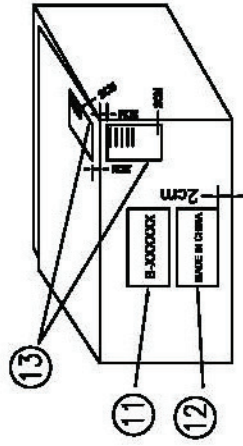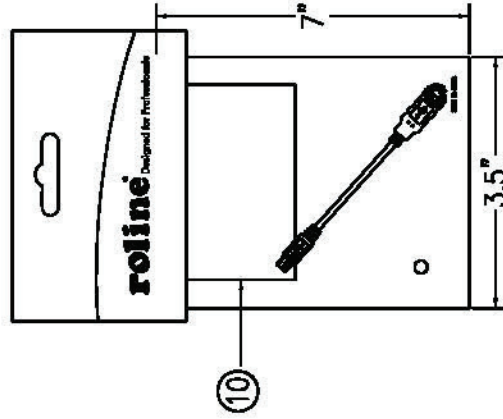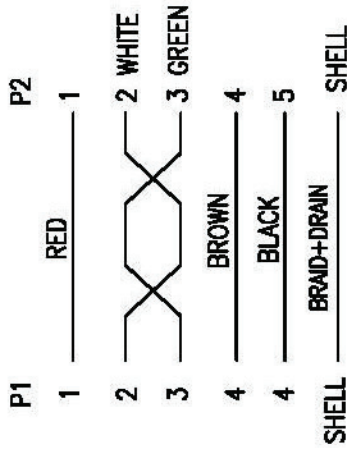

NOTES:

- 1) PRIMARY DIMENSION: A,B
- 2) P1 USB A Female
P2 USB Micro B Male
- 3) 30 AWG x 1 PR + 28 AWG x 3C
- 4) ROHS & REACH COMPLIANT
- 5) 1PC / PE BAG + ROLINE HEADER CARD

5	OUTER JACKET PVC 60Pa BLACK(1101)
4	INNER JACKET PE (RoHS)
3	MICRO USB B PLUG BLACK SOLDER TYPE TERMINAL PLATED GOLD 30U" (ROHS)
2	USB A/F 4P WHITE SOLDER TYPE MOLDED W/METAL HOOD (ROHS)
1	30AWG*1PR(WHITE&GREEN)+28AWG*3C(RED,BLACK,BROWN)+AEB OD:3.8 BLACK(1101) 150MM (ROHS)

roline

ROLINE OTG CABLE, USB A F TO
USB MICRO BM, BLACK 0.15M

DIMENSIONS	TOLERANCE	CHKD.	CONF.
0.00 TO 30.00mm	±0.10mm		
30.01 TO 80.00mm	±0.15mm		
80.01 TO 180.00mm	±0.18mm		
180.01mm +	±0.20mm		

DR. *Pilly*

PART NO. 11.02.8311

SCALE 1/1

SHEET 1/1

UNIT MM

SIZE A4

REV. A

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Roline manufacturer](#):

Other Similar products are found below :

[11.04.5710](#) [11.04.5547](#) [11.04.5779](#) [11.04.5789](#) [11.02.8877](#) [11.04.5690](#) [11.04.5792](#) [11.04.5793](#) [11.04.5202](#) [12.03.3114](#) [11.04.5552](#)
[11.04.5601](#) [11.02.8311](#) [11.02.8753](#) [12.04.1088](#) [11.02.8902](#) [11.02.9025](#) [21.15.0831](#) [21.15.0833](#) [21.15.2713](#) [21.15.2720](#) [21.15.2762](#)
[11.09.4446](#) [11.04.5609](#) [12.02.1041](#) [21.15.0591](#) [11.04.5736](#) [11.04.5691](#) [26.11.0378](#) [12.03.3119](#) [11.01.6230](#) [11.04.5595](#) [11.09.4345](#)
[11.09.4510](#) [21.15.0830](#) [21.15.2606](#) [16.01.3031](#) [11.02.8722](#) [11.02.8780](#) [11.04.5619](#) [11.04.5649](#) [11.04.5818](#) [12.03.3130](#) [11.02.8322](#)
[11.02.8825](#) [11.01.5860](#) [11.09.4338](#) [11.09.4359](#) [12.03.3129](#) [21.15.2630](#)