

## Overhead Door Magnetic Contacts

**SM-226LQ** 2<sup>3</sup>/<sub>4</sub>" (70mm) Gap, Closed loop, UL listed

**SM-226L-3Q** 2<sup>3</sup>/<sub>4</sub>" (70mm) Gap, Open/Closed loop

### Features:


- Used for overhead doors in both industrial and residential situations where a wide gap is present
- Adjustable to fit most door-channel widths
- Switch contained in curved low-profile cast-aluminum housing for surface mounting on garage floor
- Magnet enclosed in gray ABS case on L-bracket
- 24" (61cm) wire leads enclosed in armored cable
- Contact reed switch is SPST, deactivated rhodium on gold underplating for a longer expected life
- For closed loop circuits (SM-226LQ)
- For open/closed loop circuits (SM-226L-3Q)
- 2<sup>3</sup>/<sub>4</sub>" (70mm) Gap
- Mounting bracket included
- Limited lifetime warranty



SM-226LQ Shown




SM-226LQ Only



### Specifications:

Model	SM-226LQ	SM-226L-3Q
Loop type	Closed loop	Open/Closed loop
Electrical config.	N/O	SPDT
Operation gap	2 <sup>3</sup> / <sub>4</sub> " (70mm)	
Material	Switch	Heavy-duty cast-aluminum case
	Terminal	24" (61cm) armored leads
	Magnet	ABS plastic on L-bracket
Contacts	Deactivated rhodium on gold underplating	
Contact rating	0.1A@100VDC (max)	0.02A@100VDC (max)
	1.0A@10VDC (max)	0.2A@10VDC (max)
	10W (max)	3W (max)
Temperature	-15°~160° F (-25°~70° C)	
Switch cycles	50 Million (0.1mA@5VDC)	
Switch dimensions	4 <sup>5</sup> / <sub>16</sub> "x1 <sup>3</sup> / <sub>4</sub> "x7 <sup>1</sup> / <sub>16</sub> " (110x44x11mm)	
Magnet dimensions	3 <sup>15</sup> / <sub>16</sub> "x2"x2" (100x51x51mm)	
Magnet type	Alnico 5	

### Dimensions:

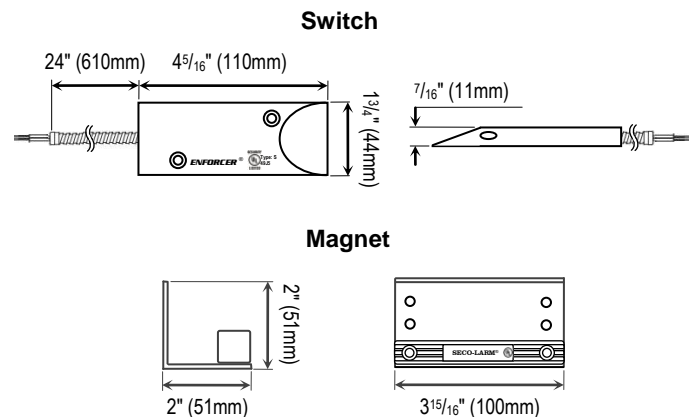

**Note:** On wood surfaces, the magnet shall be installed at least 1/4" (25.4mm) from the switch housing to comply with UL 681 installation requirements

### SECO-LARM® U.S.A., Inc.

16842 Millikan Avenue, Irvine, CA 92606

Phone: (949) 261-2999 | (800) 662-0800 Fax: (949) 261-7326

Website: www.seco-larm.com Email: sales@seco-larm.com

Copyright © 2017 SECO-LARM U.S.A., Inc. All rights reserved. All trademarks are the property of SECO-LARM U.S.A., Inc. or their respective owners. The SECO-LARM policy is one of continual development. For that reason, SECO-LARM reserves the right to change specifications without notice. SECO-LARM is not responsible for misprints.

SECO-LARM® ENFORCER® CRIMEBUSTER® CBA SLI®

PI\_SM-226Lseries\_170717.docx

## X-ON Electronics

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [SECO-LARM](#) manufacturer:*

Other Similar products are found below :

[SS-090-2H1](#) [ST-2406-5A](#) [SL-1301-BAQ/C](#) [SA-027WQ](#) [SD-7202GC-PT](#) [SL-1301-BAQ/B](#) [SM-4105-LQ/B](#) [82-12781](#) [E-936-S45RRGQ](#) [SM-4103-TQ/W](#) [E-941SA-1200](#) [SD-7201GCPE1Q](#) [SK-990AQ](#) [SS-090-2H0](#) [SM-226R-3Q](#) [SD-7202GC-PEQ](#) [E-941SA-300RQ](#) [SM-4104-TQ/W](#) [SM-205Q/BR](#) [SR-1212-C2ALQ](#) [SM-4601-LQ](#) [SA-025Q](#) [SL-126Q/C](#) [SM-200Q/BR](#) [CA-1615-06LQ](#) [SS-074Q/BG](#) [CA-1515Q](#) [SM-4201-LQ](#) [SK-91ERSD](#) [SM-4303-TQ/W](#) [SK-1011-SDQ](#) [SM-216Q/GY](#) [NE-SE01-020Q](#) [CA-1610-3FLQ](#) [NJ-P101M-PQ](#) [SM-226RQ](#) [SS-073Q](#) [SL-126Q/R](#) [SL-126Q/A](#) [SL-1312-SA/R](#) [SL-126Q/B](#) [SM-204Q/W](#) [SM-207-5Q/BR](#) [SM-4102-TQ/W](#) [SM-4301-TQW](#) [CA-1616Q](#) [SM-4601-L3Q](#) [SL-1301-BAQ/R](#) [SM-226LQ](#) [SM-226L-3Q](#)