

Ground distribution module **EB-GND4**



Advantages

0 V collective terminal with 4 or 8 inputs

EB-GND4: Output to feed back up to 40 A to the power supply provided

Total current up to 40 A per module

Applications

Ground distribution module to feed back the 0 V signal to the power supply as a replacement for the series terminal.


Approvals



Ground distribution module EB-GND4

Electrical data	
Type	EB-GND4
Input	
Input rated voltage	12/24/48 Vdc
Input rated current	4 x 10 A
Output	
Output current	max. 40 A
Environment	
Ambient temperature	-40 °C to +70 °C
Storage temperature	-40 °C to +85 °C
Accessory	
Cross connection	EB-BAR41 for bridging modules in series
Order numbers	
Order Number	EB-GND4

Mechanical data	
Type	EB-GND4
Terminal and mounting	
Terminals input, (spring clamp terminal)	0,08 - 2,5 mm ²
Terminals output, (spring clamp terminal)	1,5 - 16 mm ²
Mounting position	horizontal for standard rail DIN TH 35
Measures and weights	
Dimension (W x H x D)	12 x 99 x 60 mm
Weight	0,040 kg

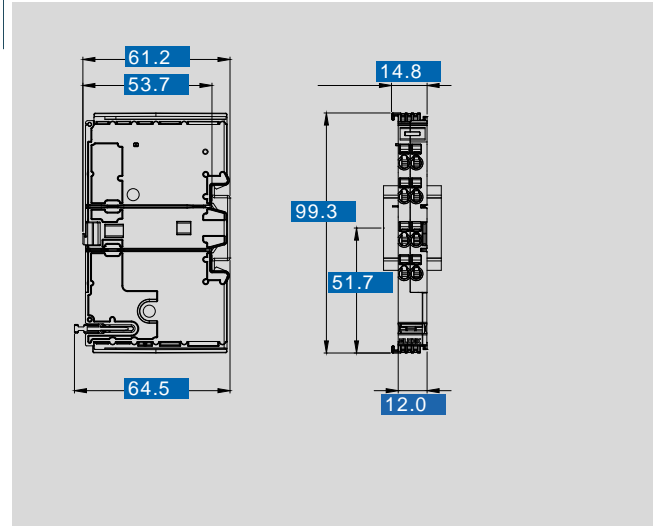

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Block manufacturer](#):

Other Similar products are found below :

[PVSB 400/24-20](#) [RKD 40/2X18](#) [RKD 120/2X24](#) [AVB1.0/2/12](#) [FL52/24](#) [FL6/24](#) [AVB0.5/2/6](#) [AVB2.3/2/6](#) [STEU63/23](#) [VB 0.35/1/15](#) [LR3 48-3/80](#) [LR3 48-5/70](#) [LR3 60-3/70](#) [PC-0148-100-0](#) [PC-0324-100-0](#) [PM-0748-400-0](#) [EB-2724-060-0](#) [PVUA 24/24-20](#) [RKD 100/2X24](#) [VB1.5/2/24](#) [FL4/18](#) [TIM500](#) [VB2.3/2/9](#) [AVB3.2/2/6](#) [STEU320/23](#) [STEU100/24](#) [VB 1.5/2/8](#) [SAT600](#) [LR3 48-5/80](#) [LR3 48-5/90](#) [PM-0124-020-0](#) [PM-0148-020-0](#) [PM-0724-120-0](#) [EB-1824-010-0](#) [STEU160/48](#) [FL10/24](#) [FL14/18](#) [SAT200](#) [DCT24-1.5](#) [FL18/6](#) [FL24/6](#) [VB2.3/2/24](#) [VB2.8/2/15](#) [LR3 48-5/16](#) [PM-0112-040-0](#) [PM-0112-070-0](#) [STEU63/24](#) [FL18/12](#) [FL24/24](#) [STEU250/24](#)