


Thermocouple Extension Cables

With Molded Connectors

ANSI color code shown To order IEC color code visit us online

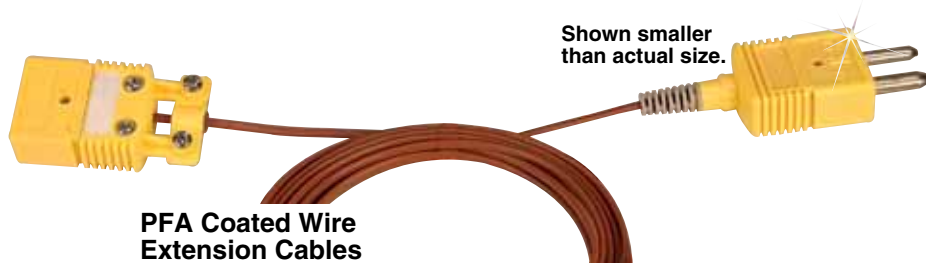

Shown smaller than actual size.

- ✓ Retractable Cable in 1 and 4' Lengths with 5:1 Stretch
- ✓ 24 Gage (0.020" Dia.) PFA Coated or Glass Overbraided Stranded Wire in 10 and 25' Lengths
- ✓ Molded Quick Disconnect or Subminiature Thermocouple Connectors for Low Cost
- ✓ Available in J, K, T and E Calibrations

PFA Coated Wire Extension Cables

Model No.	Calibration	Length
TECJ10-(*)	J Iron-Constantan	3 m (10')
TECJ25-(*)		7.5 m (25')
TECK10-(*)	K CHROMEALOMEGA®	3 m (10')
TECK25-(*)		7.5 m (25')
TECT10-(*)	T Copper-Constantan	3 m (10')
TECT25-(*)		7.5 m (25')
TECE10-(*)	E CHROMEALOMEGA-Constantan	3 m (10')
TECE25-(*)		7.5 m (25')

* Insert connector code from chart. Constructed from 24 gage stranded wire.

"N"
Calibration Available



Shown smaller than actual size.

Glass Braid Wire Extension Cables

Model No.	Calibration	Length
GECJ10-(*)	J Iron-Constantan	3 m (10')
GECJ25-(*)		7.5 m (25')
GECK10-(*)	K CHROMEALOMEGA	3 m (10')
GECK25-(*)		7.5 m (25')
GECT10-(*)	T Copper-Constantan	3 m (10')
GECT25-(*)		7.5 m (25')
GECE10-(*)	E CHROMEALOMEGA-Constantan	3 m (10')
GECE25-(*)		7.5 m (25')

* Insert connector code from chart. Constructed from 24 gage stranded wire.

To order extension cables, specify desired connector combination from chart below

Code	Connector #1	Connector #2
1	OSTW, female	OSTW, female
2	OSTW, female	OST, male
3	OSTW, female	SMPW, female
4	OSTW, female	SMP, male
5	OST, male	OST, male
6	OST, male	SMPW, female
7	OST, male	SMP, male
8	SMPW, female	SMPW, female
9	SMPW, female	SMP, male
10	SMP, male	SMP, male
11	OSTW, female	Stripped leads
12	OST, male	Stripped leads
13	SMPW, female	Stripped leads
14	SMP, male	Stripped leads
15	OSTW, female	Spade lug
16	OST, male	Spade lug
17	SMPW, female	Spade lug
18	SMP, male	Spade lug

Note: OST and OSTW connectors are standard size; SMP and SMPW connectors are subminiature size.

Retractable Extension Cables

Model No.	Calibration	Length
RECJ1-(*)	J Iron-Constantan	30 cm (1')
RECJ4-(*)		120 cm (4')
RECK1-(*)	K CHROMEALOMEGA	30 cm (1')
RECK4-(*)		120 cm (4')
RECT1-(*)	T Copper-Constantan	30 cm (1')
RECT4-(*)		120 cm (4')
RECE1-(*)	E CHROMEALOMEGA-Constantan	30 cm (1')
RECE4-(*)		120 cm (4')

* Insert connector code from chart.

Note: Retractable cables are expandable 5:1, so one foot will expand to 5' in length.
Ordering Example: RECK1-9, retractable extension cable, SMPW subminiature male or female.

Shown smaller than actual size.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Omega manufacturer:

Other Similar products are found below :

[DPG409-100DWU](#) [OM-DAQXL-1-NA](#) [CASS-116U-12](#) [DH-1-20-J-12](#) [GG-J-24-SLE-1000](#) [HPC-AU-P](#) [HPC-IR-P](#) [JMQSS-062U-6](#) [KHSS-18G-RSC-12](#) [KHXL-18G-RSC-12](#) [KMQIN-125U-6](#) [KMQXL-125G-12](#) [KMQXL-125U-6](#) [KQSS-18G-6](#) [KQXL-14U-36](#) [KQXL-18G-12](#) [KQXL-18U-12](#) [NB1-CAXL-14U-12](#) [NB3-CAXL-14U-18](#) [P-M-1/10-1/4-6-0-P-3](#) [PX309-015A5V](#) [PX309-1KGI](#) [PX309-10KGV](#) [PX309-100AI](#) [PX309-100AV](#) [PX309-100GI](#) [PX309-100GV](#) [PX309-3KG5V](#) [PX319-V050G5V](#) [PX319-005AI](#) [PX319-050A5V](#) [PX319-050GI](#) [PX319-10KGI](#) [PX319-100GV](#) [PX319-2KGI](#) [PX319-200AV](#) [PX319-200A5V](#) [PX319-300G5V](#) [PX319-5KG5V](#) [PX319-500G5V](#) [PX319-7.5KGI](#) [PX319-7.5KG5V](#) [PX329-1KG5V](#) [PX329-10KGI](#) [PX329-2KGI](#) [PX409-015DWUI](#) [PX409-015VUSBH](#) [PX409-015VV](#) [PX409-050A5V](#) [PX409-10WDWU5V](#)