
Tubular Thermistor Sensors

For Immersion Temperature Measurements

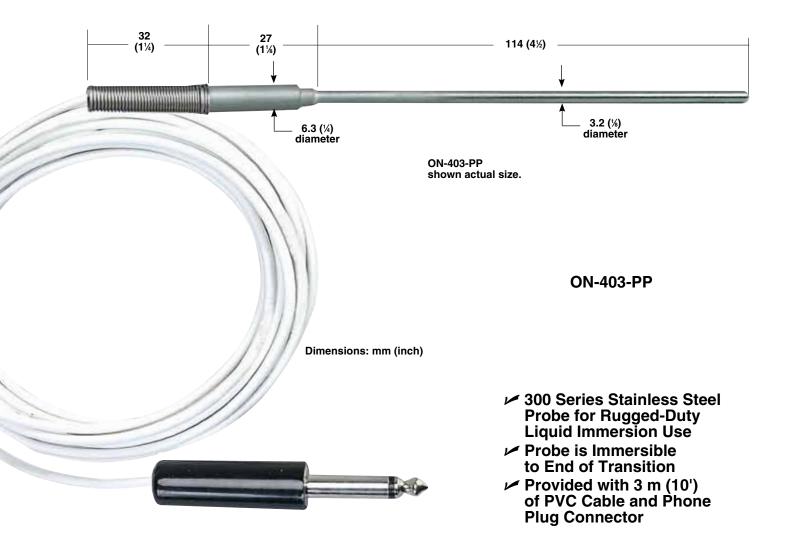

To Order Visit omega.com/on-403-pp for Pricing and Details			
Model Number	Resistance @ 25°C	Interchangeability @ 0 to 70°C	Cable Termination
ON-403-PP	2252 Ω @ 25°C	±0.1°C	Phone plug

Notes: For additional cable length, add required length (in inches) to end of the model number for an additional cost. **Ordering Examples: ON-403-PP,** tubular stainless steel immersion thermistor sensor, 2252 Ω at 25°C, interchangeability is ± 0.1 °C, 3 m (10°) of PVC insulated and jacketed cable and phone plug connector.

ON-403-PP-240, tubular stainless steel immersion thermistor sensor, 2252 Ω at 25°C, interchangeability is ± 0.1 °C, 6 m (20') of PVC insulated and jacketed cable with phone plug.

Accessories

7.0000001100		
Model Number	Description	
450-ATH	Handheld thermometer, thermistor input	
HH41	Handheld thermistor thermometer	
HH42	Handheld thermistor thermometer with RS232 communications	
SSLK-14-18	½" tube OD, ½ NPT, 316 SS compression fitting	

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Omega manufacturer:

Other Similar products are found below:

DPG409-100DWU OM-DAQXL-1-NA CASS-116U-12 DH-1-20-J-12 GG-J-24-SLE-1000 HPC-AU-P HPC-IR-P JMQSS-062U-6 KHSS-18G-RSC-12 KHXL-18G-RSC-12 KMQIN-125U-6 KMQXL-125G-12 KMQXL-125U-6 KQSS-18G-6 KQXL-14U-36 KQXL-18G-12 KQXL-18U-12 NB1-CAXL-14U-12 NB3-CAXL-14U-18 P-M-1/10-1/4-6-0-P-3 PX309-015A5V PX309-1KGI PX309-10KGV PX309-100AI PX309-100AV PX309-100GV PX309-3KG5V PX319-V050G5V PX319-005AI PX319-050A5V PX319-050GI PX319-10KGI PX319-10GV PX319-200AV PX319-200AV PX319-200A5V PX319-300G5V PX319-5KG5V PX319-500G5V PX319-500G5V PX319-500G5V PX319-500G5V PX319-500G5V PX319-500G5V PX319-500G5V PX319-500G5V PX319-500G5V PX319-300G5V PX319