

Heater Hook-Up Wire Accessories

CT-HT.

Crimping Tool


- ✓ Heavy Duty
- ✓ Also Serves as a Wire Cutter (Copper and Aluminum Wire Only)
- ✓ Crimps Lugs onto 10 Through 22 AWG Solid or Stranded Wire



Bus Bars

High-temperature wire and bus bars are recommended for connections to heater terminals and for runs in heated zones. When ambient temperature exceeds the maximum allowed for insulated wire, use a bus bar wire or a bar with porcelain insulators. Current-carrying capacities should be carefully noted. A bus bar is solid or perforated to facilitate wiring, especially when terminals are in line. The perforated bus bar has $\frac{1}{32} \times \frac{7}{32}$ " slots on $\frac{1}{16}$ " centers. When connecting elements with a bus bar, provide expansion loops between elements. Bus bars can be used in multiples for higher amperage capacity (approximately 33.5% per bus bar) than listed to the right. Specify the number of feet of bus bar required for your application.

Porcelain Hi-Temp Insulation for Bus Bars: Porcelain insulators 13 mm ($\frac{1}{2}$ ") long x 21 mm ($\frac{13}{16}$ ") wide with 3 mm ($\frac{1}{8}$ ") x 14 mm ($\frac{9}{16}$ ") slot; 95 pieces per lb.



Bus Bar Insulator

To order bus bar insulators, ask for model no. **BBINS**.

Flexible Metal Armor For Abrasion and Flexing Protection

Model No.: **THE-0043**
Dimensions: 4.8 mm ($\frac{3}{16}$ ") ID, 6.8 ± 15 mm (0.269 ± 0.006") OD

Bus Bars

To Order

Model No.	Manganese-Nickel†	Dimensions: mm (inch)		(Amps)*
		Width	Thickness	
BBS	Solid	13 (0.5)	15.7 (0.62)	26
BBP	Perforated	13 (0.5)	15.7 (0.62)	23


Specify number of feet: 10' minimum.

† Max wire temperature 600°C (1110°F).

* These current values will cause the conductor to operate at 38°C (100°F) above surrounding ambient; values can also be used for bare wire with porcelain tubes or bead insulation.

High-Temperature Ring Terminals

- ✓ 345°C (650°F) Temperature Rating
- ✓ Nickel-Plated Copper
- ✓ Uninsulated

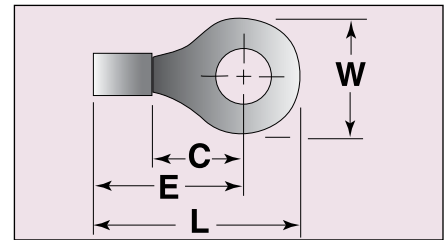


High-Temperature Ring Terminals (pkg of 10)

Model No.	Dimensions: mm (inch)				Stud Size	Use with Wire AWG
	C (min)	W	E (max)	L (max)		
RLNC-22	6 (0.25)	7 (0.28)	11 (0.43)	15 (0.57)	10	22 to 16
RLNC-16	7 (0.28)	9 (0.34)	12 (0.46)	16 (0.64)	10	16 to 14
RLNC-12	8 (0.30)	10 (0.38)	15 (0.57)	19 (0.76)	10	12 to 10

Ultra-High-Temperature Ring Terminals

- ✓ 650°C (1200°F) Temperature Rating
- ✓ 100% Nickel
- ✓ Uninsulated

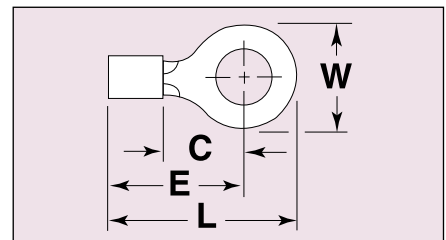

Ultra-High-Temperature Ring Terminals (pkg of 10)

Model No.	Dimensions: mm (inch)				Stud Size	Use with Wire AWG
	C (min)	W	E (max)	L (max)		
RLNI-22	7 (0.28)	8 (0.31)	12 (0.46)	16 (0.62)	10	22 to 16
RLNI-16	7 (0.28)	9 (0.34)	12 (0.46)	16 (0.64)	10	16 to 14
RLNI-12	7 (0.28)	9 (0.37)	14 (0.54)	19 (0.73)	10	12 to 10

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Omega manufacturer](#):

Other Similar products are found below :

[DPG409-100DWU](#) [OM-DAQXL-1-NA](#) [CASS-116U-12](#) [DH-1-20-J-12](#) [GG-J-24-SLE-1000](#) [HPC-AU-P](#) [HPC-IR-P](#) [JMQSS-062U-6](#) [KHSS-18G-RSC-12](#) [KHXL-18G-RSC-12](#) [KMQIN-125U-6](#) [KMQXL-125G-12](#) [KMQXL-125U-6](#) [KQSS-18G-6](#) [KQXL-14U-36](#) [KQXL-18G-12](#) [KQXL-18U-12](#) [NB1-CAXL-14U-12](#) [NB3-CAXL-14U-18](#) [P-M-1/10-1/4-6-0-P-3](#) [PX309-015A5V](#) [PX309-1KGI](#) [PX309-10KGV](#) [PX309-100AI](#) [PX309-100AV](#) [PX309-100GI](#) [PX309-100GV](#) [PX309-3KG5V](#) [PX319-V050G5V](#) [PX319-005AI](#) [PX319-050A5V](#) [PX319-050GI](#) [PX319-10KGI](#) [PX319-100GV](#) [PX319-2KGI](#) [PX319-200AV](#) [PX319-200A5V](#) [PX319-300G5V](#) [PX319-5KG5V](#) [PX319-500G5V](#) [PX319-7.5KGI](#) [PX319-7.5KG5V](#) [PX329-1KG5V](#) [PX329-10KGI](#) [PX329-2KGI](#) [PX409-015DWUI](#) [PX409-015VUSBH](#) [PX409-015VV](#) [PX409-050A5V](#) [PX409-10WDWU5V](#)