


Retractable Sensor Cables

Color Coded, Spring Coiled Retractable Cables for Thermocouples, RTDs and Thermistors

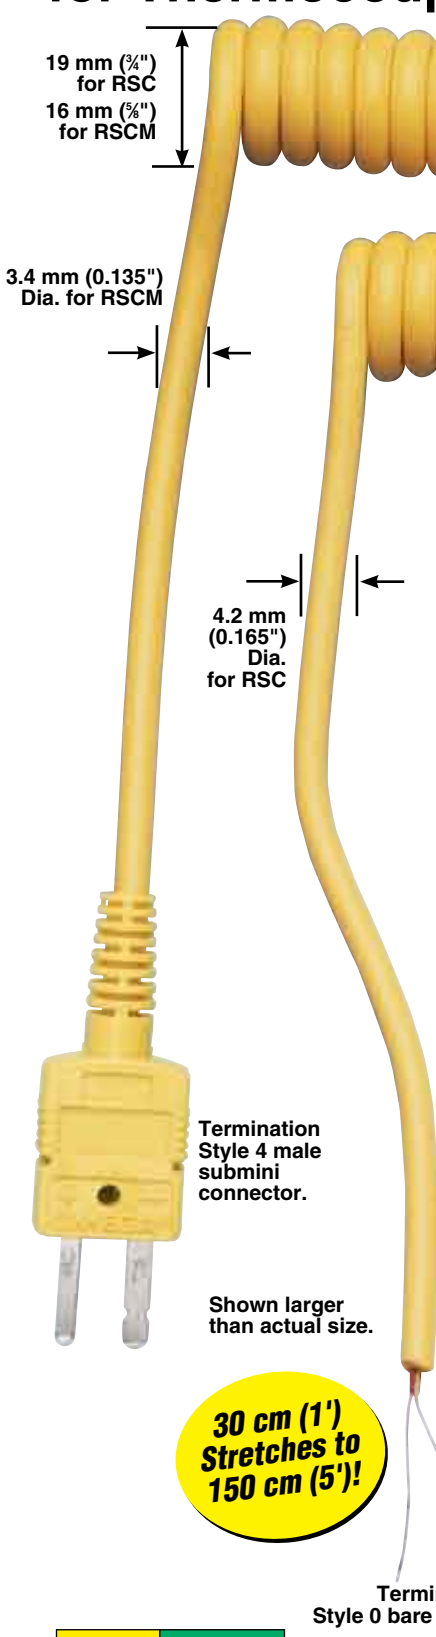

Termination Style 4 male submini connector.

Shown larger than actual size.

30 cm (1') Stretches to 150 cm (5)!

Termination Style 0 bare wires.

- ✓ J, K, T, N and E Thermocouple Calibrations and 3-Wire Copper for RTDs and Thermistors
- ✓ Expansion Ratio up to 500%—30 cm (1') of Cable Stretches to 150 cm (5')
- ✓ TPE Plastic Jacket for Indoor and Outdoor Use to 104°C (220°F)
- ✓ Retracted Coil Lengths of 30, 60, 90 and 120 cm (1', 2', 3' or 4' Nominal) with 15 cm Straight Ends
- ✓ Ideal for Use with Handheld and Benchstand Electronic Indicators

OMEGA® Retractable Sensor Cable is color coded and spring coiled, for use with thermocouples, RTDs and thermistors.

To achieve a superior jacket construction, OMEGA has employed the latest in jacketing material: TPE (thermoplastic elastomer), a unique family of thermoplastics which exhibits characteristics previously found only in rubber compounds. TPE is extremely tough and flexible, and has excellent abrasion resistance. Our special construction technique yields an expansion rate of up to 500%.

OMEGA's retractable sensor cables are specifically recommended for use with electronic-type indicators, either panel, handheld or bench type models. The cables should not be used with self powered, unamplified analog meters, such as OMEGA® Series 7000 pyrometers. Retractable sensor cables have hundreds of applications: oscillating machinery, handheld surface probes, or wherever retractable sensor cables are required.

Specifications

Insulation: TPE thermoplastic elastomer outer jacket

Inner conductors: PFA

Calibrations: ANSI Type J, K, T, E and 3-wire copper for RTDs and thermistors

Thermocouple Wire Conformity: Standard Limits of Error, per ANSI MC 96.1 (1975)

Temperature Rating: -30 to 105°C (-22 to 220°F)

Construction: 28 gauge stranded wire (7 strand x 36 gauge)

Length: Nominal coiled lengths of 30 cm (1'), 60 cm (2'), 90 cm (3'), or 120 cm (4') with 15 cm (6") straight ends, nominal maximum expanded length of 30 cm (1') coil = approx. 150 cm (5')

Length Tolerance: ±10%



Available in J, K, T, N and E calibrations and uncompensated for RTDs and thermistors.

ANSI color code shown To order IEC color code visit us online

Available Terminations

Style 0

1 inch
Trimmed Ends
Standard



All shown smaller than actual size.


Style 1

Compensated
Spade Lugs



Style 4

OMEGA
SMPW-M (Male)



Style 5

OMEGA
SMPW-F (Female)



Style 2

OMEGA
OSTW-M (Male)



Style 3

OMEGA
OSTW-F (Female)



Style 6

OMEGA
OTP-F (Female)
(RTD &
Thermistor)



Style 7

OMEGA
OTP-M (Male)
(RTD and
Thermistor)



Style 8†

OMEGA
TA3-FL (Female)



Style 9†

OMEGA
TA3-ML (Male)



Style 10

OMEGA
MTP-F (Female)
(RTD and Thermistor)



Style 11

OMEGA
MTP-M (Male)
(RTD and Thermistor)



Also Available
in ANSI
Color Code "N"

Discount Schedule

Note: Models can be mixed and matched

1 to 10 units	Net
11 to 24 units	10%
25 to 49 units	15%
50 to 99 units	20%
100 units and up	Consult Sales

Color Code of Cables

ANSI Code	Calibration	Jacket	+Wire	-Wire
J	Iron/Constantan	Black	White	Red
K	CHROMECA®/ALOMEGA®	Yellow	Yellow	Red
T	Copper/Constantan	Blue	Blue	Red
E	CHROMECA®/Constantan	Purple	Purple	Red
RTD/TH	Copper (3-Wire)	White	2 Black	Red

Typical Resistance of Cables

Ω Per Running Foot of Cable 1' Coiled (5' Extended)				Ω Per Foot of Wire (Three Wires Per Cable)
J	K	T	E	RTD and thermistor
16.3	27.5	14.0	33.1	0.57

How To Order

- Fill the 1st box (1) with desired ANSI Calibration. Use ANSI symbols "J", "K", "T", "N", "E" for thermocouple calibration; "RTD" for resistance temperature detector; or "TH" for thermistor.
- Fill in 2nd box (2) with retracted coil length in feet: 1' (30 cm), 2' (60 cm), 3' (90 cm), or 4' (120 cm).
- Fill in 3rd box (3) with termination style number (one end).
- Fill in 4th box (4) with termination style number (other end).

To Order

Model No.** ANSI Color Code	Input Type	OD mm (inch)
RSC-(1)-(2)-(3)-(4)	Thermocouple	4.2 (0.165)
RSC-RTD-(2)-(3)-(4)	RTD	4.4 (0.175)
RSC-TH-(2)-(3)-(4)	TH	4.4 (0.175)
RSCM*-(1)-(2)-(3)-(4)	Thermocouple	3.4 (0.135)

- (1) Thermocouple Type: J, K, T or E
 (2) Retracted Length in feet: 1' = 30 cm, 2' = 60 cm, 3' = 90 cm, 4' = 120 cm nom.
 (3) Termination Style (End #1)
 (4) Termination Style (End #2)

* RSCM = Miniature Retractable Cable.

† Indicate associated meter or pin out desired for connector.

** Add suffix "-IEC" for IEC color code.

Ordering Example: RSC-K-2-1-2, retractable sensor cable, Type K, 60 cm (2') long, with spade lugs on one end and a male OST connector on the other.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Omega manufacturer](#):

Other Similar products are found below :

[DPG409-100DWU](#) [OM-DAQXL-1-NA](#) [CASS-116U-12](#) [DH-1-20-J-12](#) [GG-J-24-SLE-1000](#) [HPC-AU-P](#) [HPC-IR-P](#) [JMQSS-062U-6](#) [KHSS-18G-RSC-12](#) [KHXL-18G-RSC-12](#) [KMQIN-125U-6](#) [KMQXL-125G-12](#) [KMQXL-125U-6](#) [KQSS-18G-6](#) [KQXL-14U-36](#) [KQXL-18G-12](#) [KQXL-18U-12](#) [NB1-CAXL-14U-12](#) [NB3-CAXL-14U-18](#) [P-M-1/10-1/4-6-0-P-3](#) [PX309-015A5V](#) [PX309-1KGI](#) [PX309-10KGV](#) [PX309-100AI](#) [PX309-100AV](#) [PX309-100GI](#) [PX309-100GV](#) [PX309-3KG5V](#) [PX319-V050G5V](#) [PX319-005AI](#) [PX319-050A5V](#) [PX319-050GI](#) [PX319-10KGI](#) [PX319-100GV](#) [PX319-2KGI](#) [PX319-200AV](#) [PX319-200A5V](#) [PX319-300G5V](#) [PX319-5KG5V](#) [PX319-500G5V](#) [PX319-7.5KGI](#) [PX319-7.5KG5V](#) [PX329-1KG5V](#) [PX329-10KGI](#) [PX329-2KGI](#) [PX409-015DWUI](#) [PX409-015VUSBH](#) [PX409-015VV](#) [PX409-050A5V](#) [PX409-10WDWU5V](#)