


Fast Response Thermistor Sensors

Exposed Element with Lead Wires

TH-44000 Series



- ✓ Fast Response (1 Second Max)
- ✓ Interchangeability of $\pm 0.2^{\circ}\text{C}$ Standard ($\pm 0.1^{\circ}\text{C}$ Optional)
- ✓ Operating Range of -80 to 120°C (-110 to 250°F) Standard [-80 to 75°C (-110 to 167°F) Optional]
- ✓ 1 m (40") of 26 AWG Stranded PFA Insulated and Jacketed Cable with Stripped Leads Standard
- ✓ Optional Phone Plug Connector

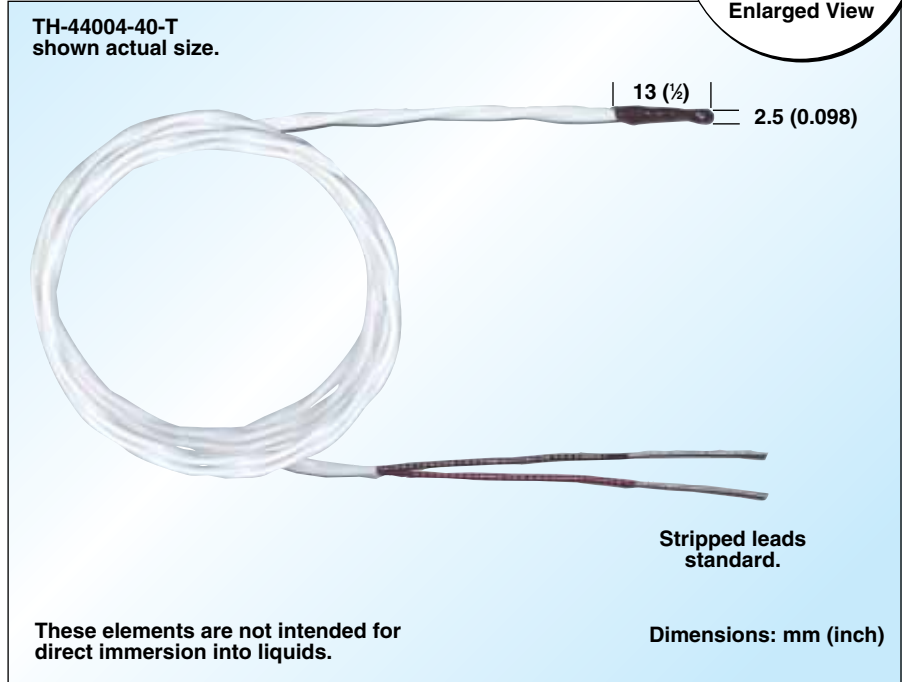

To Order Visit omega.com/th-44000 for Pricing and Details

Model No.	Resistance @ 25°C (Ω)	Maximum Working Temp	Interchangeability @ 0 to 70°C	Storage and Working Temp for Best Stability
TH-44004-40-T	2252 Ω	150°C	±0.2°C	-80 to 120°C (-110 to 250°F)
TH-44005-40-T	3000 Ω	150°C	±0.2°C	-80 to 120°C (-110 to 250°F)
TH-44007-40-T	5000 Ω	150°C	±0.2°C	-80 to 120°C (-110 to 250°F)
TH-44006-40-T	10000 Ω	150°C	±0.2°C	-80 to 120°C (-110 to 250°F)
TH-44008-40-T	30000 Ω	150°C	±0.2°C	-80 to 120°C (-110 to 250°F)

Notes: For additional cable length, add required length to end of the model number for additional cost. For a phone plug, add suffix "-PP" to the model number for additional cost. For tighter interchangeability, substitute the thermistor part number from the table below.

Optional Thermistors

Model No.	Resistance @ 25°C (Ω)	Maximum Working Temp	Interchangeability @ 0 to 70°C	Storage and Working Temp for Best Stability
44033	2252	75°C (167°F)	±0.1°C	-80 to 75°C (-110 to 167°F)
44030	3000	75°C (167°F)	±0.1°C	-80 to 75°C (-110 to 167°F)
44034	5000	75°C (167°F)	±0.1°C	-80 to 75°C (-110 to 167°F)
44031	10,000	75°C (167°F)	±0.1°C	-80 to 75°C (-110 to 167°F)
44032	30,000	75°C (167°F)	±0.1°C	-80 to 75°C (-110 to 167°F)

Ordering Examples: TH-44004-40-T-PP, thermistor sensor with a resistance of 2252 Ω at 25°C, interchangeability of ±0.2°C, 1 m (40") of PFA insulated and jacketed cable and a phone plug connector.

TH-44034-80-T-PP, thermistor sensor with a resistance of 5000 Ω at 25°C, interchangeability of ±0.1°C, 2 m (80") of PFA insulated and jacketed cable and a phone plug connector.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [Omega manufacturer](#):

Other Similar products are found below :

[DPG409-100DWU](#) [OM-DAQXL-1-NA](#) [CASS-116U-12](#) [DH-1-20-J-12](#) [GG-J-24-SLE-1000](#) [HPC-AU-P](#) [HPC-IR-P](#) [JMQSS-062U-6](#) [KHSS-18G-RSC-12](#) [KHXL-18G-RSC-12](#) [KMQIN-125U-6](#) [KMQXL-125G-12](#) [KMQXL-125U-6](#) [KQSS-18G-6](#) [KQXL-14U-36](#) [KQXL-18G-12](#) [KQXL-18U-12](#) [NB1-CAXL-14U-12](#) [NB3-CAXL-14U-18](#) [P-M-1/10-1/4-6-0-P-3](#) [PX309-015A5V](#) [PX309-1KGI](#) [PX309-10KGV](#) [PX309-100AI](#) [PX309-100AV](#) [PX309-100GI](#) [PX309-100GV](#) [PX309-3KG5V](#) [PX319-V050G5V](#) [PX319-005AI](#) [PX319-050A5V](#) [PX319-050GI](#) [PX319-10KGI](#) [PX319-100GV](#) [PX319-2KGI](#) [PX319-200AV](#) [PX319-200A5V](#) [PX319-300G5V](#) [PX319-5KG5V](#) [PX319-500G5V](#) [PX319-7.5KGI](#) [PX319-7.5KG5V](#) [PX329-1KG5V](#) [PX329-10KGI](#) [PX329-2KGI](#) [PX409-015DWUI](#) [PX409-015VUSBH](#) [PX409-015VV](#) [PX409-050A5V](#) [PX409-10WDWU5V](#)