

USB Thermocouple Probe

With Free Recording and Logging Software

TJ-USB Series




Optional

- ✓ Connects Directly to a USB Port on Your Computer
- ✓ Free TRH Central Software Available for Download from OMEGA Converts Your PC into a Temperature Meter, Data Logger or Chart Recorder
- ✓ Available "Off-the-Shelf" in Two Different Measurement Ranges
- ✓ 457 and 610 mm (18 and 24") Probe Lengths Standard
- ✓ Available in 4.5 or 6 mm ($\frac{3}{16}$ or $\frac{1}{4}$ ") Diameter 304 SS, Inconel® and High Performance Super OMEGACLAD® XL Sheaths

OMEGA's TJ-USB Series of thermocouple probes with direct USB connection feature a rugged transition joint construction, 2 m (6') of shielded output cable and free user software that converts your PC into a temperature meter, chart recorder or data logger. Probes are available off-the-shelf in 18 or 24" lengths and with 0.187 or 0.250" 304 stainless steel, Inconel® or high performance Super OMEGACLAD® XL sheathing.

Relative Humidity Probe with USB Connection Available

Infrared Probe with USB Connection Also Available

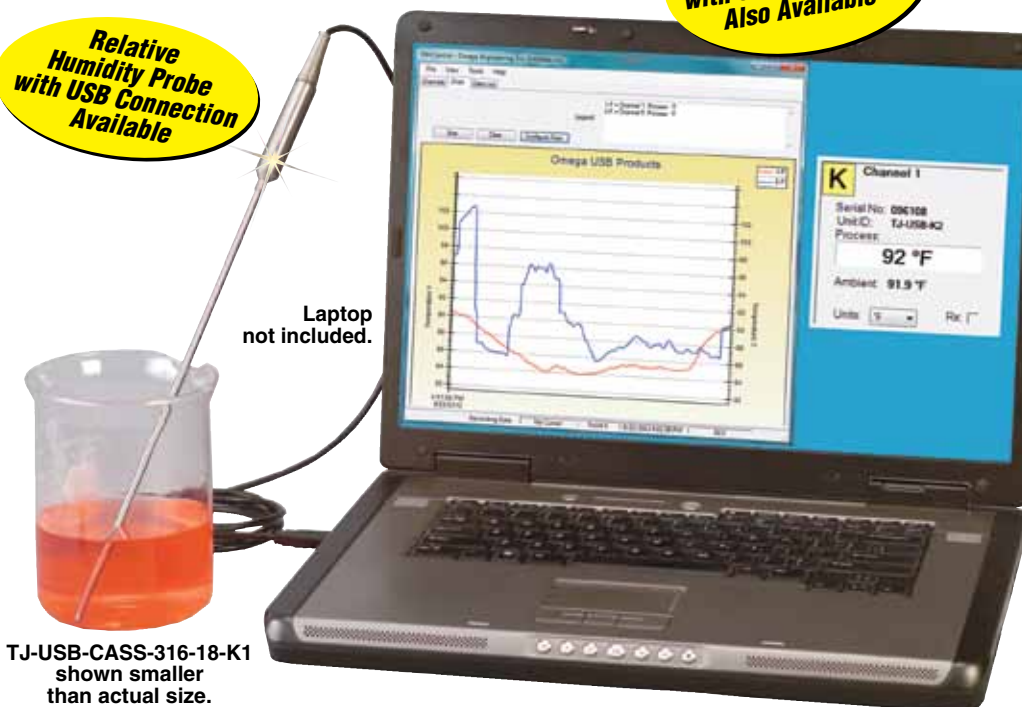

TJ-USB-CASS-316-18-K1 shown smaller than actual size.

Specifications

Integral Thermocouple: Type K (ungrounded)

Measurement Range:

- K1: -73 to 315°C (-100 to 600°F)
- K2: -200 to 1000°C (-328 to 1832°F)

Note: For 304 stainless steel max temperature is 850°C (1562°F)

Accuracy:

- K1: ±1°C (1.8°F)
- K2: ±3°C (5.4°F)

Resolution:

- K1: 0.1°
- K2: 1°

Stability:

- K1: ±0.25°C
- K2: ±0.5°

Cold Junction Compensation (Automatic): -10 to 70°C

Operating Environment (Cold End): -10 to 70°C, 0 to 95% relative humidity (non-condensing)

PC Interface: USB

USB Cable: Integral to probe, 2 m (6') (shielded) Type A plug

Software (Free Download from OMEGA): Requires Windows® 2000, XP, VISTA (32-bit) or Windows 7 (32-bit)

Weight: 70 g (2.5 oz)

To Order	
Model No.	Description
TJ-USB-CASS-(*)-(**)-K1	304 SS transition joint probe -73 to 315°C (-100 to 600°F)
TJ-USB-CASS-(*)-(**)-K2	304 SS transition joint probe -200 to 850°C (-328 to 1562°F)
TJ-USB-CAIN-(*)-(**)-K1	Inconel transition joint probe -73 to 315°C (-100 to 600°F)
TJ-USB-CAIN-(*)-(**)-K2	Inconel transition joint probe -200 to 1000°C (-328 to 1832°F)
TJ-USB-KQXL-(*)-(**)-K1	Nickel-chrome transition joint probe -73 to 315°C (-100 to 600°F)
TJ-USB-KQXL-(*)-(**)-K2	Nickel-chrome transition joint probe -200 to 1000°C (-328 to 1832°F)
RH-USB	Humidity/temperature probe with USB
HX70-MKIT	Wall/duct mounting kit for RH-USB
CAL-3	NIST traceable calibration with 3 data points

*Insert "316" for 4.5 mm (0.187" diameter sheath) or "14" for 6 mm (0.250" diameter sheath).

**Insert "18" for 457 mm (18" probe length) or "24" for 610 mm (24" probe length).

Ordering Examples: TJ-USB-CASS-14-24-K1, heavy-duty USB TJ probe, 304 SS sheath, 6 mm ($\frac{1}{4}$ ") OD, 610 mm (24") long with integral USB cable and Type A connector, -73 to 315°C (-100 to 600°F) temperature range.

TJ-USB-KQXL-316-18-K2, heavy-duty USB TJ probe, Nickel-Chrome sheath, 4.5 mm ($\frac{3}{16}$ ") OD, 457 mm (18") L with integral USB cable and Type A connector, -200 to 1000°C (-328 to 1832°F) temperature range.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for Omega manufacturer:

Other Similar products are found below :

[DPG409-100DWU](#) [OM-DAQXL-1-NA](#) [CASS-116U-12](#) [DH-1-20-J-12](#) [GG-J-24-SLE-1000](#) [HPC-AU-P](#) [HPC-IR-P](#) [JMQSS-062U-6](#) [KHSS-18G-RSC-12](#) [KHXL-18G-RSC-12](#) [KMQIN-125U-6](#) [KMQXL-125G-12](#) [KMQXL-125U-6](#) [KQSS-18G-6](#) [KQXL-14U-36](#) [KQXL-18G-12](#) [KQXL-18U-12](#) [NB1-CAXL-14U-12](#) [NB3-CAXL-14U-18](#) [P-M-1/10-1/4-6-0-P-3](#) [PX309-015A5V](#) [PX309-1KGI](#) [PX309-10KGV](#) [PX309-100AI](#) [PX309-100AV](#) [PX309-100GI](#) [PX309-100GV](#) [PX309-3KG5V](#) [PX319-V050G5V](#) [PX319-005AI](#) [PX319-050A5V](#) [PX319-050GI](#) [PX319-10KGI](#) [PX319-100GV](#) [PX319-2KGI](#) [PX319-200AV](#) [PX319-200A5V](#) [PX319-300G5V](#) [PX319-5KG5V](#) [PX319-500G5V](#) [PX319-7.5KGI](#) [PX319-7.5KG5V](#) [PX329-1KG5V](#) [PX329-10KGI](#) [PX329-2KGI](#) [PX409-015DWUI](#) [PX409-015VUSBH](#) [PX409-015VV](#) [PX409-050A5V](#) [PX409-10WDWU5V](#)