

**A-series
AMC 2.5**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 1429-0
Fax: +49 5231 14292083
www.weidmueller.com

**Spring connection with PUSH IN Technology**

The innovative PUSH IN technology reduces the amount of time you spend on wiring to a minimum. Direct insertion guarantees high conductor pull-out forces and simple handling for all conductor types.

General ordering data

| | |
|------------|----------------------------|
| Type | AMC 2.5 |
| Order No. | 2434340000 |
| GTIN (EAN) | 4050118445022 |
| Qty. | 50 pc(s). |

**A-series
AMC 2.5**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 1429-0
 Fax: +49 5231 14292083
 www.weidmueller.com

Technical data
Dimensions and weights

| | | | |
|--------------------------|----------|-----------------|------------|
| Width | 5.1 mm | Width (inches) | 0.201 inch |
| Height | 107.5 mm | Height (inches) | 4.232 inch |
| Depth | 88 mm | Depth (inches) | 3.465 inch |
| Depth including DIN rail | 88.5 mm | Net weight | 24.644 g |

Temperatures

| | | | |
|----------------------------------|--------|----------------------------------|--------|
| Continuous operating temp., min. | -60 °C | Continuous operating temp., max. | 130 °C |
|----------------------------------|--------|----------------------------------|--------|

Material data

| | | | |
|--------------------------------|--------|---------------------------|------------|
| Material | Wemid | Colour | Dark Beige |
| Colour of operational elements | Orange | UL 94 flammability rating | V-0 |

System specifications

| | | | |
|-------------------------------|-----|-----------------------------------|-------|
| End cover plate required | Yes | Number of potentials | 4 |
| Number of levels | 3 | No. of clamping points per level | 2 |
| Number of potentials per tier | 1 | Levels cross-connected internally | No |
| PE connection | Yes | Mounting rail | TS 35 |
| PE function | Yes | | |

Additional technical data

| | | | |
|---------------------|---------------|-------------------|---------|
| Installation advice | Mounting rail | Open sides | right |
| Snap-on | No | Type of fixing | Snap-on |
| Type of mounting | TS 35 | With snap-in pegs | No |

Conductors for clamping (rated connection)

| | | | |
|---|----------------------|---|---------------------|
| Blade size | 0.6 x 3.5 mm | Clamping range, rated connection, max. | 2.5 mm ² |
| Clamping range, rated connection, min. | 0.14 mm ² | Connection direction | top |
| Cross-section for connected conductor, finely stranded with wire-end ferrules and plastic collars DIN 46228/4, rated connection, min. | 0.5 mm ² | Gauge to IEC 60947-1 | A3 |
| Number of connections | 7 | Stripping length | 10 mm |
| Twin wire-end ferrules, max. | 0.75 mm ² | Twin wire-end ferrules, min. | 0.5 mm ² |
| Type of connection | PUSH IN | Wire connection cross section AWG, max. | AWG 12 |
| Wire connection cross section AWG, min. | AWG 28 | Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, max. | 2.5 mm ² |
| Wire connection cross section, finely stranded with wire-end ferrules DIN 46228/1, rated connection, min. | 0.5 mm ² | Wire connection cross section, finely stranded, max. | 2.5 mm ² |
| Wire connection cross section, solid core max. rated connection | 2.5 mm ² | Wire connection cross section, solid core, min. rated connection | 0.5 mm ² |
| Wire connection cross section, stranded, rated connection, max. | 2.5 mm ² | Wire connection cross section, stranded, rated connection, min. | 0.5 mm ² |
| Wire connection cross-section, finely stranded with wire-end ferrules and plastic collars DIN 46228/4, rated connection, max. | 2.5 mm ² | Wire connection cross-section, finely stranded, min. | 0.5 mm ² |

**A-series
AMC 2.5**

Weidmüller Interface GmbH & Co. KG
 Klingenbergstraße 16
 D-32758 Detmold
 Germany
 Fon: +49 5231 1429-0
 Fax: +49 5231 14292083
 www.weidmueller.com

Technical data**Rating data**

| | | | |
|---------------------|------------------------------------|---------------------------------|-------|
| Rated cross-section | 2.5 mm ² | Rated voltage | 690 V |
| Rated current | 22 A | Current at maximum wires | 21 A |
| Standards | DIN EN 60947-7-1, DIN EN 60947-7-2 | Rated impulse withstand voltage | 8 kV |
| Pollution severity | 3 | Surge voltage category | III |

UL rating data

| | | | |
|--|--------|--|--------|
| Certificate No. (cURus) | E60693 | Conductor size Factory wiring max. (cURus) | 12 AWG |
| Conductor size Factory wiring min. (cURus) | 28 AWG | Conductor size Field wiring max. (cURus) | 12 AWG |
| Conductor size Field wiring min. (cURus) | 28 AWG | Current size B (cURus) | 20 A |
| Current size C (cURus) | 20 A | Current size D (cURus) | 10 A |
| Voltage size B (cURus) | 300 V | Voltage size C (cURus) | 150 V |
| Voltage size D (cURus) | 300 V | | |

Classifications

| | | | |
|------------|-------------|------------|-------------|
| ETIM 6.0 | EC000897 | eClass 6.2 | 27-14-11-20 |
| eClass 9.1 | 27-14-11-20 | | |

Product information

| | |
|---------------------------------|---|
| Descriptive text technical data | Approval in progress |
| Descriptive text accessories | All MultiMark variants (MM) = strip markers |

Approvals

Approvals

**Downloads**

| | |
|---|--|
| Approval/Certificate/Document of Conformity | DE PT0101 20160519 001 ISSUE01 |
| Engineering Data | EPLAN |
| Engineering Data | STEP |

Safety note


| | |
|---------------|------------------------------------|
| Safety notice | Safety Information |
|---------------|------------------------------------|

Data sheet

**A-series
AMC 2.5**

Weidmüller Interface GmbH & Co. KG
Klingenbergstraße 16
D-32758 Detmold
Germany
Fon: +49 5231 1429-0
Fax: +49 5231 14292083
www.weidmueller.com

Drawings

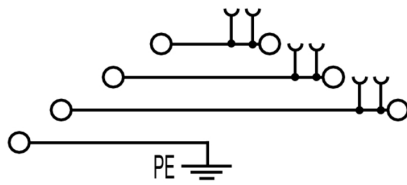

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [weidmuller](#) manufacturer:

Other Similar products are found below :

[8924550000](#) [56956](#) [0133660000](#) [6720000227](#) [6720005111](#) [68676](#) [69718](#) [EXO24CH](#) [7760056348](#) [7940000218](#) [8005181001](#) [8008180000](#)
[8432240000](#) [8463580000](#) [8545830000](#) [8689870000](#) [8705640000](#) [9001080000](#) [9003720000](#) [9004250000](#) [9004780000](#) [9013260000](#)
[9014100000](#) [9019040000](#) [9026010000](#) [9028630000](#) [903708](#) [9037350000](#) [9046290000](#) [9129643500](#) [913155](#) [9159530000](#) [919656](#) [919764](#)
[9202230000](#) [9202850000](#) [9456750000](#) [9457913000](#) [980811](#) [980826](#) [9912800003](#) [9916080000](#) [9916280012](#) [9918380000](#) [9919371205](#)
[9919371224](#) [9925710000](#) [9927480024](#) [1166660000](#) [11751](#)