Mushroom head pushbutton switches

Distinctive features and specifications

A01M_AX1607US



- Panel Sealed to IP65
- Single pole to four pole changeover

AGENCY APPROVALS

- Custom engraving
- Push on tab terminals
- ☐ 6A 250VAC

ELECTRICAL SPECIFICATIONS

- Current/Voltage Rating: 10mA 5VAC min, 6A 250VAC, 6Amp 12VDC
- Initial Contact Resistance : 10mΩ max at 1A 4VDC
- Insulation Resistance : 50MΩ min
- Dielectric Strength: 750V between open contacts, 5KV live to accessible
- Electrical Life : 50,000 cycles min • Contact Gap : >1mm (0.039)
- Insulation : Class 2

MECHANICAL SPECIFICATIONS

- Mechanical Life (operator): Momentary, 1 million cycles, maintained 100,000 cycles
- Terminals: Solder/quick connect 2.8mm (0.110)

GENERAL SPECIFICATIONS

- Operating Temperature : -20°C to +55°C • Solder Heat Resistance : 350°C for 5 seconds
- Sealing: Panel sealed to IP65, rear of panel IP40

MATERIALS

- Screens : PC
- Reflector assembly : PC
- Operator : PBT
- Nut : ABS
- Camtrack Momentary: PPE
 Camtrack maintained: PPSU
 Switch block 1 & 2 pole: PBT
 Switch block 3 & 4 pole: PEI
- Contacts : Gold plated silver





Dimensions : first dimensions are in mm while inches are shown in brackets. Refer to the following pages for further information.



Mounting accessories: standard hardware 1 nut and 1 sealing washer.

PANEL CUT OUT






Mushroom head pushbutton switches

Panel cut-out Ø16 (0.755)

Pushbutton

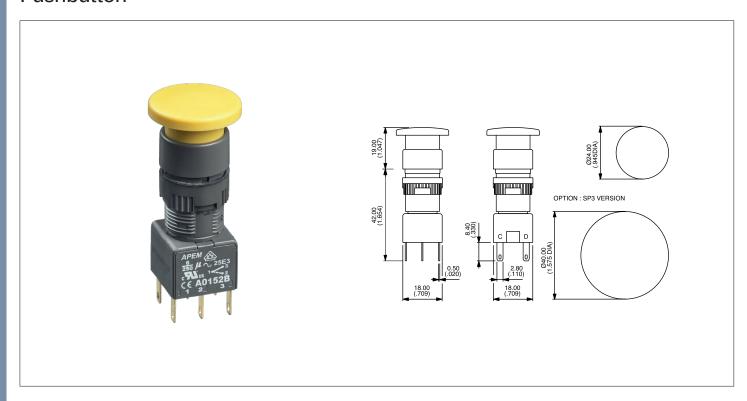


Overview

| | Operator | | Switch | DIOCK | |
|------------|-------------------|------------|-------------|---------|--|
| Ø Actuator | Description | Part No | No of poles | Part No | |
| 24mm | Black Momentary | A01MMA | Single pole | A0151B | |
| 24mm | Red Momentary | A01MMB | Double pole | A0152B | |
| 24mm | Yellow Momentary | A01MMD | Three pole | A0155B | |
| 24mm | Green Momentary | A01MME | Four pole | A0153B | |
| 24mm | Blue Momentary | A01MMF | | | |
| 24mm | Black Maintained | A01MXA | | | |
| 24mm | Red Maintained | A01MXB | | | |
| 24mm | Yellow Maintained | A01MXD | | | |
| 24mm | Green Maintained | A01MXE | | | |
| 24mm | Blue Maintained | A01MXF | | | |
| 40mm | Black Momentary | A01MMA SP3 | | | |
| 40mm | Red Momentary | A01MMB SP3 | | | |
| 40mm | Yellow Momentary | A01MMD SP3 | | | |
| 40mm | Green Momentary | A01MME SP3 | | | |
| 40mm | Blue Momentary | A01MMF SP3 | | | |
| 40mm | Black Maintained | A01MXA SP3 | | | |
| 40mm | Red Maintained | A01MXB SP3 | | | |
| 40mm | Yellow Maintained | A01MXD SP3 | | | |
| 40mm | Green Maintained | A01MXE SP3 | | | |
| 40mm | Blue Maintained | A01MXF SP3 | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |


Mushroom head pushbutton switches

Accessories


Flush mount bezels

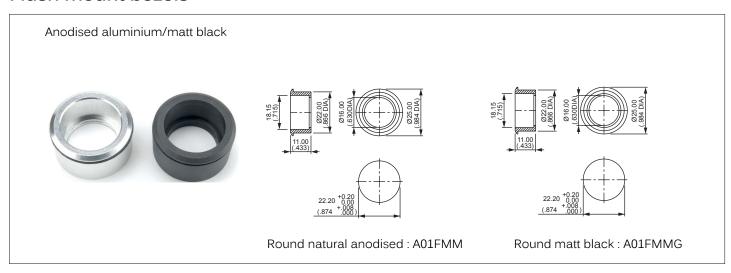

PCB Sockets

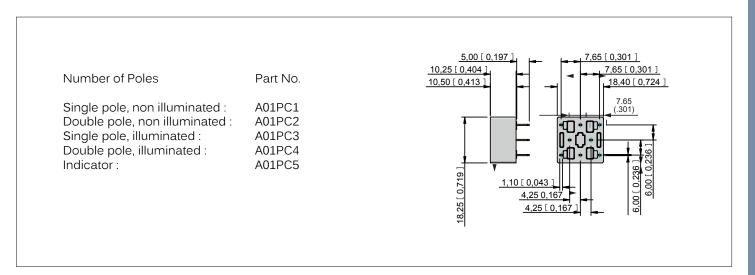

Terminal guards

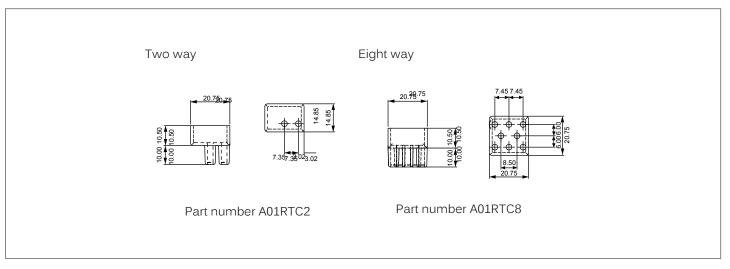


Mushroom head pushbutton switches

Accessories & tools

Anti rotation ring

(216.00 (629DIA) (800 (708) (18.00 (708) (17.00) (17.00)

Blanking plugs

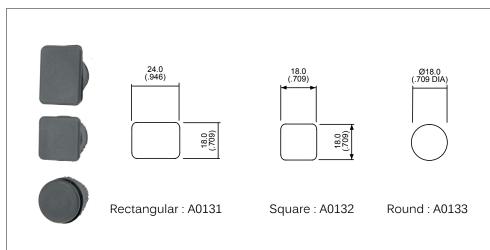

Tools



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for apem manufacturer:

Other Similar products are found below:

48 TW11GRY1 SLB13814 SLC120025 DA04T Q6F1CXXB24 SLG12004 SLB1281R5 DPL-02 DA08 5D15F1534 M11L0A1M M11L0B1M M21L0E1C M31L0M1M CW-A0BK1A00A0 MAB6B A019101 A019305 A019409 A029301 A1PCA0X106J103 Q16F1BXXR12E Q22F1BXXY12E Q22F1CXXB24E Q22F1CXXG12E Q8P1BXXY110E Q8P3BXXG12E Q8P7BZZRYG12E Q8R3BXXG02E 121442RA HF-33S10 HF44R11 HF45R10 HFX44S00 DMR10 DSR04T AV0830C900 AV19810KMZB MSS22 BD150A01RE0000 BD150D02BK1200 HS1T24GA 1D09034 1Z03 1ZZ NZAA0477 NZAA1475 NZAB1475 NZAB1477