

Gigabit 1000-POE+ Injector

N-Tron Networking Series



▶▶▶ Gigabit Mid-Span Power Over Ethernet Plus (PoE+)

The industrial Gigabit 1000-POE+ injector simplifies network deployments by providing a robust solution for transmitting power and data to industrial assets.

Red Lion's N-Tron series 1000-POE+ simplifies network device deployment by combining Gigabit data communications and power over a single Ethernet network cable. Ideal for deployment in industrial networks including oil and gas, water/wastewater, utility, transportation, mining and factory floor applications, the 1000-POE+ provides auto-sensing plug-and-play performance to PoE+ devices like video cameras and network switches. The 1000-POE+ enables customers to save deployment space and installation time by reducing network complexity.



APPLICATIONS

- > Oil & Gas
- > Water/Wastewater
- > Utility
- > Transportation
- > Mining
- > Manufacturing

PRODUCT HIGHLIGHTS

- > IEEE802.3af/at PoE+
- > Gigabit Network Performance
- > 10 to 30 VDC Power Input
- > LED Status Indicators

FEATURES & BENEFITS

- > IEEE802.3af/at Compliant
 - Provides up to 30 watts of power
- > Gigabit Ethernet Speed
 - Supports bandwidth intensive applications
- > Redundant 10 to 30 VDC Power Input
 - Keeps PoE devices running in the event of a power supply failure
- > Rugged Compact Design
 - Perfect for space-constrained applications
- > Extended Environmental Specifications
 - -40° to 80°C operating temperature range
- > LED Status Lights
 - Display power and connectivity conditions

industrial
networking



▶▶▶ 1000-POE+ Specifications

SWITCH PROPERTIES

IEEE 802.3af/at Compliant
One 10/100/1000Base-TX RJ-45 Port (Data In)
One 10/100/1000Base-TX RJ-45 POE+ Port (Data & Power Out)
Unmanaged Operation
Supports 30 Watts per Port (25.5 Watts at the PD)
Up to 1.0 Gb/s Maximum Throughput
Full Wire Speed Communications
Power Status LED
POE Status Indication LED
Hardened Metal DIN-Rail Mountable Enclosure
MTBF: > 2 million hours

POWER INPUT

Input Voltage: 10-30 VDC
Input Current (Max): 1.32 A @ 24 VDC
Inrush: 22.0 A/2.1ms @ 24 VDC

POWER OVER ETHERNET

PoE Standard: IEEE 802.3af/at Gigabit/ Mid-span PSE
PoE Output Power: 54 VDC / 30 Watts Output (25.5W at PD)
PSE Type: Type 2

CONNECTORS

10/100/1000Base-T(X): Two (2) RJ-45 TX Copper Ports

NETWORK MEDIA

10Base-T: >Cat3 Cable
100Base-TX: >Cat5 Cable
1000Base-T: >Cat5e Cable

RECOMMENDED WIRING CLEARANCE

Front: 2"
Top: 1"

CERTIFICATION & COMPLIANCE

Product Safety: USA UL 508; ANSI/ISA-12.12.01-2013, Class I and II, Division 2 and Class III, Divisions 1 and 2 Groups A, B, C and D Hazardous Locations; Canada C22.2 No. 14; C22.2 No. 213-M1987 Class I, Division 2 Hazardous Locations; Temperature Code T4A
EMI/EMC: FCC 47 CFR, Part 15, Subpart B; Industry Canada ICES-003 Issue 5; ANSI C63.4-2009; CE; EMC Directive 2004/108/EC; Immunity EN 61000-6-2:2005; Emissions EN 61000-6-4:2007; EN55011:2009+A1:2010; IEC 61000-4-2/3/4/5/6/8
Rail: EN 50155, EN 50121 and EN 61373
Other: ABS Type Approval for Shipboard Applications; GOST-R certified; RoHS compliant

DESIGNED TO COMPLY WITH

IEEE 1613 for Electric Utility Substations
NEMA TS1/TS2 for Traffic Control


ENVIRONMENTAL

Operating Temperature: -40° to +80°C
Operating Altitude: 0 to 10,000 ft.
Shock: IEC60068-2-27
Vibration: IEC60068-2-6
Humidity: 5 to 95% non-condensing

MECHANICAL

Height: 4.30" (10.92 cm)
Width: 1.00" (2.54 cm)
Depth: 3.63" (9.22 cm)
Including DIN-Rail Mount: 3.83" (9.73 cm)
Weight: 0.6 lbs. (0.27 kg)
DIN-Rail: 35 mm

DIMENSIONS

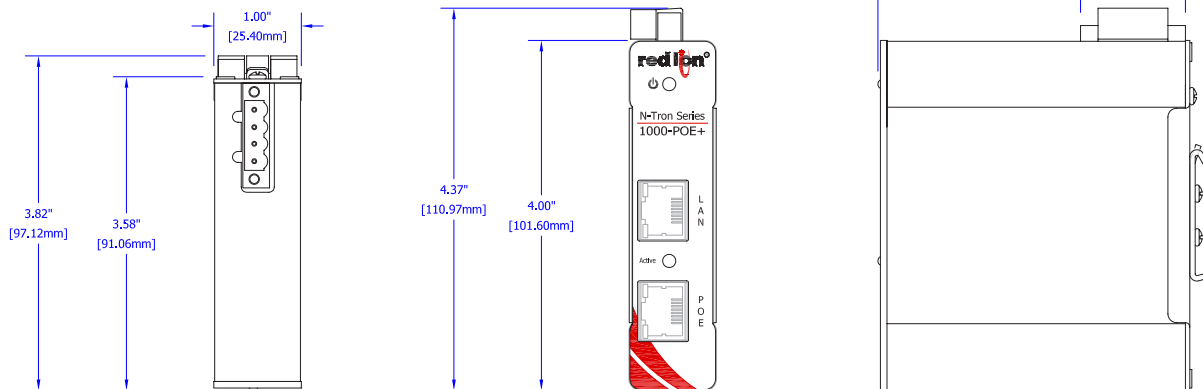

www.redlion.net

Connect. Monitor. Control.

Americas
sales@redlion.net

Asia-Pacific
asia@redlion.net

Europe
Middle East
Africa
europe@redlion.net

+1 (717) 767-6511

As the global experts in communication, monitoring and control for industrial automation and networking, Red Lion has been delivering innovative solutions for over forty years. Our award-winning technology enables companies worldwide to gain real-time data visibility that drives productivity. Product brands include Red Lion, N-Tron and Sixnet. With headquarters in York, Pennsylvania, the company has offices across the Americas, Asia-Pacific and Europe. For more information, please visit www.redlion.net. Red Lion is a Spectris company.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [red lion manufacturer:](#)

Other Similar products are found below :

[IFMA0035](#) [SL-5ES-1](#) [LD400400](#) [PAXI0020](#) [WI0006OF](#) [508TX-A](#) [PAX2A000](#) [ZBH06002](#) [CBLGEN01](#) [1000-POE+](#) [CUB4LP40](#) [SLX-8ES-1](#) [TORF1000](#) [WF1000BF](#) [FANWAND721SMA](#) [FCOPPER-SFP-100](#) [PSDR060W](#) [SLX-5ES-1](#) [309FXE-ST-15](#)
[CRM000CMCMOD0000](#) [CRM000CMDN000000](#) [CR10001000000210](#) [CR30001000000420](#) [PAXDP000](#) [NT24K-16M12-POE-PT](#) [NT24K-16M12-POE-R](#) [NT24K-16M12-POE-R-PT](#) [NT24K-16M12-PT](#) [NT24K-16M12-R-PT](#) [IAMA6262](#) [FMFIBER-SFP-4K](#) [PAXS0000](#)
[CCARPG01](#) [PAXLA000](#) [CUB4CL20](#) [PSAC0000](#) [CUB5USB0](#) [516TX](#) [102MCE-SC-15](#) [304TX](#) [CUB5TCB0](#) [LMPCC000](#) [ENC5A000](#)
[ENC8A000](#) [308TX](#) [508TX](#) [7018TX](#) [708FX2-SC](#) [516TX-A](#) [C48CS003](#)