


PICO® Fuse Equivalent – 2.4 x 7mm Epoxy Coated Axial Lead




Features

- Available in Fast Acting and Slow Blow Types
- RoHS Compliant

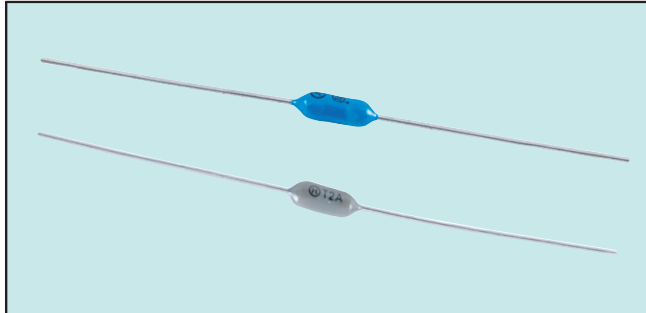

F-09

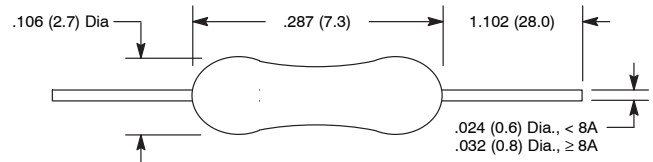

Specifications

Rated Voltage: 125V

Breaking Capacity:

Fast Acting:

125V, 50A (250mA – 3A); 125V, 30A (3.5A – 10A)

Slow Blow:

125V, 30A (375mA – 7A)

Time Current Characteristics:

% of Ampere Rating	Opening Time	
	Fast Acting	Slow Blow
100%	4 hours min.	4 hours min.
200%	20 seconds max.	60 seconds max.
300%	–	0.2 – 3.0 seconds
800%	–	0.02 – 0.1 seconds

Ordering Information:

NTE Type No.		Rated Current	Diag No.
Fast Acting	Slow Blow		
74-MF250MA		250mA	F-09
74-MF375MA	74-MS375MA	375mA	F-09
74-MF500MA	74-MS500MA	500mA	F-09
74-MF750MA	74-MS750MA	750mA	F-09
74-MF1A	74-MS1A	1.0A	F-09
74-MF1.5A	74-MS1.5A	1.5A	F-09
74-MF2A	74-MS2A	2.0A	F-09
74-MF2.5A	74-MS2.5A	2.5A	F-09
74-MF3A	74-MS3A	3.0A	F-09
74-MF3.5A	74-MS3.5A	3.5A	F-09
74-MF4A	74-MS4A	4.0A	F-09
74-MF5A	74-MS5A	5.0A	F-09
74-MF7A	74-MS7A	7.0A	F-09
74-MF10A		10A	F-09

NOTE: All fuses are CSA approved. Fast Acting fuse are UL listed up to 3A and UL recognized from 3.5A to 10A. Slow Blow fuses are UL recognize ONLY.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [nte manufacturer](#):

Other Similar products are found below :

[747](#) [797](#) [868](#) [1724](#) [NEH680M50FE](#) [NEHH1.0M450CB](#) [NTE48](#) [NTE526A](#) [228A](#) [231](#) [954](#) [2023](#) [47-20848-R](#) [510](#) [R04-11A30-120](#) [04-SLPE3750A](#) [5615](#) [591](#) [7056](#) [NTE5710](#) [7448](#) [NEH.10M50AA](#) [NEH2.2M63AA](#) [NEH330M35DD](#) [NEH33M10AA](#) [NEV.22M100AA](#) [TP0006-100](#) [NTE182](#) [NTE528](#) [NTE542](#) [NTE74154](#) [WH20-02-25](#) [04-SCBW25L-BK](#) [04-SCBW32L-BK](#) [04-SCW10C-BK](#) [04-SCBW19L-GR](#) [04-SCW19L-WH](#) [04-SCW19L-OR](#) [04-SCW38L-WH](#) [04-SCBW50L-OR](#) [04-SCBW50L-GR](#) [04-SCW10C-GR](#) [04-SCW10C-OR](#) [04-SCBW32L-GR](#) [04-SCBW32L-WH](#) [04-SCBW32L-OR](#) [04-SCBW6C-WH](#) [04-SCBW6C-GR](#) [04-SCBW6C-OR](#) [04-SCBW25L-GR](#)