


3.6 x 10mm Glass Microfuse, Fast Acting




Features

- RoHS Compliant

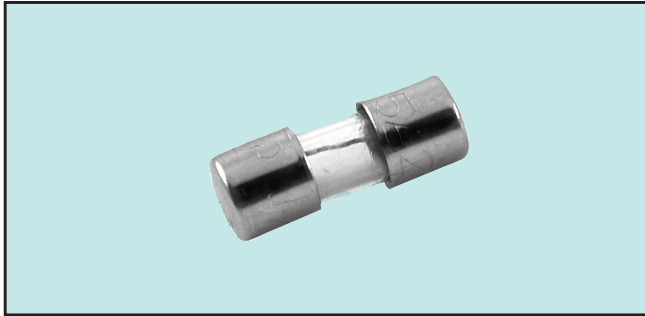

F-01

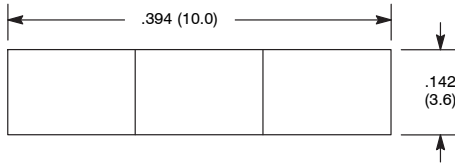

Specifications

Rated Voltage: 125V / 250V

Breaking Capacity: 125VAC, 50A; 250VAC, 50A

Time Current Characteristics:

% of Ampere Rating	Opening Time
110%	4 hours min.
150%	10 minutes max.
200%	5 seconds max.

Ordering Information:

NTE Type No. (Note 1)	Rated Current	Diag No.
74-3FG100MA	100mA	F-01
74-3FG125MA	125mA	F-01
74-3FG1A	1.0A	F-01
74-3FG2A	2.0A	F-01
74-3FG2.5A	2.5A	F-01
74-3FG4A	4.0A	F-01
74-3FG5A	5.0A	F-01

3.6 x 10mm Glass Microfuse, Slow Blow




Features

- RoHS Compliant



F-01

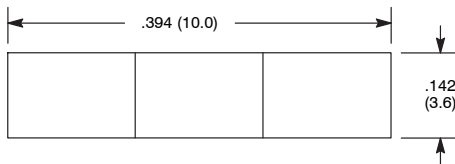

Specifications

Rated Voltage: 125V / 250V

Breaking Capacity: 125VAC, 50A; 250VAC, 50A

Time Current Characteristics:

% of Ampere Rating	Opening Time
110%	4 hours min.
150%	10 minutes max.
200%	120 seconds max.

Ordering Information:

NTE Type No. (Note 1)	Rated Current	Diag No.
74-3SG500MA	500mA	F-01
74-3SG800MA	800mA	F-01
74-3SG1A	1.0A	F-01
74-3SG1.25A	1.25A	F-01
74-3SG2A	2.0A	F-01
74-3SG2.5A	2.5A	F-01
74-3SG4A	4.0A	F-01
74-3SG5A	5.0A	F-01
74-3SG6A	6.0A	F-01

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [nte manufacturer](#):

Other Similar products are found below :

[747](#) [797](#) [868](#) [1724](#) [NEH680M50FE](#) [NEHH1.0M450CB](#) [NTE48](#) [NTE526A](#) [228A](#) [231](#) [954](#) [2023](#) [47-20848-R](#) [510](#) [R04-11A30-120](#) [04-SLPE3750A](#) [5615](#) [591](#) [7056](#) [NTE5710](#) [7448](#) [NEH.10M50AA](#) [NEH2.2M63AA](#) [NEH330M35DD](#) [NEH33M10AA](#) [NEV.22M100AA](#) [TP0006-100](#) [NTE182](#) [NTE528](#) [NTE542](#) [NTE74154](#) [WH20-02-25](#) [04-SCBW25L-BK](#) [04-SCBW32L-BK](#) [04-SCW10C-BK](#) [04-SCBW19L-GR](#) [04-SCW19L-WH](#) [04-SCW19L-OR](#) [04-SCW38L-WH](#) [04-SCBW50L-OR](#) [04-SCBW50L-GR](#) [04-SCW10C-GR](#) [04-SCW10C-OR](#) [04-SCBW32L-GR](#) [04-SCBW32L-WH](#) [04-SCBW32L-OR](#) [04-SCBW6C-WH](#) [04-SCBW6C-GR](#) [04-SCBW6C-OR](#) [04-SCBW25L-GR](#)