


CABLE SPECIFICATION

SPEC NO. : RG59/U SIAMESE CCS COAXIAL CABLE

Customer No. 24-10281

Construction Item		Unit	Construction Item
Conductors	Construction	mm	1/0.81±0.05
	Material	---	CCS
	Filler Material	---	---
	O. D.	mm	0.81±0.05
Insulators	Material	---	Foamed PE
	Diameter	mm	3.70±0.01
	Average Thickness	mm	1.44±0.05
	Colour	---	White
Outer Conductors	AL-PET Foil	um	AL-P-AL
	Type	---	Braid
	Material	---	ALMG
	Coverage	%	60%
	Diameter	mm	3.80±0.15
Jacket	Material	---	PVC (CM)
	Diameter	mm	6.9±0.15
	Average Thickness	mm	1.5±0.10
	Extrusion	---	---
	Surface	---	---
	Colour	---	Black
Power Wire	Construction	mm	16*0.254CU
	Diameter	mm	3.2PVC
Inking	Inking Colour	---	White
	Inking	---	Stellar Labs SIAMESE RG59/U TYPE COAX 75OHM 18AWG 75degC 2250MHz +2C18 E188601 (UL) CM RoHS COMPLIANT
Line	Length	ft	1000

CONFIGURATION:

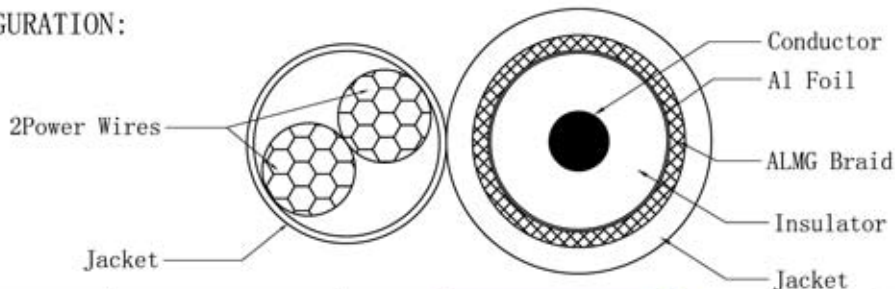

GENERAL TOLERANCES
(UNLESS SPECIFIED)

LENGTH: X. ±1
.X±0.2
.XX±0.10
ANGLE: X° .±1°
.X° ±0° 30'

Stellar Labs™

UNIT:mm	REV:		NAME	RG59/U SIAMESE CCS COAXIAL CABLE
DRAWING	XIAOSHENG2008/10/07		S. P. NO.	
CHECK		P. O. NO.	DWG. NO.	
APPROVE		SIZE	PAGE	1/1

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [stellar labs manufacturer](#):

Other Similar products are found below :

[24-16210](#) [24-16244](#) [28-11104](#) [555-13890](#) [83-9962](#) [24-15411](#) [24-15415](#) [24-15417](#) [24-15434](#) [24-15439](#) [24-14685](#) [24-15989](#) [24-16012](#) [24-16052](#) [24-16135](#) [24-16147](#) [24-1850](#) [24-10271](#) [28-11105](#) [10DV-07203-R](#) [24-15450](#) [24-15453](#) [24-15456](#) [24-15395](#) [24-15124](#) [24-15104](#) [24-15096](#) [24-15114](#) [24-15900](#) [24-15984](#) [24-16040](#) [24-1810](#) [24-14730](#) [24-15416](#) [24-15455](#) [24-15130](#) [24-15061](#) [24-15053](#) [24-15085](#) [24-15126](#) [24-15158](#) [24-16044](#) [24-16095](#) [24-16145](#) [83-12261](#) [555-11695](#) [555-11913](#) [PSG91163](#) [24-12291](#) [24-12307](#)