


# CABLE SPECIFICATION

SPEC NO. : RG59/U SIAMESE CCS COAXIAL CABLE

Customer No. 24-10291

Construction Item	Unit	Construction Item
Conductors	Construction	1/0.81±0.05
	Material	CU
	Filler Material	---
	O. D.	0.81±0.05
Insulators	Material	Foamed PE
	Diameter	3.70±0.01
	Average Thickness	1.44±0.05
	Colour	White
Outer Conductors	AL-PET Foil	AL-P-AL
	Type	Braid
	Material	ALMG
	Coverage	60%
	Diameter	3.80±0.15
Jacket	Material	PVC (CM)
	Diameter	6.9±0.15
	Average Thickness	1.5±0.10
	Extrusion	---
	Surface	---
	Colour	White
Power Wire	Construction	16*0.254CU
	Diameter	3.2PVC
Inking	Inking Colour	Black
	Inking	Stellar Labs SIAMESE RG59/U TYPE COAX 75OHM 20AWG 75degC 2250MHz +2C18 E188601 (UL) CM RoHS COMPLIANT
Line	Length	ft 1000

## CONFIGURATION:

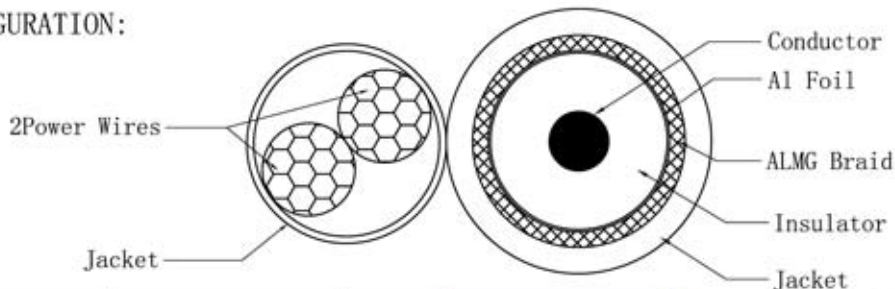

GENERAL TOLERANCES  
(UNLESS SPECIFIED)

LENGTH: X. ±1  
.X ±0.2  
.XX ±0.10  
ANGLE: X° . ±1°  
.X° ±0° 30'

**Stellar Labs™**

UNIT:mm	REV:		NAME	RG59/U SIAMESE COAXIAL CABLE
DRAWING	XIAOSHENG	2008/10/07	S. P. NO.	
CHECK			P. O. NO.	DWG. NO.
APPROVE			SIZE	PAGE 1/1

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [stellar labs manufacturer](#):*

Other Similar products are found below :

[24-16210](#) [24-16244](#) [28-11104](#) [555-13890](#) [83-9962](#) [24-15411](#) [24-15415](#) [24-15417](#) [24-15434](#) [24-15439](#) [24-14685](#) [24-15989](#) [24-16012](#) [24-16052](#) [24-16135](#) [24-16147](#) [24-1850](#) [24-10271](#) [28-11105](#) [10DV-07203-R](#) [24-15450](#) [24-15453](#) [24-15456](#) [24-15395](#) [24-15124](#) [24-15104](#) [24-15096](#) [24-15114](#) [24-15900](#) [24-15984](#) [24-16040](#) [24-1810](#) [24-14730](#) [24-15416](#) [24-15455](#) [24-15130](#) [24-15061](#) [24-15053](#) [24-15085](#) [24-15126](#) [24-15158](#) [24-16044](#) [24-16095](#) [24-16145](#) [83-12261](#) [555-11695](#) [555-11913](#) [PSG91163](#) [24-12291](#) [24-12307](#)