

EB-PSE Industrial PoE Injectors

Sixnet Networking Series



▶▶▶ Industrial Power over Ethernet Injectors

Pass Power & Data to your Ethernet Field Devices over the same Cable.

The EB-PSE-24V-1 or EB-PSE-48V-2 industrial PoE power injectors add 48 VDC power into 1 or 2 Ethernet ports so that you can pass power and data over the same wire to your Ethernet devices in the field. The 24V-1 model steps up your 24 VDC for sourcing 1 PoE port so no separate DC/DC converter is required. The 48V-2 model is two injectors in one to save space and money. Both are ultra-reliable, reliable and easy to use.



APPLICATIONS

- > Video and security
- > Industrial automation and control
- > Fully IEEE 802.3af compliant PSE (Power Sourcing Equipment) operation



PRODUCT HIGHLIGHTS

- > Process machine and motion control
- > Model 1 directly runs off of your existing 24 VDC and powers 1 PoE (48 VDC) port
- > Model 2 saves you space and money by powering 2 PoE (48 VDC) ports
- > Industrial rated for -40 to 75°C operation

FEATURES & BENEFITS

- > IEEE 802.3af compliant PoE ports
 - Power Sourcing Equipment (PSE) operation
 - Auto-detection of PD (powered devices)
 - Supplies up to 15.4 watts per channel
 - Over-temperature and over-current detection
 - Over and under-voltage protection

- > True plug and play simplicity
 - No user settings
 - Ready to use right out of the box
- > Trouble free operation
 - Ultra-reliable 1,000,000+ hours MTBF
 - Slim package for DIN rail or panel mounting

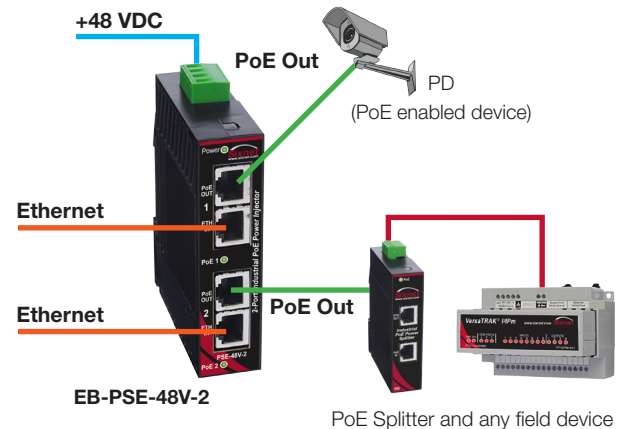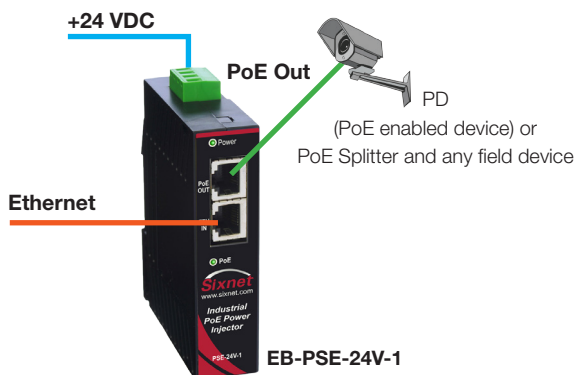

industrial
networking



Industrial Power over Ethernet Injectors Specifications

SWITCH PROPERTIES

Ethernet protocols supported: All IEEE 802.3
 Ethernet connectors per channel: 2 (1 for Ethernet in, 1 for PoE out)
 Ethernet port standards: 10/100BaseTX IEEE 802.3 / 802.3u

POE OUTPUT

IEEE 802.3af PoE operation: Power Sourcing Equipment (PSE)
 PoE power output
 48 VDC @ 15.4 Watts per channel
 24V model: Derate 1W per 2°C over 60°C
 RJ45 PoE pin assignments
 A=unused pair: TX(3,6); RX(1,2); V-(7,8); V+(4,5)
 B=signal pair: TX/V- (3, 6); RX/V+ (1, 2)
 PoE operation: Auto-detection & power management
 PoE disconnect mode: AC for 24V-1 and DC for 48V-2
 PoE protection: Over-temp, over-current,
 over/under-voltage & transient

OPTIONS

Power input for 48V-2 models: 45-56 VDC @ 31 Watts max.
 Power input for 24V-1 models: 18-30 VDC @ 20 Watts max.
 Transient protection 15,000 watts peak
 Spike protection 5,000 watts (10 times for 10 uS)

SUBMITTED FOR TESTING

Electrical safety:UL508/CSA C22.2/14; EN61010-1, CE
 EMI emissions: FCC part 15, ICES-003; EN61000-6-4, CE
 EMC immunity: IEC61000-6-2, CE
 Hazardous locations: UL1604, CSA C22.2/213 (Class I, Div. 2);
 EN60079-15 (Zone 2; Category 3), CE (ATEX)


ENVIRONMENTAL

Operating temperature range: -40 to +75°C
 (cold startup @ -40°C)
 24V model: Derate 1W per 2°C over 60°C
 Storage temperature range: -40 to +85 °C
 Humidity (non-condensing) 5 to 95% RH
 Vibration, shock and freefall: IEC68-2-6, -27 and -32


MECHANICAL

DIN rail or direct panel mounting
 Packaging - Lexan with IP30 protection
 Weight (approximate): 0.17 Kg (0.25 lbs)
 Dimensions - 4 x 1 x 3.3" (10 x 2.5 x 8.3 cm)
 MTBF (estimated): >1,000,000 hours

DIMENSIONS

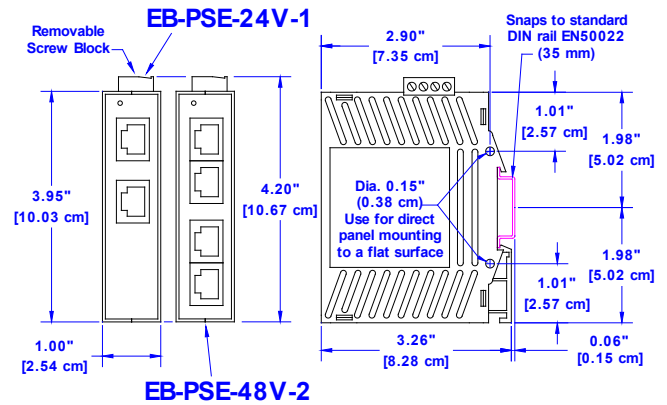

POWER WIRING

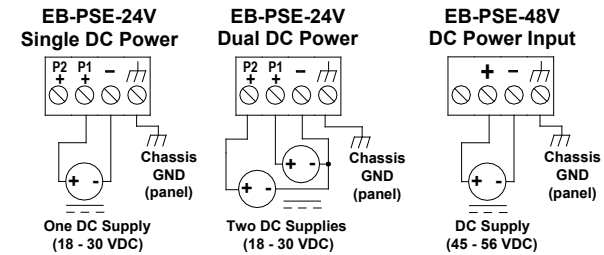

ORDERING GUIDE

PART NUMBER	DESCRIPTION
EB-PSE-24V-1A	PoE injector for 1 PoE port (uses unused pairs), 24V input
EB-PSE-48V-2A	PoE injector for 2 PoE port (uses unused pairs), 48V input
EB-PSE-24V-1B	Special order: uses signal pairs for PoE, ideal for 4 wire cables
EB-PSE-48V-2B	Special order: uses signal pairs for PoE, ideal for 4 wire cables

ACCESSORIES

PART NUMBER	DESCRIPTION
EB-PS-AC48-75	Industrial power supply, AC to 48 VDC, 75W, 1.5A
EB-PS-AC48-120	Industrial power supply, AC to 48 VDC, 120W, 2.5A
EB-PD-24V-1	PoE splitter for 24VDC devices, 13W

Other voltages available—special order.
 All specifications are subject to change. Consult factory for latest info.



www.redlion.net

Connect. Monitor. Control.

Americas
 sales@redlion.net

Asia-Pacific
 asia@redlion.net

**Europe
 Middle East
 Africa**
 europe@redlion.net

+1 (717) 767-6511

As the global experts in communication, monitoring and control for industrial automation and networking, Red Lion has been delivering innovative solutions for over forty years. Our award-winning technology enables companies worldwide to gain real-time data visibility that drives productivity. Product brands include Red Lion, N-Tron and Sixnet. With headquarters in York, Pennsylvania, the company has offices across the Americas, Asia-Pacific and Europe. For more information, please visit www.redlion.net. Red Lion is a Spectris company.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [red lion manufacturer:](#)

Other Similar products are found below :

[IFMA0035](#) [SL-5ES-1](#) [LD400400](#) [PAXI0020](#) [WI0006OF](#) [508TX-A](#) [PAX2A000](#) [ZBH06002](#) [CBLGEN01](#) [1000-POE+](#) [CUB4LP40](#) [SLX-8ES-1](#) [TORF1000](#) [WF1000BF](#) [FANWAND721SMA](#) [FCOPPER-SFP-100](#) [PSDR060W](#) [SLX-5ES-1](#) [309FXE-ST-15](#)
[CRM000CMCMOD0000](#) [CRM000CMDN000000](#) [CR10001000000210](#) [CR30001000000420](#) [PAXDP000](#) [NT24K-16M12-POE-PT](#) [NT24K-16M12-POE-R](#) [NT24K-16M12-POE-R-PT](#) [NT24K-16M12-PT](#) [NT24K-16M12-R-PT](#) [IAMA6262](#) [FMFIBER-SFP-4K](#) [PAXS0000](#)
[CCARPG01](#) [PAXLA000](#) [CUB4CL20](#) [PSAC0000](#) [CUB5USB0](#) [516TX](#) [102MCE-SC-15](#) [304TX](#) [CUB5TCB0](#) [LMPCC000](#) [ENC5A000](#)
[ENC8A000](#) [308TX](#) [508TX](#) [7018TX](#) [708FX2-SC](#) [516TX-A](#) [C48CS003](#)