


Ultra High Precision Z-Foil Miniature Resistor with TCR of $\pm 0.05 \text{ ppm}/^\circ\text{C}$, PCR of 5 ppm at Rated Power and Tolerance to $\pm 0.01 \%$



Any value at any tolerance available with resistance range

The Z202 is a miniaturized version of the now famous Z201. It is made with a Bulk Metal® Z-Foil element so it retains all of the inherent performance of Z-Foil resistors.

The Z-Foil technology provides a significant reduction of the resistive component's sensitivity to ambient temperature variations (TCR) and applied power changes (PCR). Designers can now guarantee a high degree of stability and accuracy in fixed-resistor applications using solutions based on Vishay's revolutionary Z-Foil technology.

Our Application Engineering Department is available to advise and to make recommendations. For non-standard technical requirements and special applications, please contact us.

FEATURES

- Temperature coefficient of resistance (TCR): $\pm 0.05 \text{ ppm}/^\circ\text{C}$ typical (0 °C to + 60 °C); $\pm 0.2 \text{ ppm}/^\circ\text{C}$ typical (- 55 °C to + 125 °C, + 25 °C ref.)
- Tolerance: to $\pm 0.01 \%$
- Power coefficient of resistance (PCR) "ΔR due to self heating": $\pm 5 \text{ ppm}$ at rated power
- Electrostatic discharge (ESD) above 25 000 V
- Resistance range: 5 Ω to 30 kΩ (for higher or lower values, please contact us)
- Power rating: 0.25 W at + 70 °C; 0.125 W at + 125 °C
- Load life stability: $\pm 0.01 \%$ maximum ΔR at + 70 °C at Rated power for 2000 h
- Non inductive, non capacitive design
- Current noise: - 40 dB
- Thermal EMF: < 0.1 μV/°C
- Voltage coefficient: < 0.1 ppm/V
- Non inductive: < 0.08 μH
- Non hot spot design
- Maximum working voltage: 250 V
- Terminal finishes available: lead (Pb)-free tin/lead alloy
- Any value available within resistance range (e.g. 1K234)
- Prototype samples available from 48 h. For more information, please contact foil@vishaypg.com
- For better performances, please see Z201 datasheet



RoHS*
COMPLIANT

FIGURE 1 - IMPRINTING AND DIMENSIONS

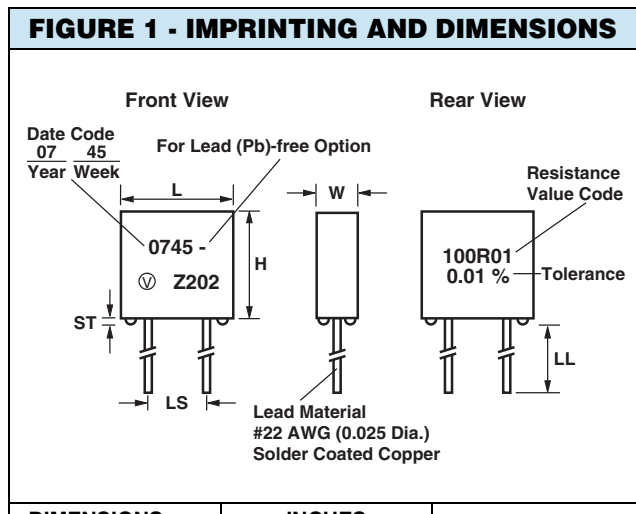


FIGURE 2 - POWER DERATING CURVE

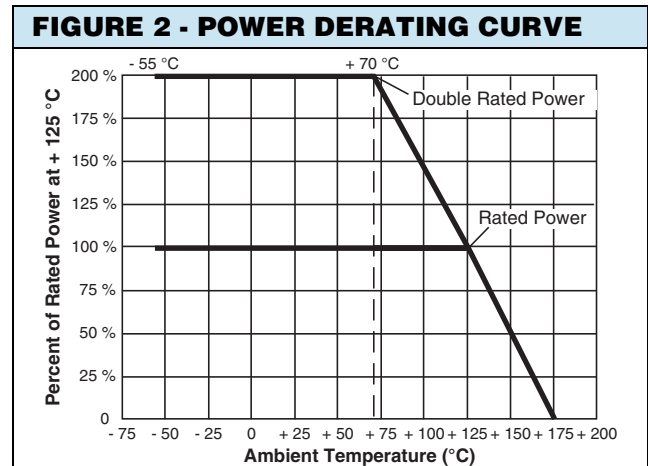


TABLE 1 - TOLERANCE AND TCR VERSUS

VALUE	STANDARD TOLERANCE	TYPICAL TCR AND MAXIMUM SPREAD - 55 °C to + 125 °C (+ 25 °C Ref.)
50 Ω to 30 kΩ	± 0.01 %	± 0.2 ± 1.8
20 Ω to < 50 Ω	± 0.02 %	± 0.2 ± 2.8
10 Ω to < 20 Ω	± 0.05 %	± 0.2 ± 4.8
5 Ω to < 10 Ω	± 0.1 %	± 0.2 ± 6.8

* Pb containing terminations are not RoHS compliant, exemptions may apply

FIGURE 3 - TYPICAL TCR CURVE Z-FOIL

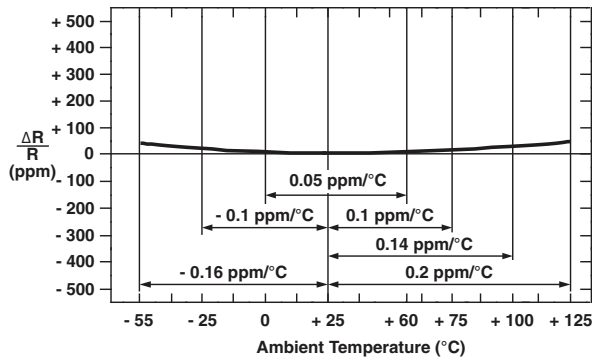


FIGURE 4 - TRIMMING TO VALUES
(Conceptual Illustration)


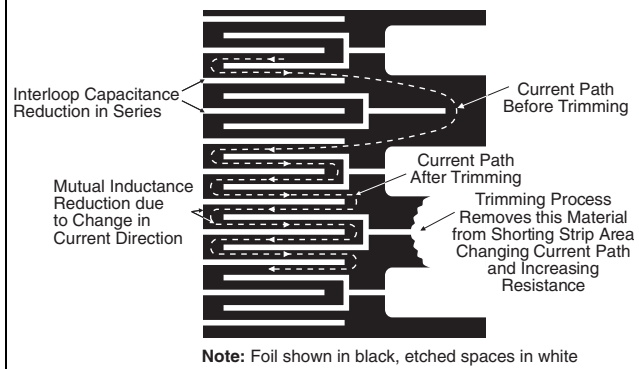


TABLE 2 - ENVIRONMENTAL PERFORMANCE COMPARISON

	MIL-PRF-55182 CHAR J	Z202	
		MAXIMUM ΔR	TYPICAL ΔR
Test Group I			
Thermal shock (5 x - 65 °C to + 150 °C)	± 0.2 %	± 0.01 % (100 ppm)	± 0.005 % (50 ppm)
Short time overload (6.25 x P _{nom} x 5 s)	± 0.2 %	± 0.01 % (100 ppm)	± 0.005 % (50 ppm)
Test Group II			
Resistance temperature characteristic	± 25 ppm/°C	See table 1	± 0.05 ppm/°C (0 °C to + 60 °C)
Low temperature storage	± 0.15 %	± 0.01 % (100 ppm)	± 0.002 % (20 ppm)
Low temperature operation	± 0.15 %	± 0.01 % (100 ppm)	± 0.002 % (20 ppm)
Terminal strength	± 0.2 %	± 0.01 % (100 ppm)	± 0.002 % (20 ppm)
Test Group III			
DWV	± 0.15 %	± 0.01 % (100 ppm)	± 0.002 % (20 ppm)
Resistance to soldering heat	± 0.1 %	± 0.01 % (100 ppm)	± 0.005 % (50 ppm)
Moisture resistance	± 0.4 %	± 0.05 % (500 ppm)	± 0.01 % (100 ppm)
Test Group IV			
Shock	± 0.2 %	± 0.01 % (100 ppm)	± 0.002 % (20 ppm)
Vibration	± 0.2 %	± 0.01 % (100 ppm)	± 0.002 % (20 ppm)
Test Group V			
Life test at 0.125 W, 125 °C for 2000 h	± 0.5 %	± 0.025 % (250 ppm)	± 0.01 % (100 ppm)
Test Group Va			
Life test at 0.25 W (2 x rated power), 70 °C for 2000 h	± 0.5 %	± 0.02 % (200 ppm)	± 0.01 % (100 ppm)
Test Group VI			
High temperature exposure	± 2.0 %	± 0.1 % (1000 ppm)	± 0.05 % (500 ppm)

TABLE 3 - GLOBAL PART NUMBER INFORMATION

NEW GLOBAL PART NUMBER: Y107325K4540Q9L (preferred part number format)

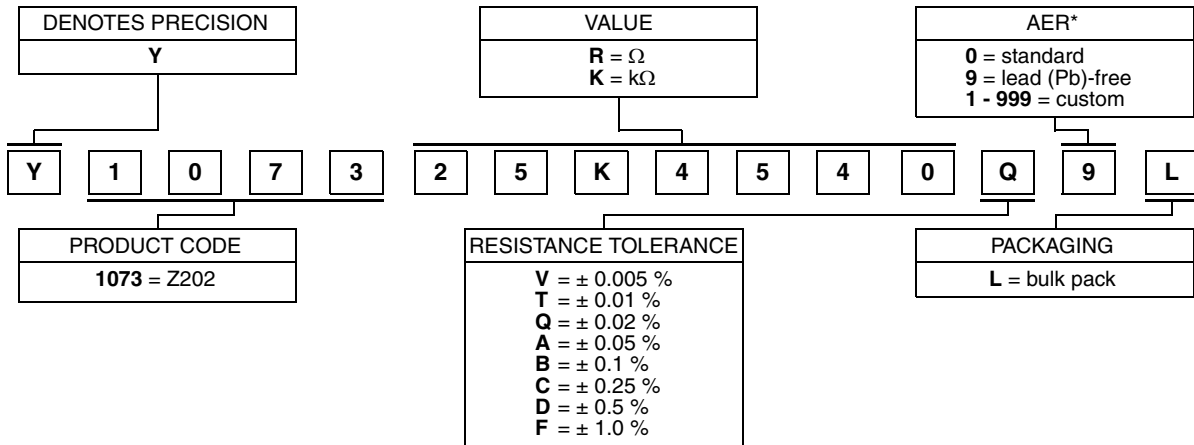

FOR EXAMPLE: ABOVE GLOBAL ORDER Y1073 25K4540 Q 9 L:

TYPE: Z202


VALUE: 25.454 kΩ

ABSOLUTE TOLERANCE: ± 0.02 %

TERMINATION: lead (Pb)-free

PACKAGING: bulk pack

HISTORICAL PART NUMBER EXAMPLE: Z202T 25K454 Q B (will continue to be used)

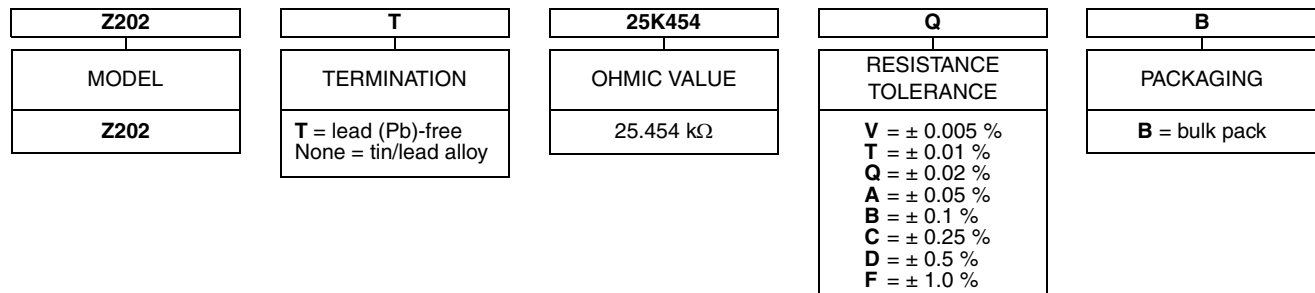

Note

* For non-standard requests, please contact Application Engineering.



Disclaimer

ALL PRODUCTS, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE.

Vishay Precision Group, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "VPG"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained herein or in any other disclosure relating to any product.

The product specifications do not expand or otherwise modify VPG's terms and conditions of purchase, including but not limited to, the warranty expressed therein.

VPG makes no warranty, representation or guarantee other than as set forth in the terms and conditions of purchase. **To the maximum extent permitted by applicable law, VPG disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.**

Information provided in datasheets and/or specifications may vary from actual results in different applications and performance may vary over time. Statements regarding the suitability of products for certain types of applications are based on VPG's knowledge of typical requirements that are often placed on VPG products. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. You should ensure you have the current version of the relevant information by contacting VPG prior to performing installation or use of the product, such as on our website at vpgsensors.com.

No license, express, implied, or otherwise, to any intellectual property rights is granted by this document, or by any conduct of VPG.

The products shown herein are not designed for use in life-saving or life-sustaining applications unless otherwise expressly indicated. Customers using or selling VPG products not expressly indicated for use in such applications do so entirely at their own risk and agree to fully indemnify VPG for any damages arising or resulting from such use or sale. Please contact authorized VPG personnel to obtain written terms and conditions regarding products designed for such applications.

Product names and markings noted herein may be trademarks of their respective owners.

Copyright Vishay Precision Group, Inc., 2014. All rights reserved.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [vishay](#) manufacturer:

Other Similar products are found below :

[M39006/22-0577H](#) [Y00892K49000BR13L](#) [VS-12CWQ10FNPBF](#) [M8340109M6801GGD03](#) [VS-MBRB1545CTPBF](#) [1KAB100E](#)
[CRCW1210360RFKEA](#) [VSMF4720-GS08](#) [CRCW04024021FRT7](#) [001789X](#) [LTO050FR0500JTE3](#) [CRCW0805348RFKEA](#)
[LVR10R0200FE03](#) [CRCW12063K30FKEAHP](#) [009923A](#) [CRCW2010331JR02](#) [CRCW25128K06FKEG](#) [CS6600552K000B8768](#) [M39003/01-2289](#) [M39003/01-2784](#) [M39006/25-0133](#) [M39006/25-0228](#) [M64W101KB40](#) [M64Z501KB40](#) [CW001R5000JS73](#) [CW0055R000JE12](#)
[CW0056K800JB12](#) [CW0106K000JE73](#) [672D826H075EK5C](#) [CWR06JC105KC](#) [CWR06NC475JC](#) [MAL219699001E3](#)
[MCRL007035R00JHB00](#) [PTF56100K00QYEK](#) [PTN0805H1502BBTR1K](#) [RCL12252K20JNEG](#) [RCWL1210R130JNEA](#) [RH005220R0FE02](#)
[RH005330R0FC02](#) [RH010R0500FC02](#) [132B20103](#) [RH1007R000FJ01](#) [RH2503R500FE01](#) [RH254R220FS03](#) [RH-50-40R2-1%-C02](#)
[134D336X9075C6](#) [132B00301](#) [135D277X0025F6](#) [DG202BDY-T1-E3](#) [DG9426EDQ-T1-GE3](#)