

SANITARY TEMPERATURE SENSORS


Flexible Sealed PFA RTD Sensors For Use in Wet and Corrosive Environments

HSRTD Series



Custom Lengths Available

- ✓ 100 Ω , Class "A" or "B" DIN Platinum Element Standard, Other Resistances and Classes Available
- ✓ Sealed Against Moisture and Corrosion
- ✓ PFA Insulated Cable
- ✓ Temperature Range: -60 to 260°C
- ✓ 4-Wire Configuration Standard
- ✓ Easily Cleaned and Sterilized

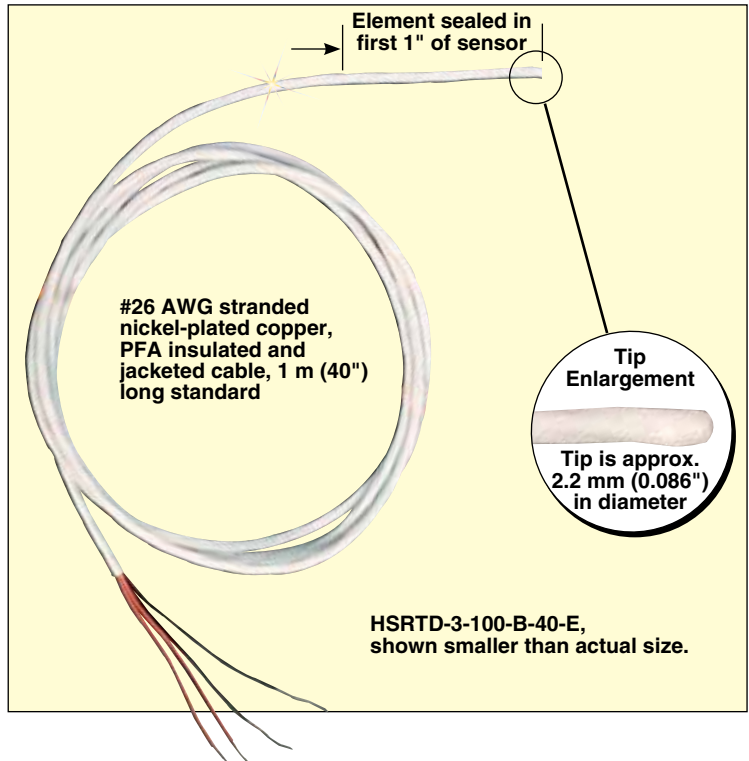

To Order

Model Number	Resistance	Number of Wires	Wire Length
HSRTD-3-100-A-40-E	100 Ω , Class "A"	4	1 m (40")
HSRTD-3-100-A-80-E	100 Ω , Class "A"	4	2 m (80")
HSRTD-3-100-A-120-E	100 Ω , Class "A"	4	3 m (120")
HSRTD-3-100-A-180-E	100 Ω , Class "A"	4	4.5 m (180")
HSRTD-3-100-A-240-E	100 Ω , Class "A"	4	6 m (240")
HSRTD-3-100-B-40-E	100 Ω , Class "B"	4	1 m (40")
HSRTD-3-100-B-80-E	100 Ω , Class "B"	4	2 m (80")
HSRTD-3-100-B-120-E	100 Ω , Class "B"	4	3 m (120")
HSRTD-3-100-B-180-E	100 Ω , Class "B"	4	4.5 m (180")
HSRTD-3-100-B-240-E	100 Ω , Class "B"	4	6 m (240")

Options: Sensors come with stripped leads standard. For custom cable lengths greater than 6 m (240"), change the "-240" variable at the end of the model number to desired length in inches for additional cost. For miniature connectors add "-MTP" to the end of the model number for additional cost. For a 4-wire audio connector, add "-TA4F" to model number for additional cost.

Ordering Examples: HSRTD-3-100-B-40-TA4F, 100 Ω Class "B" sensor with 1 m (40") of cable and TA4F connector.

HSRTD-3-100-A-120-E, 100 Ω Class "A" sensor with 3 m (120") of cable.



X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [omega manufacturer](#):

Other Similar products are found below :

[PX309-5KGI](#) [SMPW-J-M](#) [5SC-TT-T-36-36](#) [5SRTC-TT-K-30-72](#) [MJP2-12-T](#) [CASS-116U-12](#) [CHAL-002](#) [DH-1-20-J-12](#) [GG-J-24-SLE-1000](#)
[HPC-AU-P](#) [HPC-IR-P](#) [KHSS-18G-RSC-12](#) [KMQIN-125U-6](#) [KMQXL-125G-12](#) [KMQXL-125U-6](#) [KQSS-18G-6](#) [KQXL-14U-36](#) [KQXL-](#)
[18G-12](#) [NB3-CAXL-14U-18](#) [PX309-100AI](#) [PX309-100AV](#) [PX309-100GV](#) [PX319-V050G5V](#) [PX319-V100G5V](#) [PX319-002GI](#) [PX319-](#)
[050GI](#) [PX319-100GV](#) [PX319-200AV](#) [PX319-200A5V](#) [PX319-300G5V](#) [PX319-500G5V](#) [PX319-7.5KGI](#) [PX319-7.5KG5V](#) [PX329-1KG5V](#)
[PX329-10KGI](#) [PX329-2KGI](#) [PX409-015VUSBH](#) [PX409-015VV](#) [PX409-050A5V](#) [PX409-1.0KGUSBH](#) [PX409-10WVI](#) [PX409-100A5V](#)
[PX409-5.0KG5V](#) [PX409-500GUSBH](#) [PX41T0-300GI](#) [PX419-250GI](#) [P10R-005](#) [SA1-RTD-4W-120](#) [SA1-T-72-SRTC](#) [SA1XL-K-SRTC](#)