


3 mV/V OUTPUT CANISTER LOAD CELLS STAINLESS STEEL

**Tension/Compression
Calibrated in Tension†
LC1102 (Cable Style)
LC1112 (Connector Style)
0-50 lb to 0-100,000 lb
0-23 kg to 0-45,372 kg**

1 Newton = 0.2248 lb
1 daNewton = 10 Newtons
1 lb = 454 g
1 t = 1000 kg = 2204 lb

† Ranges ≥ 100,000 lb calibrated
in compression.



**Models
Available with
Built-In Amplifiers!
See omega.com**

LC1102/LC1112 Series



LC1102-5K,
shown smaller than
actual size, see next
page for dimensions.

- ✓ 5-Point Calibration Included
- ✓ Dual-Bridge Models Available
- ✓ High Accuracy

To Order Visit omega.com/lc1102 for Pricing and Details

CAPACITY		CABLE STYLE	CONNECTOR STYLE	COMPATIBLE METERS**	LOAD BUTTON	ROD END
lb	kg				MODEL	MODEL
50	23	LC1102-50	LC1112-50	DP41-B, DP41-S, DP25B-S	LBC-038	REC-038M
100	45	LC1102-100	LC1112-100	DP41-B, DP41-S, DP25B-S	LBC-038	REC-038M
300	136	LC1102-300	LC1112-300	DP41-B, DP41-S, DP25B-S	LBC-038	REC-038M
500	227	LC1102-500	LC1112-500	DP41-B, DP41-S, DP25B-S	LBC-012	REC-012M
1000	455	LC1102-1K	LC1112-1K	DP41-B, DP41-S, DP25B-S	LBC-012	REC-012M
2000	909	LC1102-2K	LC1112-2K	DP41-B, DP41-S, DP25B-S	LBC-012	REC-012M
5000	2269	LC1102-5K	LC1112-5K	DP41-B, DP41-S, DP25B-S	LBC-100	REC-100M
10,000	4537	LC1102-10K	LC1112-10K	DP41-B, DP41-S, DP25B-S	LBC-100	REC-100M
15,000	6806	LC1102-15K	LC1112-15K	DP41-B, DP41-S, DP25B-S*	LBC-100	REC-100M
20,000	9074	LC1102-20K	LC1112-20K	DP41-B, DP41-S, DP25B-S*	LBC-112	REC-112M
25,000	11,343	LC1102-25K	LC1112-25K	DP41-B, DP41-S, DP25B-S*	LBC-112	REC-112M
50,000	22,686	LC1102-50K	LC1112-50K††	DP41-B, DP41-S, DP25B-S*	LBC-200-12	
100,000	45,372	LC1102-100K	LC1112-100K††	DP41-B, DP41-S, DP25B-S*	LBC-300-8	

Comes complete with 5-point NIST-traceable calibration. ††Special quote. * 4-digit meter, counts by 10. ** See omega.com for compatible meters.

To order a dual bridge version, add suffix “-DUAL” to model number. See omega.com for pricing.

To order unit with integral connector, specify LC1112, no extra charge. PT06F10-6S, mating connector (sold separately).

Ordering Examples: LC1102-100K, 100,000 lb capacity load cell.

LC1112-5K, 5000 lb capacity load cell with integral connector.

PT06F10-6S, mating connector (sold separately).

LC1102-100-DUAL, dual-output 100 lb capacity load cell.

ACCESSORY


MODEL NO.	DESCRIPTION
PT06F10-6S	Mating connector for LC1112 series load cells

LOAD CELLS

HIGH-OUTPUT UNIVERSAL CANISTER LOAD CELLS



LC1102-100 shown smaller than actual size.



SPECIFICATIONS


Output: 3 mV/V $\pm 0.25\%$ FSO
Excitation: 10 Vdc (15V maximum)
Accuracy Class: $\pm 0.05\%$ FSO
Linearity: $\pm 0.05\%$ FSO
Hysteresis: $\pm 0.02\%$ FSO
Repeatability: $\pm 0.02\%$ FSO
Zero Balance: $\pm 1.0\%$ FSO
Operating Temp Range:
 -24 to 79°C (-30 to 175°F)
Compensated Temp Range:
 16 to 71°C (60 to 160°F)
Thermal Effects:
Zero: $\pm 0.003\%$ FSO/°C
Span: $\pm 0.014\%$ rdg/°C
Protection Class: IP67
Safe Overload: 150% of capacity
Ultimate Overload: 300% of capacity
Bridge Resistance: 350 Ω
Full Scale Deflection:
 0.08 to 0.13 mm (0.003 to 0.005") typical.

Construction: Stainless steel

Electrical: 4.6 m (15') 4-conductor shielded color-coded cable

POPULAR OPTIONS (Additional Cost)

0 to 5 Vdc Output "5V"
Overload Stops: "-OL"
Dual Bridge:
 ≤ 2000 kg "-DUAL"
 > 2000 kg "-DUAL"
Extended Temperature Range:
 -45 to 93°C (-50 to 200°F) "-TC1"
 -45 to 177°C (-50 to 350°F) "-TC2"
Watertight Cable Exit: "-WTC"
Additional Cable Length Available
Note: 100,000 lb capacity load cells are supplied with 2 eyebolts for easy handling.

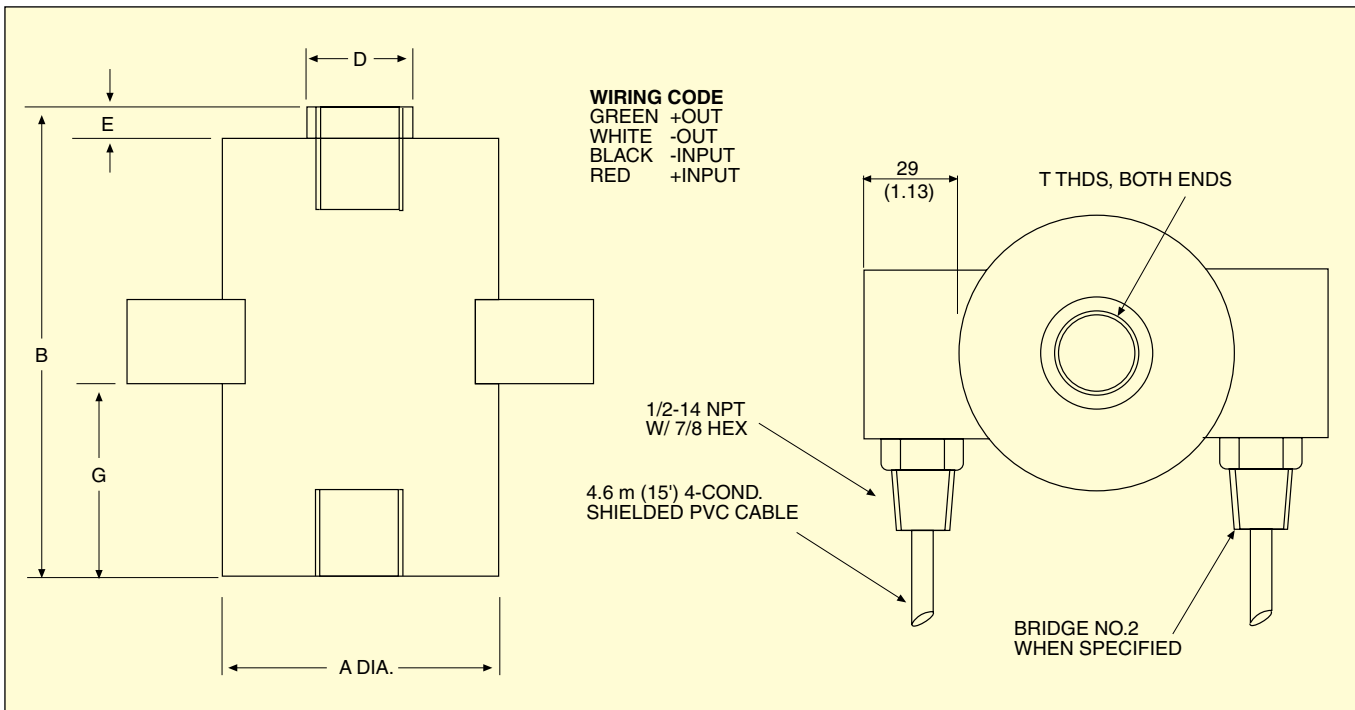

Dimensions: mm (inch)

CAPACITY		A	B	D	E	G	T
50 to 300 lb	23 to 136 kg	89 (3.5)	114 (4.50)	22 (0.87)	6.4 (0.25)	76 (3.00)	3/8-24 UNF x 3/8 DP
500 to 3000 lb	227 to 1361 kg	89 (3.5)	116 (4.56)	38 (1.5)	6.4 (0.25)	32 (1.25)	1/2-20 UNF x 1/2 DP
5000 to 15,000 lb	2269 to 6806 kg	89 (3.5)	151 (5.94)	33 (1.3)	9.7 (0.38)	71 (1.81)	1-14 UNS x 1 1/4 DP
20,000 to 30,000 lb	9074 to 13,612 kg	114 (4.5)	216 (8.5)	58 (2.3)	13 (0.50)	197 (2.81)	1 1/2 UNF x 2.0 DP
50,000 lb	22,686 kg	168 (6.63)	291 (11.44)	71 (2.8)	16 (0.62)	81 (3.19)	2-12 UN x 2 5/8 DP
100,000 lb	13,612 kg	219 (8.63)	451 (17.75)	102 (4.0)	29 (1.13)	125 (4.94)	3-8 UN x 4 1/2 DP

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [omega manufacturer](#):

Other Similar products are found below :

[PX309-5KGI](#) [SMPW-J-M](#) [5SC-TT-T-36-36](#) [5SRTC-TT-K-30-72](#) [MJP2-12-T](#) [CASS-116U-12](#) [CHAL-002](#) [DH-1-20-J-12](#) [GG-J-24-SLE-1000](#)
[HPC-AU-P](#) [HPC-IR-P](#) [KHSS-18G-RSC-12](#) [KMQIN-125U-6](#) [KMQXL-125G-12](#) [KMQXL-125U-6](#) [KQSS-18G-6](#) [KQXL-14U-36](#) [KQXL-](#)
[18G-12](#) [NB3-CAXL-14U-18](#) [PX309-100AI](#) [PX309-100AV](#) [PX309-100GV](#) [PX319-V050G5V](#) [PX319-V100G5V](#) [PX319-002GI](#) [PX319-](#)
[050GI](#) [PX319-100GV](#) [PX319-200AV](#) [PX319-200A5V](#) [PX319-300G5V](#) [PX319-500G5V](#) [PX319-7.5KGI](#) [PX319-7.5KG5V](#) [PX329-1KG5V](#)
[PX329-10KGI](#) [PX329-2KGI](#) [PX409-015VUSBH](#) [PX409-015VV](#) [PX409-050A5V](#) [PX409-1.0KGUSBH](#) [PX409-10WVI](#) [PX409-100A5V](#)
[PX409-5.0KG5V](#) [PX409-500GUSBH](#) [PX41T0-300GI](#) [PX419-250GI](#) [P10R-005](#) [SA1-RTD-4W-120](#) [SA1-T-72-SRTC](#) [SA1XL-K-SRTC](#)