108TX Industrial Ethernet Switch

N-Tron Networking Series

Unmanaged Industrial Ethernet Switch

The N-TRON[®] 108TX is a low cost, unmanaged eight port Industrial Ethernet switch. It is housed in a hardened, metal, DIN-Rail enclosure, and is designed for use in mission critical data acquisition, control, and Ethernet I/O applications.

PRODUCT FEATURES

- Compact, Space Saving Package
- Full IEEE 802.3 Compliance
- American Bureau of Shipping (ABS) Type Approval
- EN50155 for Railway Applications
- Eight 10/100BaseTX RJ-45 Ports
- Unmanaged Operation
- Extended Environmental Specifications
 - -40°C to 70°C Operating Temperature
 - >2M Hours MTBF
- Supports Full/Half Duplex Operation
- Up to 1.6 Gb/s Maximum Throughput
- MDIX Auto Sensing Cable
- Auto Sensing Speed and Flow Control
- Full Wire Speed Communications
- Store-and-Forward Technology
- Redundant Power Inputs (10-30 VDC)
- ESD Protection Diodes on all Ports
- Surge Protection Diodes on Power Inputs
- LED Link/Activity Status Indication
- Hardened Metal DIN-Rail Enclosure

PRODUCT OVERVIEW

The 108TX industrial network switch is designed to meet the most demanding industrial communications requirements while providing high throughput and minimum downtime.

The 108TX provides eight RJ-45 auto sensing 10/100BaseTX ports. All ports are full/half duplex capable, using leading-edge Ethernet switching technology. The 108TX auto-negotiates the speed and flow control capabilities of the eight TX port connections, and configures itself automatically.

Since the 108TX is auto sensing, there will be no need to make extensive wiring changes if upgrades are made to host computers, plant systems, or Ethernet I/O modules. The switching fabric simply scales up or down automatically to match specific network environments.





The 108TX supports up to 2,000 MAC addresses, enabling these products to support extremely sophisticated and complex network architectures.

The 108TX is an ideal candidate for upgrading existing hubs and repeaters to increase bandwidth and determinism by virtually eliminating network collisions. The 108TX combines affordability and the plug & play simplicity of the unmanaged hub.

The 108TX can simplify plant wiring by eliminating the need to bring data acquisition and control network connections back to a climate controlled environment. The 108TX has extended operating environmental specifications to meet the harsh needs of the industrial environment. For cost savings and convenience the network switch can be DIN-Rail mounted alongside Ethernet I/O or other Industrial Equipment.

To increase reliability the 108TX includes dual redundant power inputs. LEDs are provided to display the link status and activity of each port.



108TX SPECIFICATIONS

Case Dimensions

Height:	3.5"	(8.9 cm)
Width:	1.5"	(3.8 cm)
Depth:	3.6"	(9.0 cm)
Weight:	0.7 lbs.	(0.4 kg)
DIN-Rail:	35mm	

Electrical

Input Voltage: Steady Input Current: Inrush: BTU/hr: 10-30VDC 250mA@24V 8.1Amp/0.7ms@24V 20.5@24VDC

Environmental

Operating Temperature: Storage Temperature: Operating Humidity: -40°C to 70°C -40°C to 85°C 10% to 95% (Non Condensing) 0 to 10,000 ft.

>2 Million Hours

Operating Altitude:

Reliability

MTBF:

Network Media

10BaseT: 100BaseTX:

Connectors

10/100BaseTX:

Eight (8) RJ-45 Copper Ports

>Cat3 Cable

>Cat5 Cable

Recommended Wiring Clearance

Front:	2" (5.08 cm)
Тор:	1" (2.54 cm)

Ordering Information

108TXEight 10/100BaseTX Ports, 10-30VDC100-MDR-2Metal Din Rail Option*NTPS-24-1.3DIN-Rail Power Supply 24V@1.3 Amp* MDR option must be specified with switch order - not field upgradable

BENEFITS

Industrial Network Switch

- · Compact Size / Small Footprint
- Extended Environmental Specifications
- Hardened Metal DIN-Rail Enclosure
- High Performance
- High MTBF >2M Hours
- ESD Protection Diodes on all Ports
- Surge Protection Diodes on Power Inputs

Ease of Use

- Plug & Play Operation
- Auto Sensing 10/100BaseTX
- Auto Negotiation Full/Half Duplex
- MDIX Auto Cable Sensing
- Unmanaged Operation

Increased Performance

- Full Wire Speed Capable
- Full Duplex Capable
- Eliminates Network Collisions
- Increases Network Determinism

Regulatory Approvals

FCC Title 47 Part 15 Class A ICES-003- Class A CE: EN61000-6-2:2001; ,EN61000-6-4:2001 EN61000-4-2,3,4,5,6 EN55011:1998+A1: 1999+A2: 2002 - Class A


UL Listed (US and Canada) 1604


ANSI/ISA-12.12.01-2000, Class I, Div 2, Groups A,B,C,D,T4A;

ABS Type Approval for Shipboard Applications DNV-GL Type Approval Certification EN50155 for Railway Applications GOST-R Certified; RoHS Compliant


Designed to comply with: IEEE 1613 for Electric Utility Substations; NEMA TS1/TS2 for Traffic Control Equipment



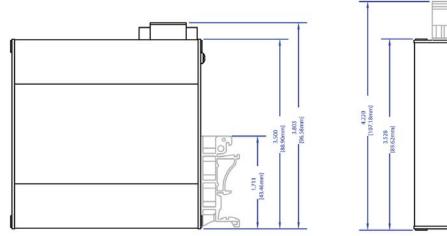



0



3.500 88,90mml 3.803 [96.58m

0.262

[6.67mm]



www.redlion.net

Americas sales@redlion.net

Asia-Pacific asia@redlion.net

Europe Middle East Africa europe@redlion.net

+1 (717) 767-6511

As the global experts in communication, monitoring and control for industrial automation and networking, Red Lion has been delivering innovative solutions for over forty years. Our automation, Ethernet and cellular M2M technology enables companies worldwide to gain real-time data visibility that drives productivity. Product brands include Red Lion, N-Tron and Sixnet. With headquarters in York, Pennsylvania, the company has offices across the Americas, Asia-Pacific and Europe. Red Lion is part of Spectris plc, the productivity-enhancing instrumentation and controls company. For more information, please visit www.redlion.net.

0

63

0.900

3

[22.86mm]

Ø

1.833

ADLD0315 062717 © 2017 Red Lion Controls, Inc. All rights reserved. Red Lion, the Red Lion logo, N-Tron and Sixnet are registered trademarks of Red Lion Controls, Inc. All other company and product names are trademarks of their respective owners.

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for red lion manufacturer:

Other Similar products are found below :

 IFMA0035
 SL-5ES-1
 LD400400
 PAXI0020
 WI0006OF
 508TX-A
 PAX2A000
 ZBH06002
 CBLGEN01
 1000-POE+
 CUB4LP40
 SLX

 8ES-1
 TORF1000
 WF1000BF
 FANWAND721SMA
 FCOPPER-SFP-100
 PSDR060W
 SLX-5ES-1
 309FXE-ST-15

 CRM000CMCMOD0000
 CRM000CMDN000000
 CR1000100000210
 CR30001000000420
 PAXDP000
 NT24K-16M12-POE-PT
 NT24K

 16M12-POE-R
 NT24K-16M12-POE-R-PT
 NT24K-16M12-PT
 NT24K-16M12-R-PT
 IAMA6262
 FMFIBER-SFP-4K
 PAXS0000

 CCARPG01
 PAXLA000
 CUB4CL20
 PSAC0000
 CUB5USB0
 516TX
 102MCE-SC-15
 304TX
 CUB5TCB0
 LMPCC000
 ENC5A000

 ENC8A000
 308TX
 508TX
 7018TX
 708FX2-SC
 516TX-A
 C48CS003