

6438 Mini Push Button


herga

Technology Ltd

- Compact size
- Choice of button/escutcheon materials
- Low profile above surface
- Choice of colours
- Choice of tube options
- Large air volume for longer tube lengths



Reference dimensions

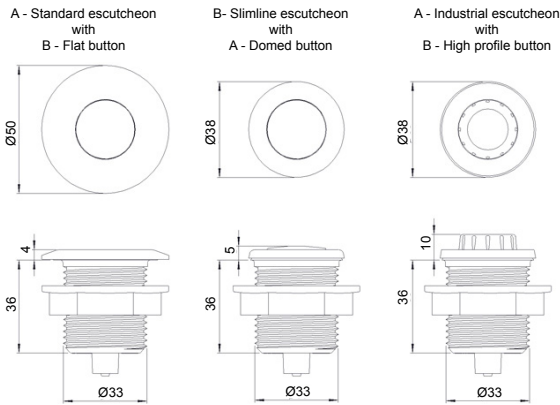

PANEL HOLE MUST NOT EXCEED 35.0 MM DIA. FOR ALL VERSIONS

Ordering and options

Stock models : 6438-ACAC-AB00
6438-ABAB-AB00

6438 - [] [] [] [] - [] [] [] []

Model

Escutcheon type -

- A Standard
- B Slimline
- C Industrial
- Z No escutcheon required

Escutcheon finish -

- A White
- B Brilliant white
- C Chrome
- D Gold
- F Black
- Z None supplied

Button type -

- A Domed
- B Flat with textured finish
- C High profile
- Z None supplied

Button finish -

- A White
- B Brilliant white
- C Chrome
- D Gold
- F Black
- Z None supplied

Bellows type & spout diameter

- A Silicone bellows Ø4 mm
- B Silicone bellows Ø2 mm
- C Standard bellows Ø4 mm
- D Standard bellows Ø2 mm

Nut & washer option

- A Supplied with nut only
- B Supplied with nut & washer
- Z No nut & washer required

General specifications

Standards/approvals	n/a
Degree of protection	EN 60529 IPX4
Connection method	Via back entry spout, Ø4mm or Ø2mm
Electrical rating	n/a
Contact configuration	n/a
Pressure range	Compatible with 6871, 6872, 6773, 6753, 6891, 6893, 6861, 6862, 6863, 6864, 6869 - dependent on tube length

Operating temperature range	-10°C to +40°C
Body material	Thermoplastic
Weight	Plastic - 0.03Kg
Additional information	A longer threaded body version to suit up to 50mm panels is available upon request



Herga Technology Ltd - Northern Way - Bury St. Edmunds - Suffolk - IP32 6NN - UK
sales@herga.com • www.herga.com • +44 (0)1284 701422

Subject to change without notice

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for [herga manufacturer](#):

Other Similar products are found below :

[6433-0019](#) [6289-PP](#) [6254-OB](#) [6442-OW](#) [6438-ACAC-AB00](#) [6227-0004](#) [6289-01](#) [6251-BAAA-CBZ0](#) [6226-0003](#) [6438-ABAB-AB00](#) [6289-CC](#) [6753-AEJA-A000](#) [6448-AAAB-0000](#) [6871-0C](#)