

Profinet Type A Multipair Cable **pro-POWER**

**RoHS
Compliant**



Application

This multipair Profinet Type A cable with solid copper conductors for the cabling of industrial field bus systems with the globally accepted TCP/IP protocol. Suitable for fixed or flexible applications. Cable properties include a high active and passive interference resistance. They are free from paint wetting disruptive substances (LABS-free).

Characteristics

Voltage Rating (Uo/U)	: 300V
Temperature Rating	: Fixed: -20°C to +70°C
Minimum Bending Radius	: Fixed: 7.5 × overall diameter Flexed: 15 × overall diameter


Cable Standards

BS EN/IEC 50288-1, BS EN/IEC 61156-2, EN 50396



UK Laboratory Tested

This product is subject to the Quality Assurance protocols of The Cable Lab®, a UKAS accredited ISO 17025 cable testing laboratory. Testing includes vertical flame, conductor resistance, tensile & elongation, and dimensional consistency, verified to published standards and approved product drawings.

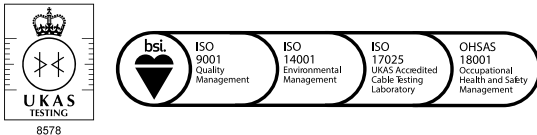

Regulatory Compliance

This cable meets the requirements of the Low Voltage Directive 2014/35/EU and the RoHS Directive 2011/65/EU. RoHS compliance has been tested and confirmed by The Cable Lab® as meeting the requirements of the BSI RoHS Trusted Kitemark™.



Construction

Conductor

Class 1 solid copper conductor

Insulation

LSZH (Low Smoke Zero Halogen)

Bedding

LSZH (Low Smoke Zero Halogen)

Profinet Type A Multipair Cable **pro-POWER**

Screen 1

AL/PET (Aluminium Polyester Tape)

Screen 2

TCWB (Tinned Copper Wire Braid)

Sheath

LSZH (Low Smoke Zero Halogen)

Core Identification

White and Blue

Yellow and Orange

Sheath Colour

Green

Dimensions

No. of Pairs	Nominal Conductor Diameter mm ² (AWG)	Nominal Diameter Insulation mm	Nominal Bedding Diameter mm	Nominal Overall Diameter mm	Nominal Weight kg/km
2	0.34 (22)	1.43	4.2	6.5	74

Electrical Characteristics

Max. DC Conductor Resistance Ω /km	Capacitance pF/km		Min. Insulation Resistance $G\Omega \times km$	Impedance Ω	Nominal Propagation Velocity	Delay Skew ns/100m	Dielectric Strength kVac / 1 min	
	Core/Core	Unbalanced					Core/Core	Unbalanced
56.4	52	1600	5	100	67%	50	1.5	1

Part Number Table

Description	Reel Length	Part Number
Profinet Type A Multipair Cable	100m	PP001545

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. pro-POWER is the registered trademark of the Group. © Premier Farnell Limited 2016.

X-ON Electronics

Authorized Distributor

Click to view similar products for [Pro Power manufacturer](#).

Other Similar products are found below :

[PPCY4C075100M](#) [PPCY3C10050M](#) [PPC217](#) [PP001328](#) [PP001316](#) [PP001109](#) [PP001088](#)

[PP000940](#) [PP030](#) [PP000909](#) [PP001326](#) [PP001308](#) [PP000877](#) [PP000868](#) [PP000704](#)

[PP001163](#) [PP001156](#) [PP001085](#) [PP000510](#) [PP001076](#) [PP000944](#) [PP000914](#) [PP000407](#)

[PP000386](#) [PP000870](#)