
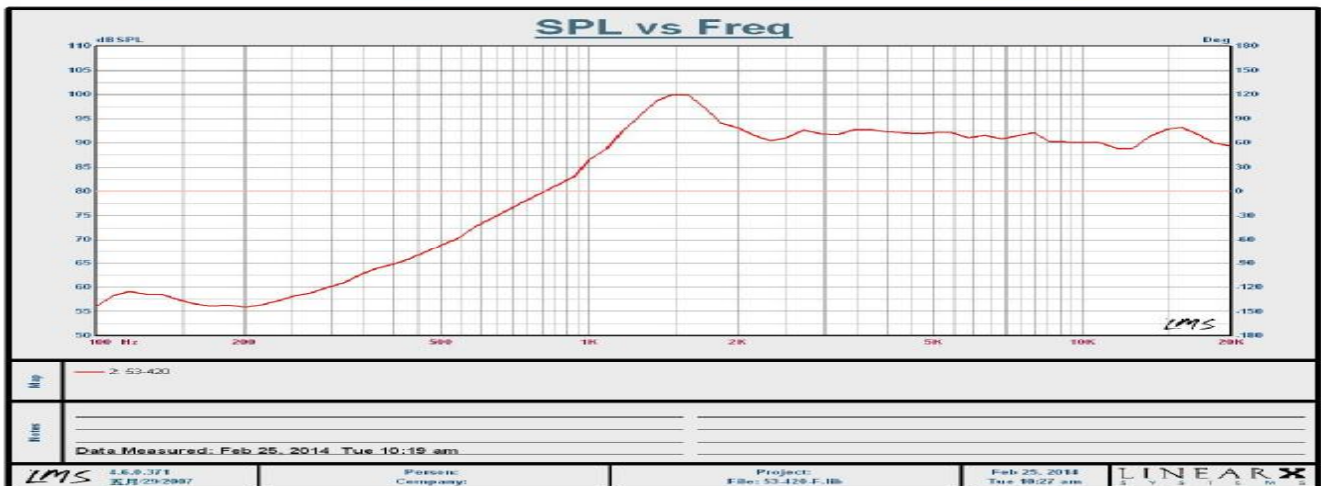


<b>ITEMS:</b>	<b>SPECIFICATION:</b>	<b>VOICE COIL:</b>	
Dimensions	102mm ( 3" Tweeter )	Diameter	13.28 (mm)
Impedance	8ohm	Length	2.4 (mm)
Input	RATED - 50W Max	Layer	2 (mm)
Free air resonance	1500Hz ±300Hz	Former material	ASV
Sensitivity	94 ± 2dB (W/M) 2.83V	Wire material	Copper
Frequency range	1,500 ~ 20,000Hz	<b>CONE PAPER:</b>	
Sine wave test	4.9V	Cone material	Paper
Weight	156grams	Surround material	Paper
Life test	50W, 8H , EIA white noise through 3.3µF filter	<b>MAGNET:</b>	
		(1)	(2)
		Diameter	45 (mm)
		Height	8 (mm)
		Quantity	1
		Weight	48 (g)
		Gap(H)	3 (mm)

<b>PARAMETERS:</b>					
DC resistance	Re:	6.4 (Ω)	Moving mass	Mms:	(g)
Resonance frequency	Fs:	1,400 (Hz)	Equivalent volume	Vas:	(l)
Maximum impedance	Zm:	(Ω)	Sensitivity	SPL:	(dB)
Mechanical Q factor	Qms:		Suspension compliance	Cms:	(mm/N)
Electrical Q factor	Qes:		BL product	Bl:	(N/A)
Total Q factor	Qts:		Driver piston diameter	D:	(mm)
Linear Displacement	Xmax:	(mm)	Voice Coil Inductance	Le(10K):	0.106 (mH)

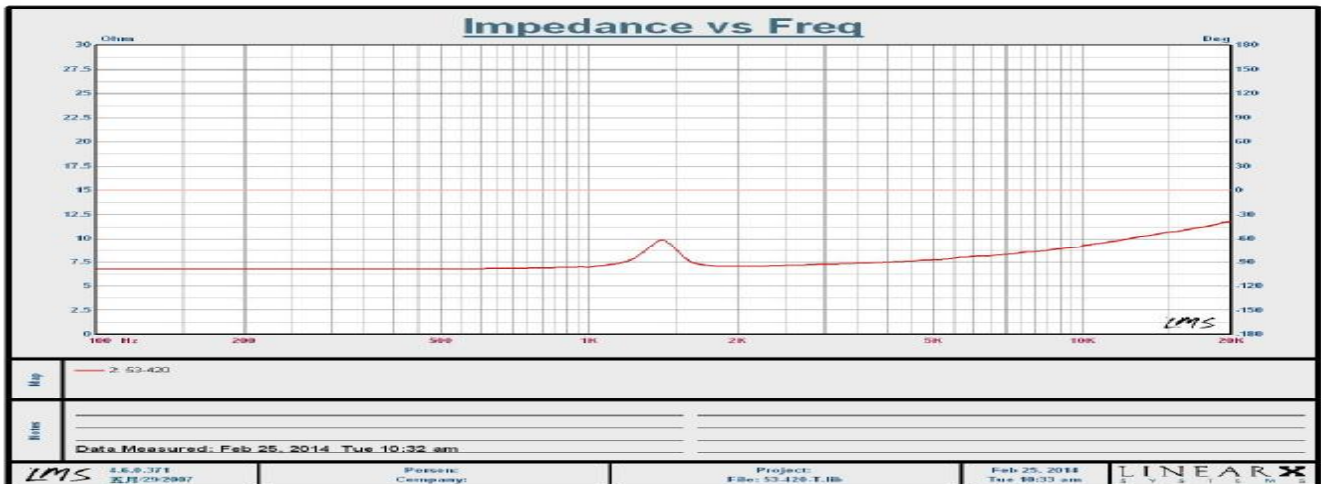

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [mcm manufacturer](#):*

Other Similar products are found below :

[NWTBATCAPMB13](#) [27-505](#) [27-4200](#) [27-840](#) [28-5958](#) [50-10820](#) [28-1510](#) [27-5918](#) [27-5977](#) [24-12352](#) [287-14020](#) [28-6023](#) [35SPS-3](#) [28-6008](#) [21-4605](#) [21-4575](#) [21-19084](#) [21-12825](#) [27-570](#) [28-1525](#) [83-17604](#) [27-5833](#) [27-6020](#) [24-12345](#) [28-6017](#) [28-6032](#) [21-18966](#) [30-1530](#) [28-970](#) [27-560](#) [26-120](#) [CA68B](#) [24-12344](#) [28-6005](#) [24-13075](#) [PCM-2100-50](#) [21-18956](#) [28-6080](#) [24-5360](#) [24-1040](#) [27-5917](#) [28-6031](#) [HD15MM35N-100F](#) [28-975](#) [27-4270](#) [85-11102](#) [27-5940](#) [27-5949](#) [27-6112](#) [HD15MM35N-6F](#)