
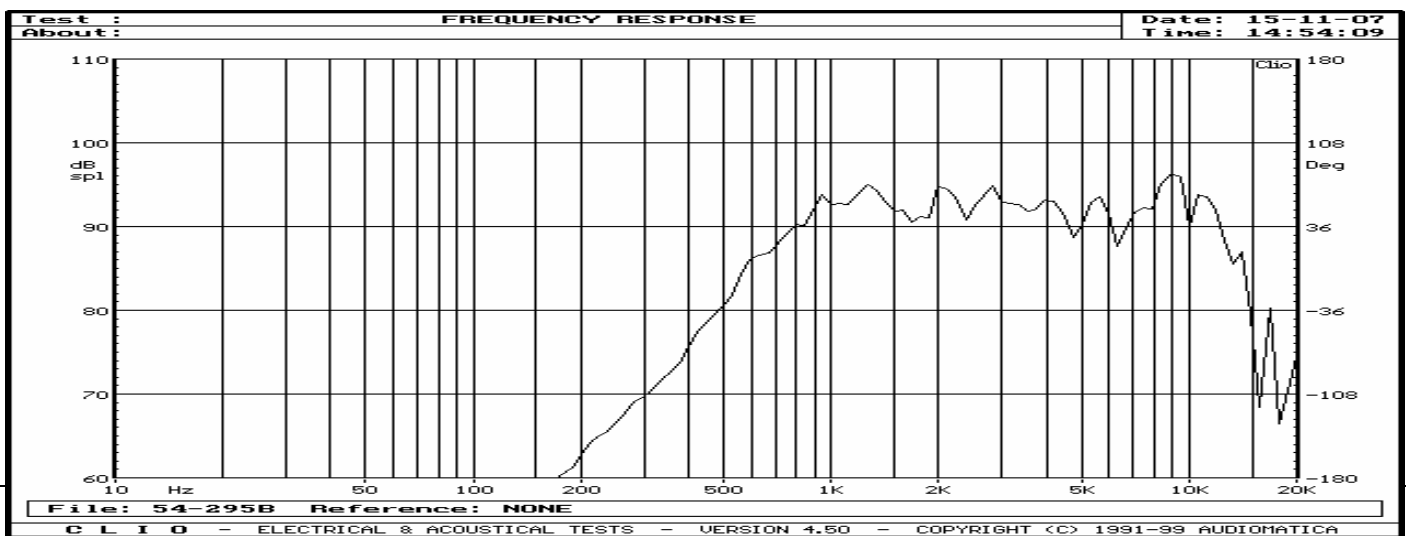


# Specifications: MCM #54-295


DATE:2007/ 11/15

<b>ITEMS:</b>	<b>SPECIFICATION:</b>	<b>VOICE COIL:</b>
Dimensions	120mm ( 4")	Diameter 14.28 (mm)
Impedance	8ohms	Length 4.1 (mm)
Input	<b>RATED 50W RMS</b>	Layer 2 (mm)
Free air resonance	700 ± 140Hz	Former material ASV
Sensitivity	94 ± 2dB (W/M) 2.83V	Wire material Copper
Frequency range	700 ~ 12000Hz	<b>CONE PAPER:</b>
Sine wave test	4.9V	Cone material Paper
Weight	300g	Surround material
Life test	50W, 8H , EIA white noise	<b>MAGNET:</b> (1) (2)
		Diameter 60 (mm)
		Height 10 (mm)
		Quantity
		Weight 101 (g)
		Gap(H) 3 (mm)

<b>PARAMETERS:</b>			
DC resistance	Re:	6.4 (Ω)	Moving mass Mms:
Resonance frequency	Fs:	614.41 (Hz)	Equivalent volume Vas:
Maximum impedance	Zm:	10.17 (Ω)	Sensitivity SPL:
Mechanical Q factor	Qms:	3.86	Suspension compliance Cms:
Electrical Q factor	Qes:	6.56	BL product Bl:
Total Q factor	Qts:	2.43	Driver piston diameter D:
Linear Displacement	Xmax:	-	Voice Coil Inductance Le:
			0.77mH

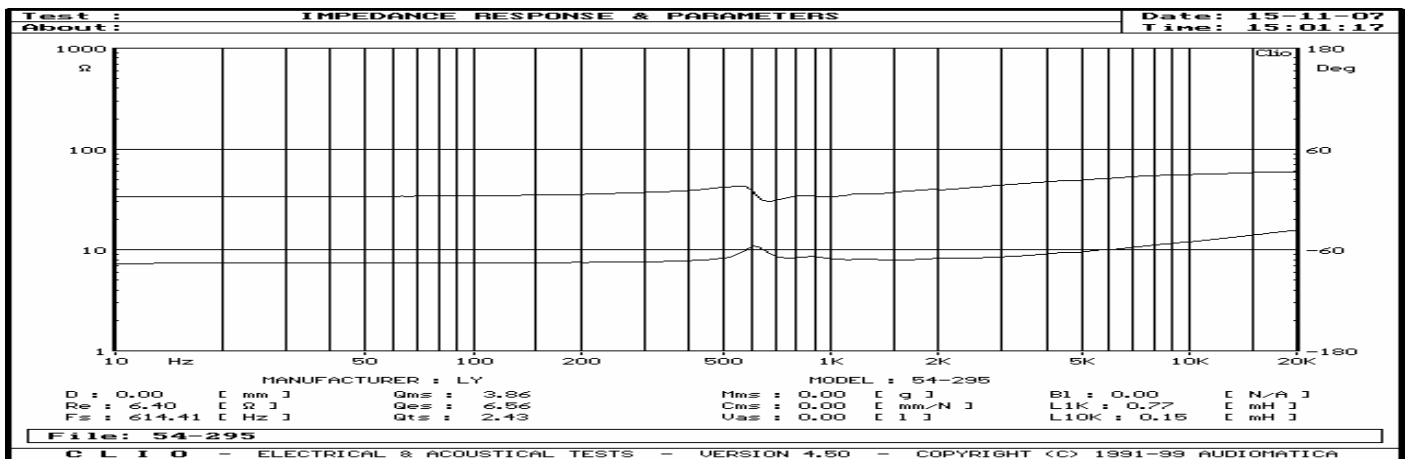

54-2  
80  
MADE IN

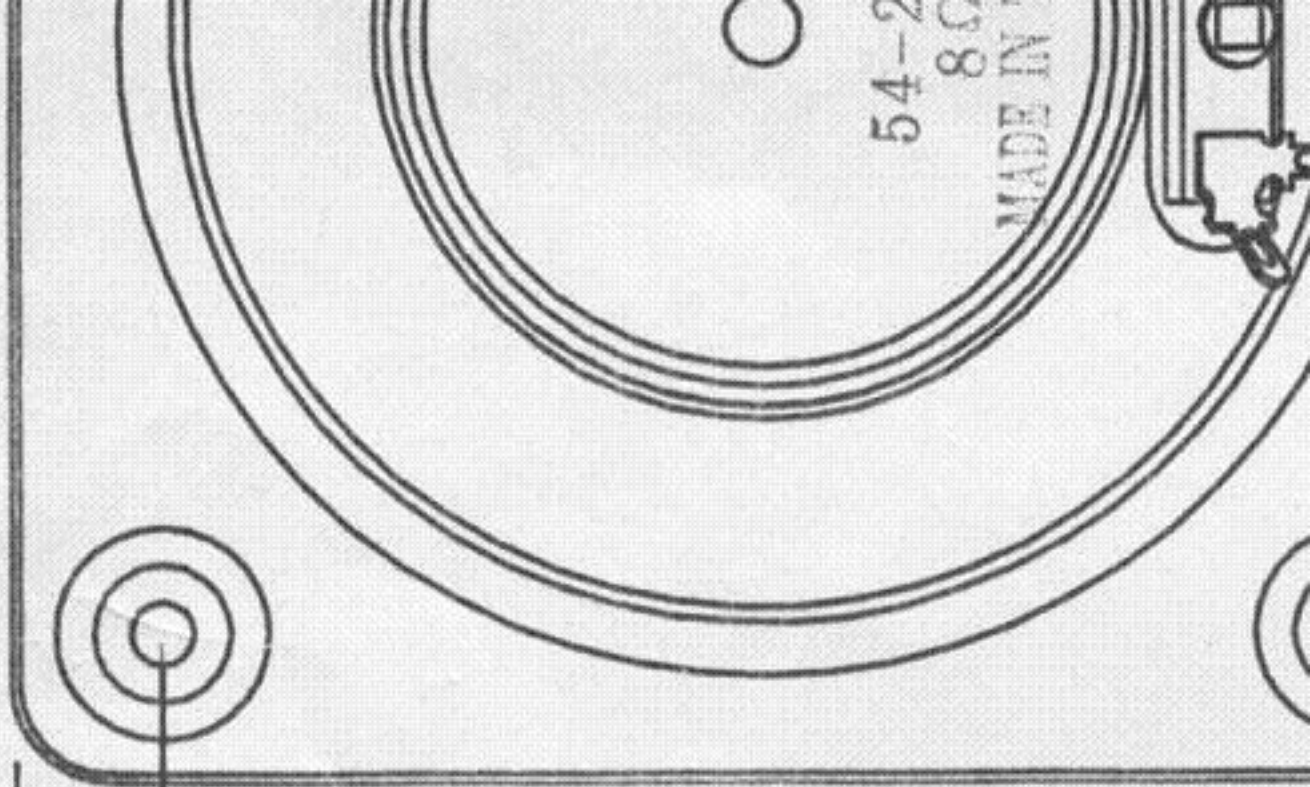

□ 96<sup>±0.2</sup>


□ 120<sup>±0.3</sup>

□ 120<sup>±0.3</sup>

∅ 94.5<sup>±0.2</sup>

∅ 60<sup>±1.2</sup>

6.3<sup>±0.2</sup>

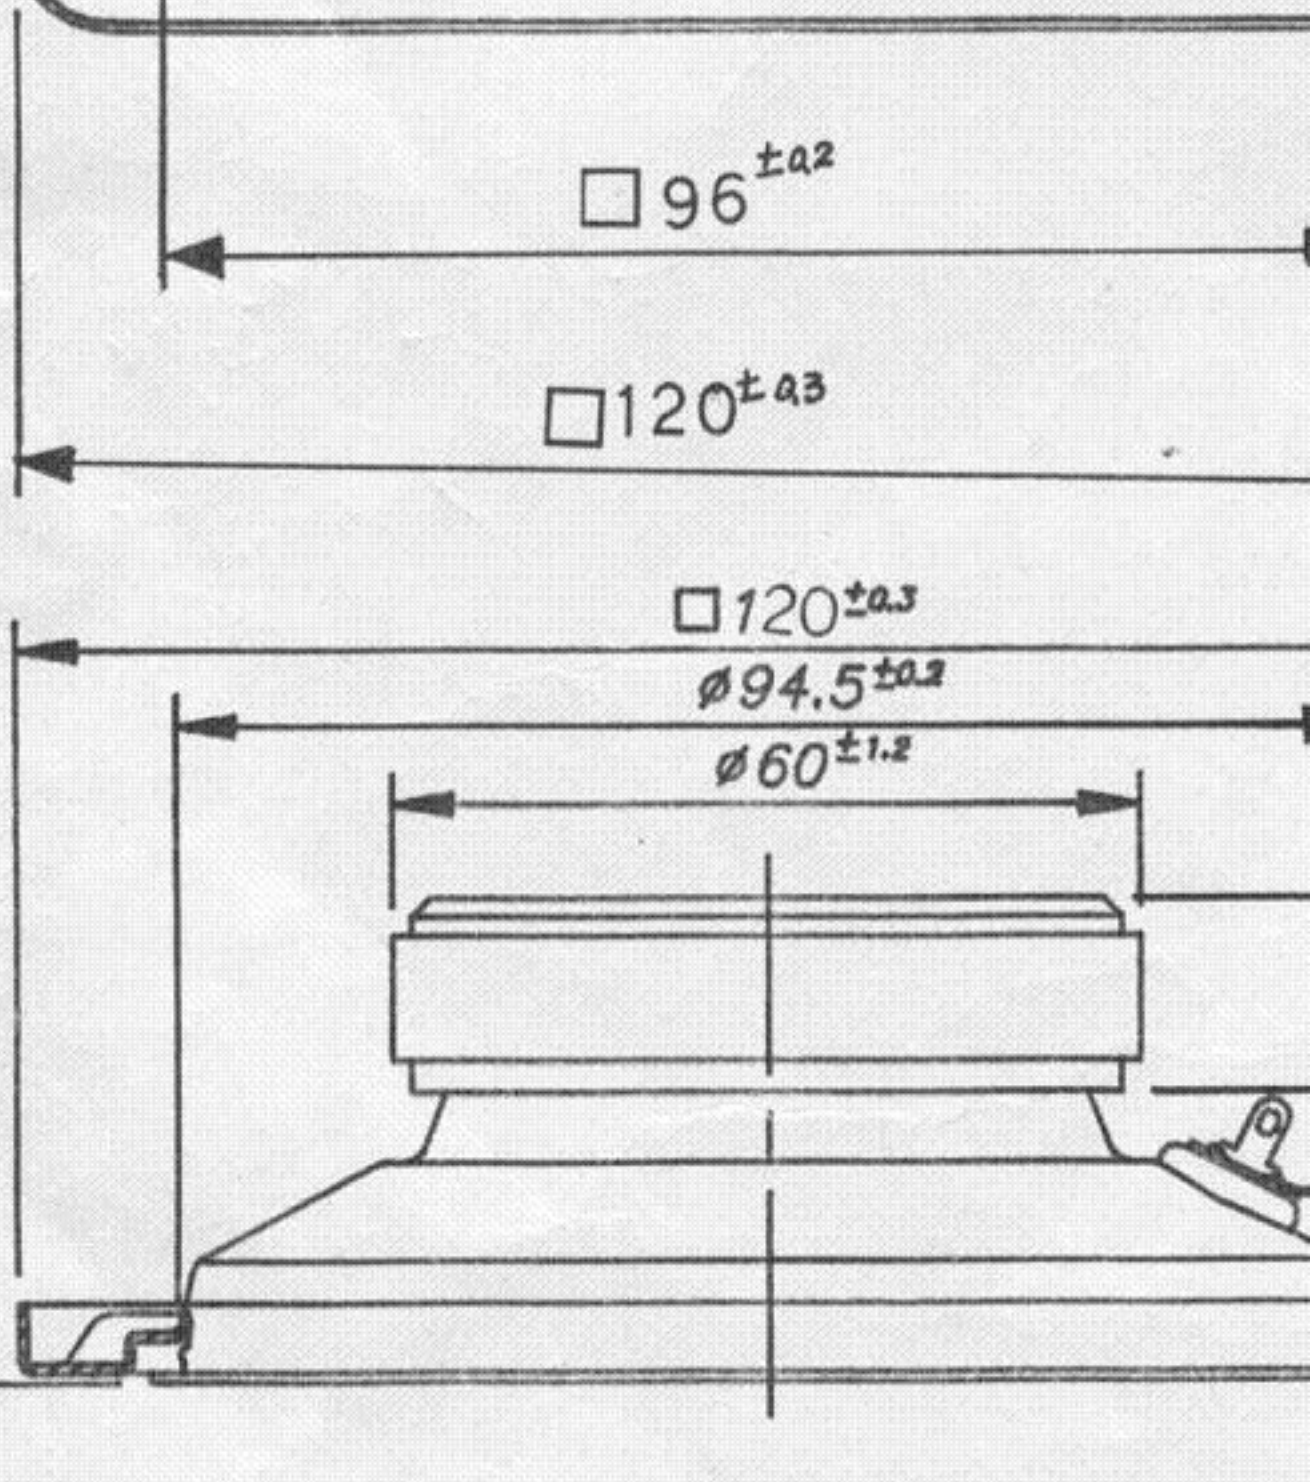

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [mcm manufacturer](#):*

Other Similar products are found below :

[NWTBATCAPMB13](#) [27-505](#) [27-4200](#) [27-840](#) [28-5958](#) [50-10820](#) [28-1510](#) [27-5918](#) [27-5977](#) [24-12352](#) [287-14020](#) [28-6023](#) [35SPS-3](#) [28-6008](#) [21-4605](#) [21-4575](#) [21-19084](#) [21-12825](#) [27-570](#) [28-1525](#) [83-17604](#) [27-5833](#) [27-6020](#) [24-12345](#) [28-6017](#) [28-6032](#) [21-18966](#) [30-1530](#) [28-970](#) [27-560](#) [26-120](#) [CA68B](#) [24-12344](#) [28-6005](#) [24-13075](#) [PCM-2100-50](#) [21-18956](#) [28-6080](#) [24-5360](#) [24-1040](#) [27-5917](#) [28-6031](#) [HD15MM35N-100F](#) [28-975](#) [27-4270](#) [85-11102](#) [27-5940](#) [27-5949](#) [27-6112](#) [HD15MM35N-6F](#)