

SPECIFICATIONS


MCM Audio Select Model 55-1862

MCM Audio Select Model 55-1862								
Item:	Specification				VOICE CO	OIL:		
Dimensions	165mm (6.5 ")				Diameter		35.5	(mm)
Impedance	8ohm				Length		12.8	(mm)
Input	RATED 75W, MAX150W				Layer		4	(mm)
Free air resonance		45 ±9Hz			terial	Aluminum		
Sensitivity		$88 \pm 2 dB \text{ (W/M)}, 2.83 V$			ial	Copper		
Frequency range	fo ~ 12000 Hz			CONE PAPER: Aluminum+rubber				
C:			12000	HZ	MAGNET	: (1)	(2)	
Weight	eight 10V				Diameter	110	80	(mm)
Life test		2			Height	20	12	(mm)
		W, 8H, EIA white noise			Quantity			
	Weight				667	226	(g)	
					Gap(H)	6		(mm)
PARAMETERS:								
DC resistance	Re:	5.9	(Ω)	Moving mass	Mms:	23.58	(g)	
Resonance frequency	Fs:	45.28	(Hz)	Equivalent volume	Vas:	12.89	(1)	
Maximum impedance	Zm:	58.72	(Ω)	Sensitivity	SPL:	88.15	(□ B)	
Mechanical Q factor	Qms:	3.49	` /	Suspension compliance	Cms:	0.52	(mm/N)	
Electrical Q factor	Qes:	0.39		BL product	Bl:	10.08	(N/A)	
Total Q factor	Qts:	0.35		Driver piston diameter	D:	130	(mm)	

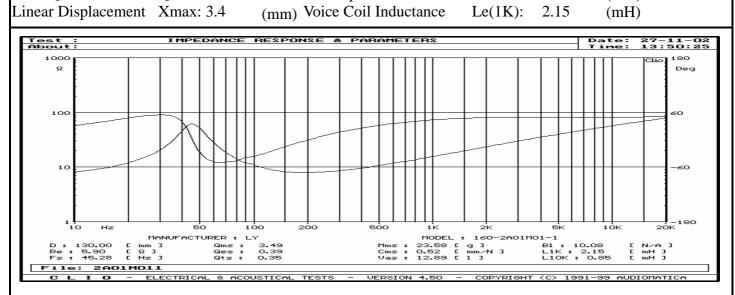

2.15

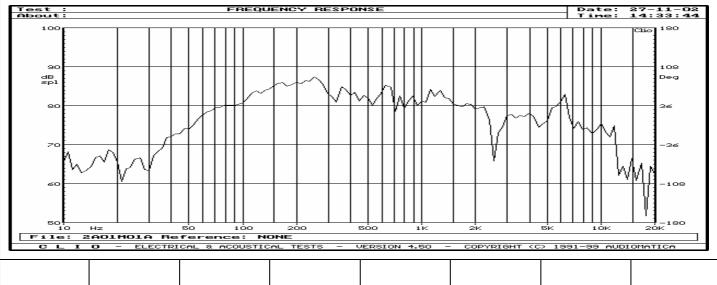

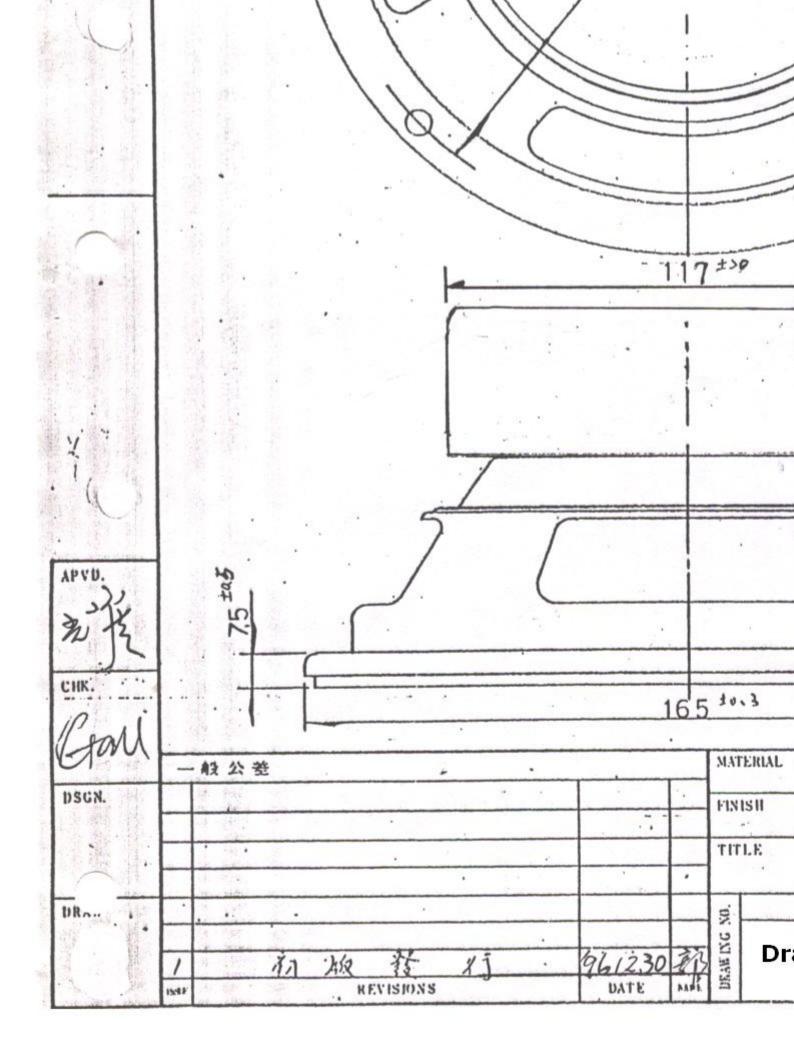

X-ON Electronics

Largest Supplier of Electrical and Electronic Components

Click to view similar products for mcm manufacturer:

Other Similar products are found below:

NWTBATCAPMB13 27-505 27-4200 27-840 28-5958 50-10820 28-1510 27-5918 27-5977 24-12352 287-14020 28-6023 35SPS-3 28-6008 21-4605 21-4575 21-19084 21-12825 27-570 28-1525 83-17604 27-5833 27-6020 24-12345 28-6017 28-6032 21-18966 30-1530 28-970 27-560 26-120 CA68B 24-12344 28-6005 24-13075 PCM-2100-50 21-18956 28-6080 24-5360 24-1040 27-5917 28-6031 HD15MM35N-100F 28-975 27-4270 85-11102 27-5940 27-5949 27-6112 HD15MM35N-6F