
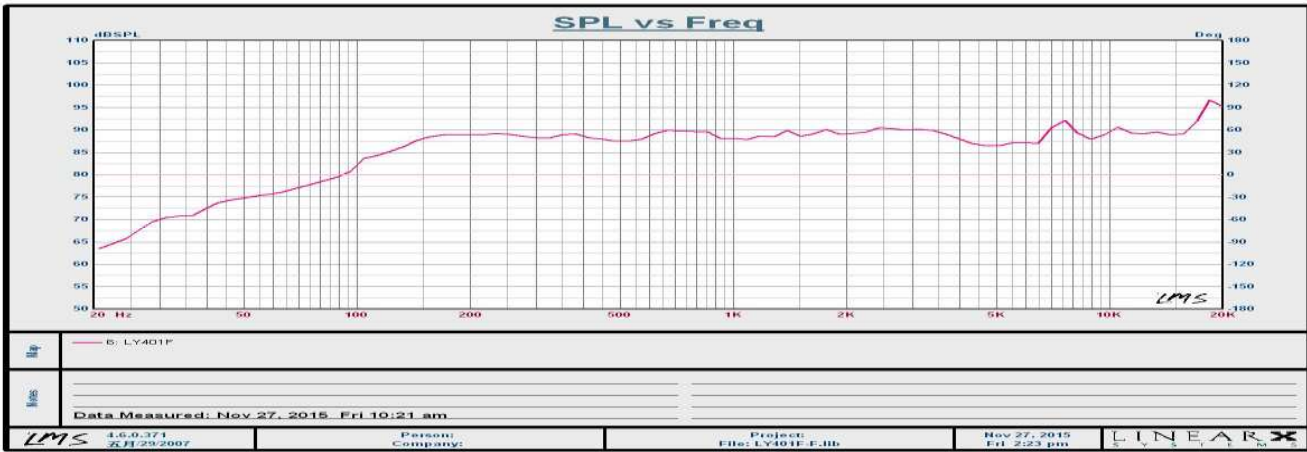



Model #: LY401F-M01

ITEMS:	SPECIFICATION:	VOICE COIL:
Diameter	4"	Diameter 25.4 (mm)
Impedance	6 ohms	Winding Length 7.1 (mm)
Input	RMS 20 W, MAX 40 W	Layer 2
Free air resonance	50 Hz	Former material Kraft KSV
Sensitivity	88 dB ± 2 2.45 V	Wire material Copper SVW
Frequency range	50 ~ 20000 Hz	<b>CONE:</b> Treated paper
Sine wave test	5.5 V	<b>SURROUND:</b> Treated cloth
Weight	1.76 lbs.	<b>MAGNET:</b> (1) (2)
		Diameter 85 (mm)
		Height 15 (mm)
		Material Ferrite Y30
		Quantity 1 pcs
		Weight 354 (grams)
		Gap(H) 4 (mm)
Basket: die cast (aluminum)		

**PARAMETERS:**

DC resistance	Re: 4.3 (Ω)	Moving mass	Mms: 5.66 (grams)
Resonance frequency	Fs: 53.53 (Hz)	Equivalent volume	Vas: 6.48 (l)
Maximum impedance	Zm: 54.2 (Ω)	Sensitivity	SPL: 87.2 (dB)
Mechanical Q factor	Qms: 3.34	Suspension compliance	Cms: 1.56 (mm/N)
Electrical Q factor	Qes: 0.29	BL product	Bl: 5.33 (N/A)
Total Q factor	Qts: 0.26	Driver piston diameter	D: 83 (mm)
Linear Displacement	Xmax: 1.55 (mm)	Voice Coil Inductance	Le(1K): 0.38 (mH)

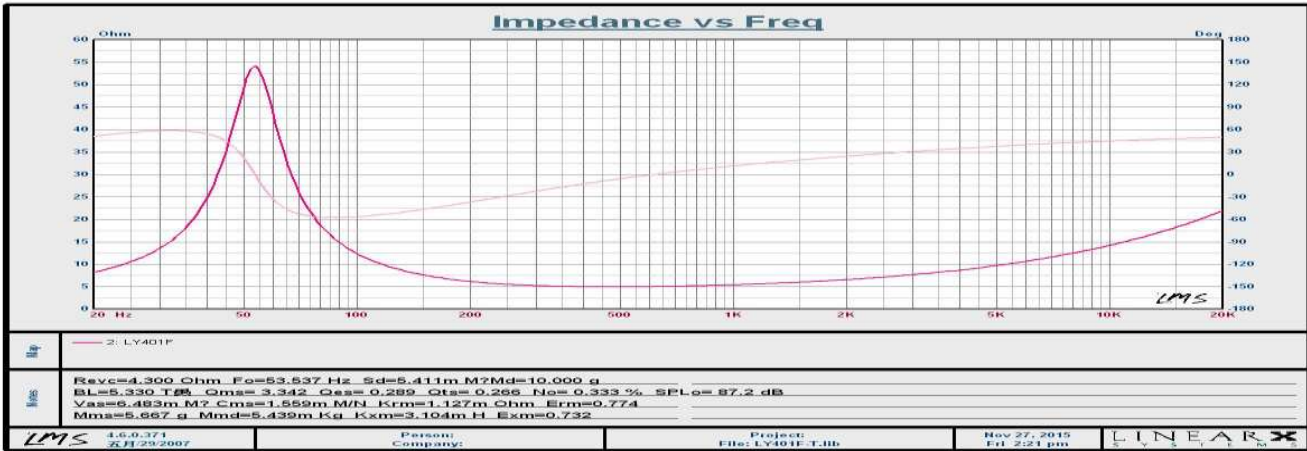

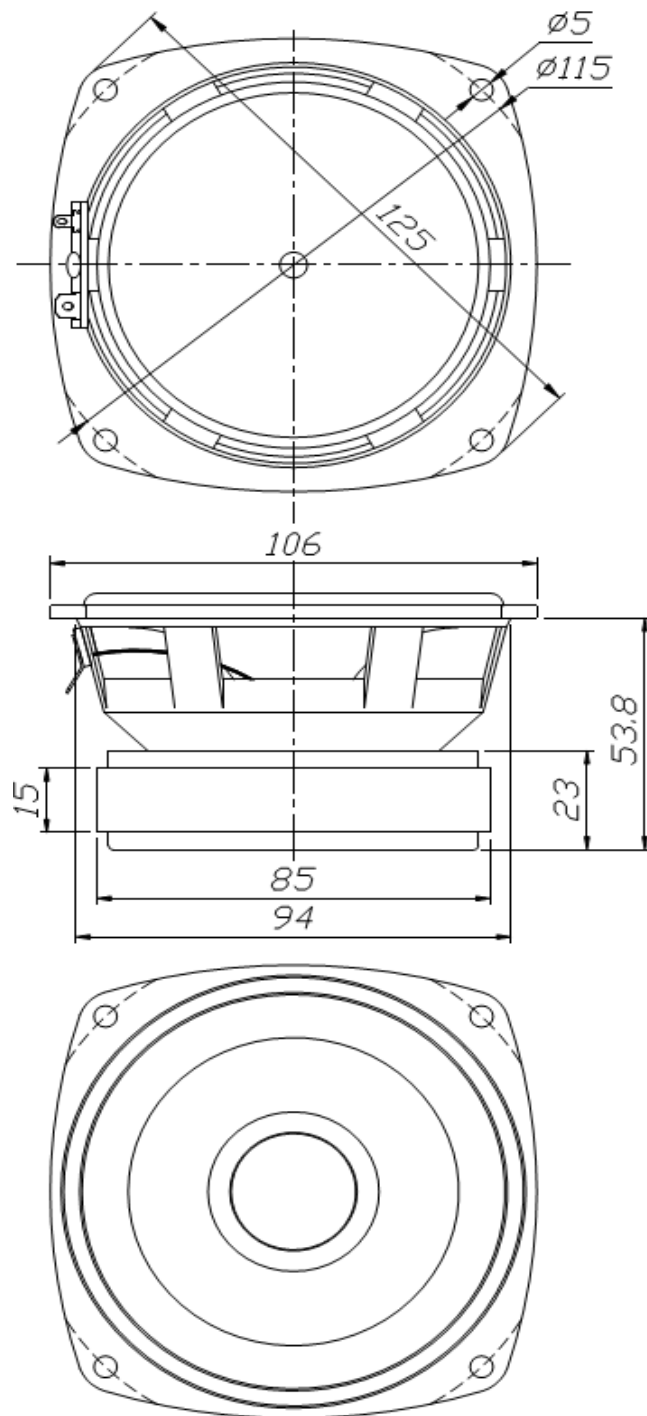

## **X-ON Electronics**

Largest Supplier of Electrical and Electronic Components

*Click to view similar products for [dynavox](#) manufacturer:*

Other Similar products are found below :

[55-5515](#) [55-5500](#) [55-5505](#) [55-5510](#) [55-5520](#) [55-5535](#) [53-5115](#)